


# Underbust with Front and Back Lacing · 6 Panels

*A corset without a busk: it is laced at the front and at the back.*

TECHNICAL DRAWING (from the same draft)

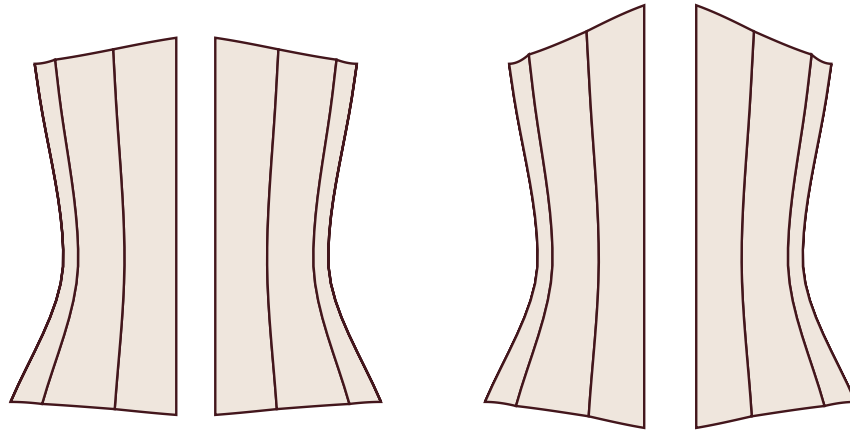

## BODY MEASUREMENTS FOR THIS PATTERN

|                                      |                          |
|--------------------------------------|--------------------------|
| Bust (body)                          | <b>92 cm (36.2 in)</b>   |
| Underbust (body)                     | <b>78 cm (30.7 in)</b>   |
| Waist (body)                         | <b>70 cm (27.6 in)</b>   |
| High hip, 12 cm (4.7 in) below waist | <b>92 cm (36.2 in)</b>   |
| Hip, 20 cm (7.9 in) below waist      | <b>98 cm (38.6 in)</b>   |
| Waist reduction                      | <b>6 cm (2.4 in)</b>     |
| Finished waist (without lacing gap)  | <b>64 cm (25.2 in)</b>   |
| Lacing gap at the back               | <b>4 cm (1.6 in)</b>     |
| Lacing gap at the front              | <b>3 cm (1.2 in)</b>     |
| Center front length                  | <b>29 cm (11.4 in)</b>   |
| Center back length                   | <b>32.5 cm (12.8 in)</b> |

## PATTERN PIECES

- Panel 1 · Center front — 2 fabric + 2 coutil (mirrored)
- Panel 2 · Front — 2 fabric + 2 coutil (mirrored)
- Panel 3 · Front — 2 fabric + 2 coutil (mirrored)
- Panel 4 · Back — 2 fabric + 2 coutil (mirrored)
- Panel 5 · Back — 2 fabric + 2 coutil (mirrored)
- Panel 6 · Center back — 2 fabric + 2 coutil (mirrored)

## ORDER OF CONSTRUCTION

- Cut the 6 panels in fabric and in coutil, mirrored. Mark the waist and the notches.
- Make a toile in canvas first and try it on: the fit is corrected at the seams, never at the center.
- Join the panels in order (1 to 2, 2 to 3...), matching the waist notches. Press the seams open.
- Set eyelets at the center front and stitch the waist tape inside, from side to side.
- Sew the boning channels over each seam (1.2 cm / ½ in) and on both sides of the eyelets.
- Insert the bones (1 cm / ⅜ in shorter than the channel), bind the top and bottom edges and set the marked eyelets.

Pattern drafted with classic pattern-making formulas from the measurements above (one size). Every body is different: always make a sample in scrap fabric before cutting your final fabric, and adjust at the seams. Circles on the pattern: eyelets.

## MATERIALS







Outer fabric: 0.5 m (0.6 yd) (satin, brocade, jacquard or gabardine). Coutil or strong canvas: the same.  
 No busk: front and back lacing (eyelets on panel 1 and on the last panel). Spiral steel bones, 7 mm (¼ in): 14.  
 Metal eyelets, 5 mm with washers: 44. Flat lacing cord: 6 m (6.6 yd). Bias binding for the edges: 2.5 m (2.7 yd).  
 Waist tape (twill), 2.5 cm (1 in) wide: 70 cm (27.6 in).

## HOW TO PRINT

A4: print at 100 % ("Actual size") with "Fit to page" turned off. Follow the assembly map.

Plotter: send the sheet at actual size as it is (the file is already at 1:1 scale).

Before cutting, measure the test square: 10 × 10 cm (3.94 × 3.94 in).

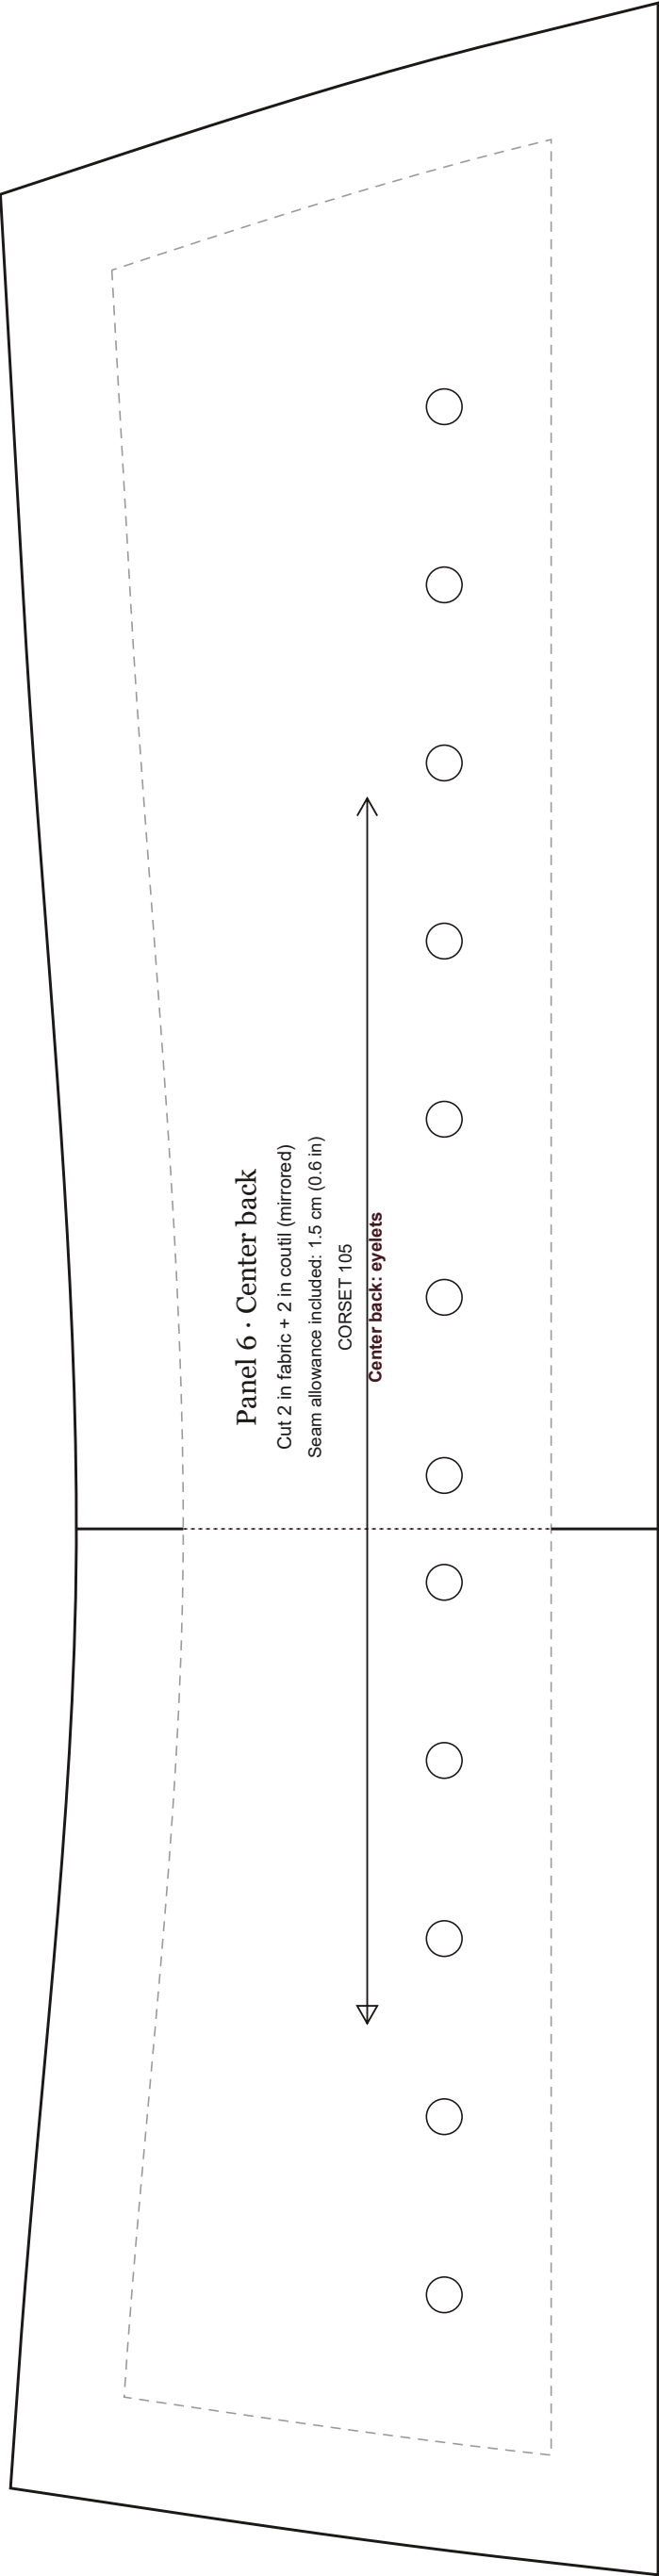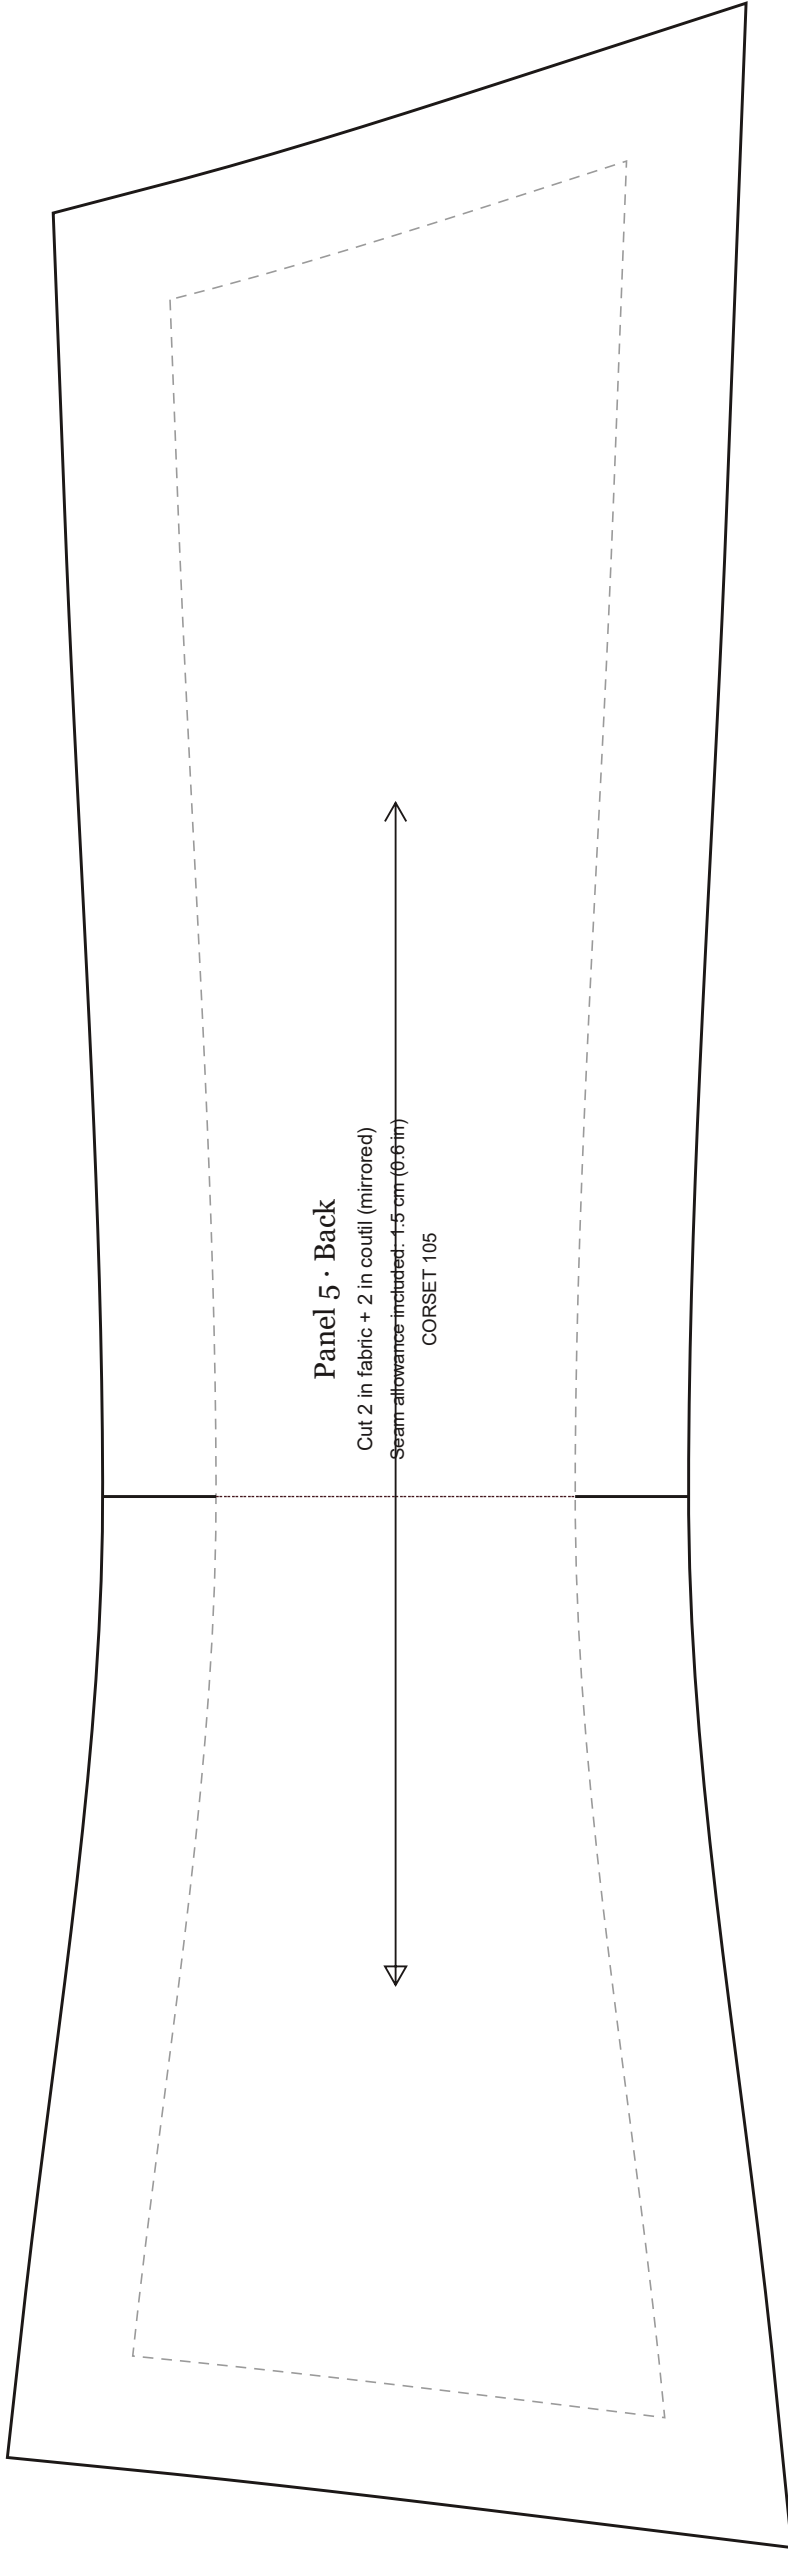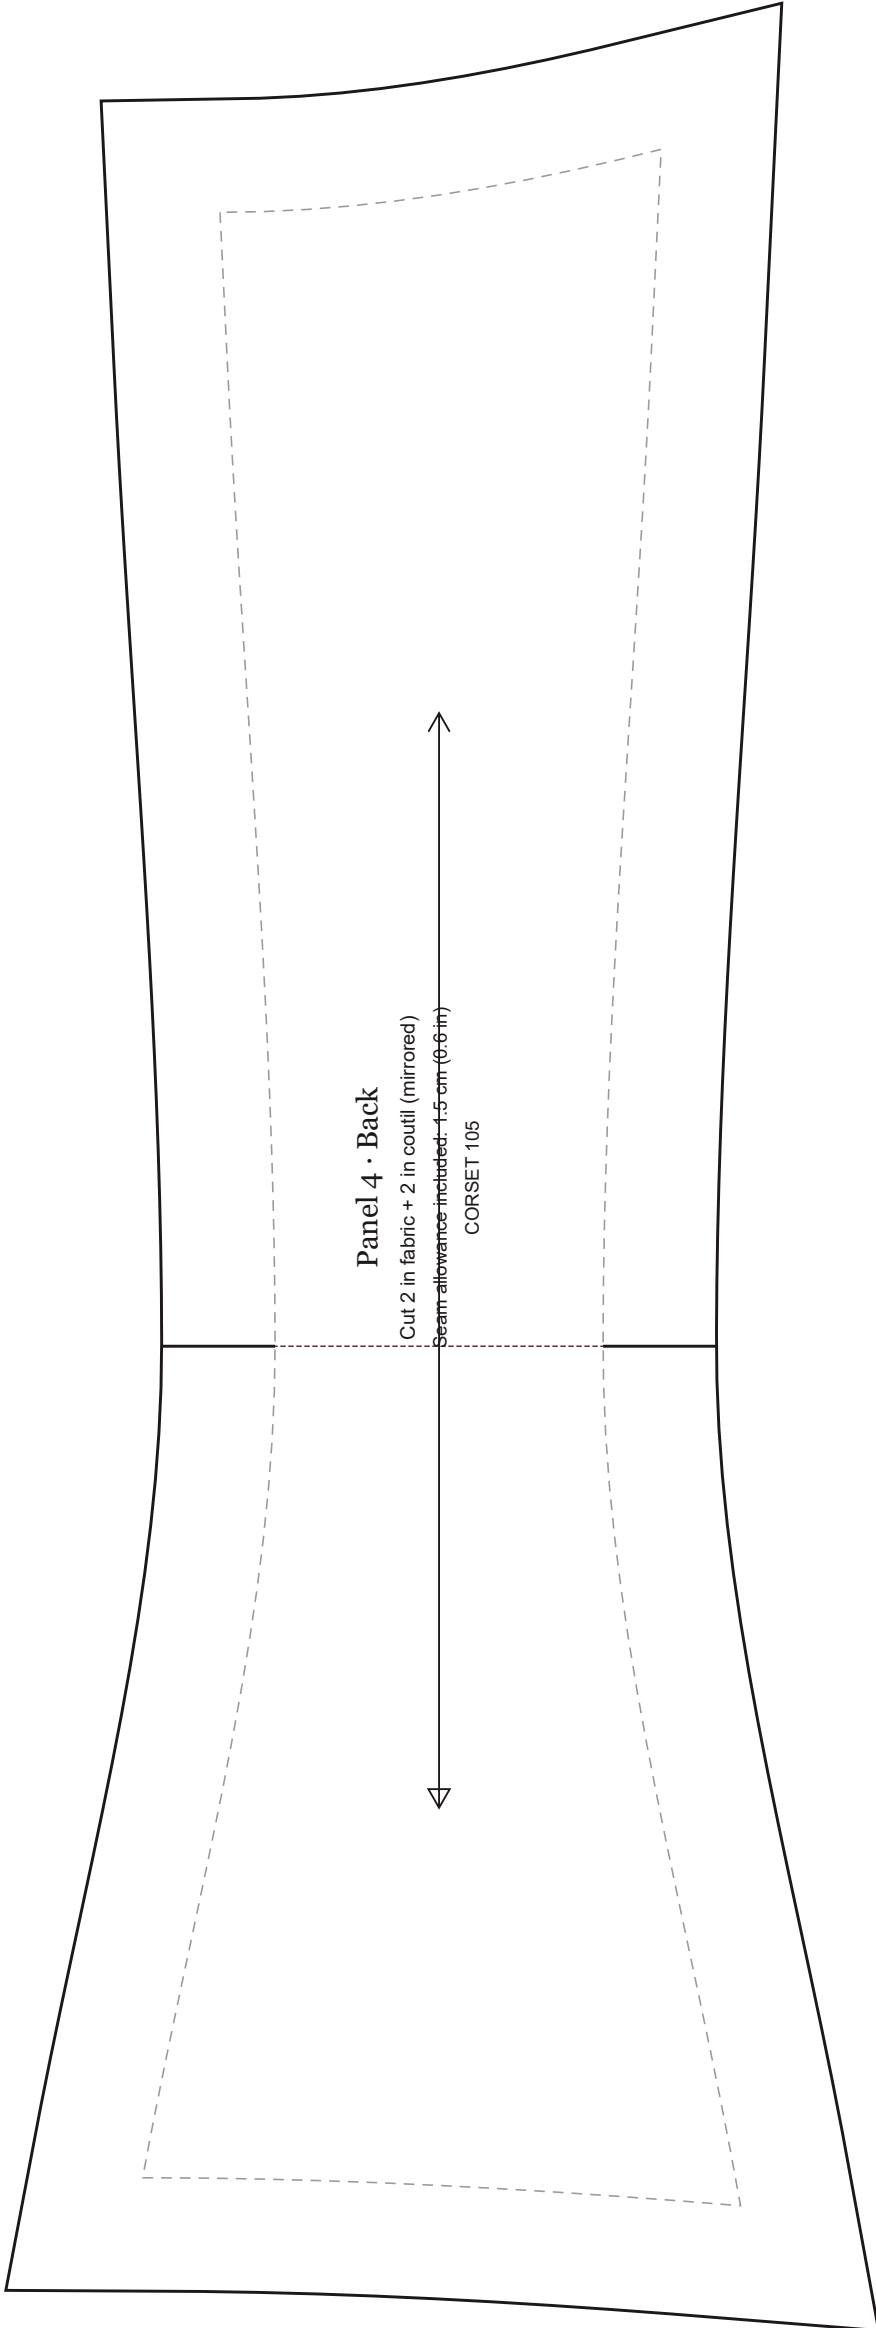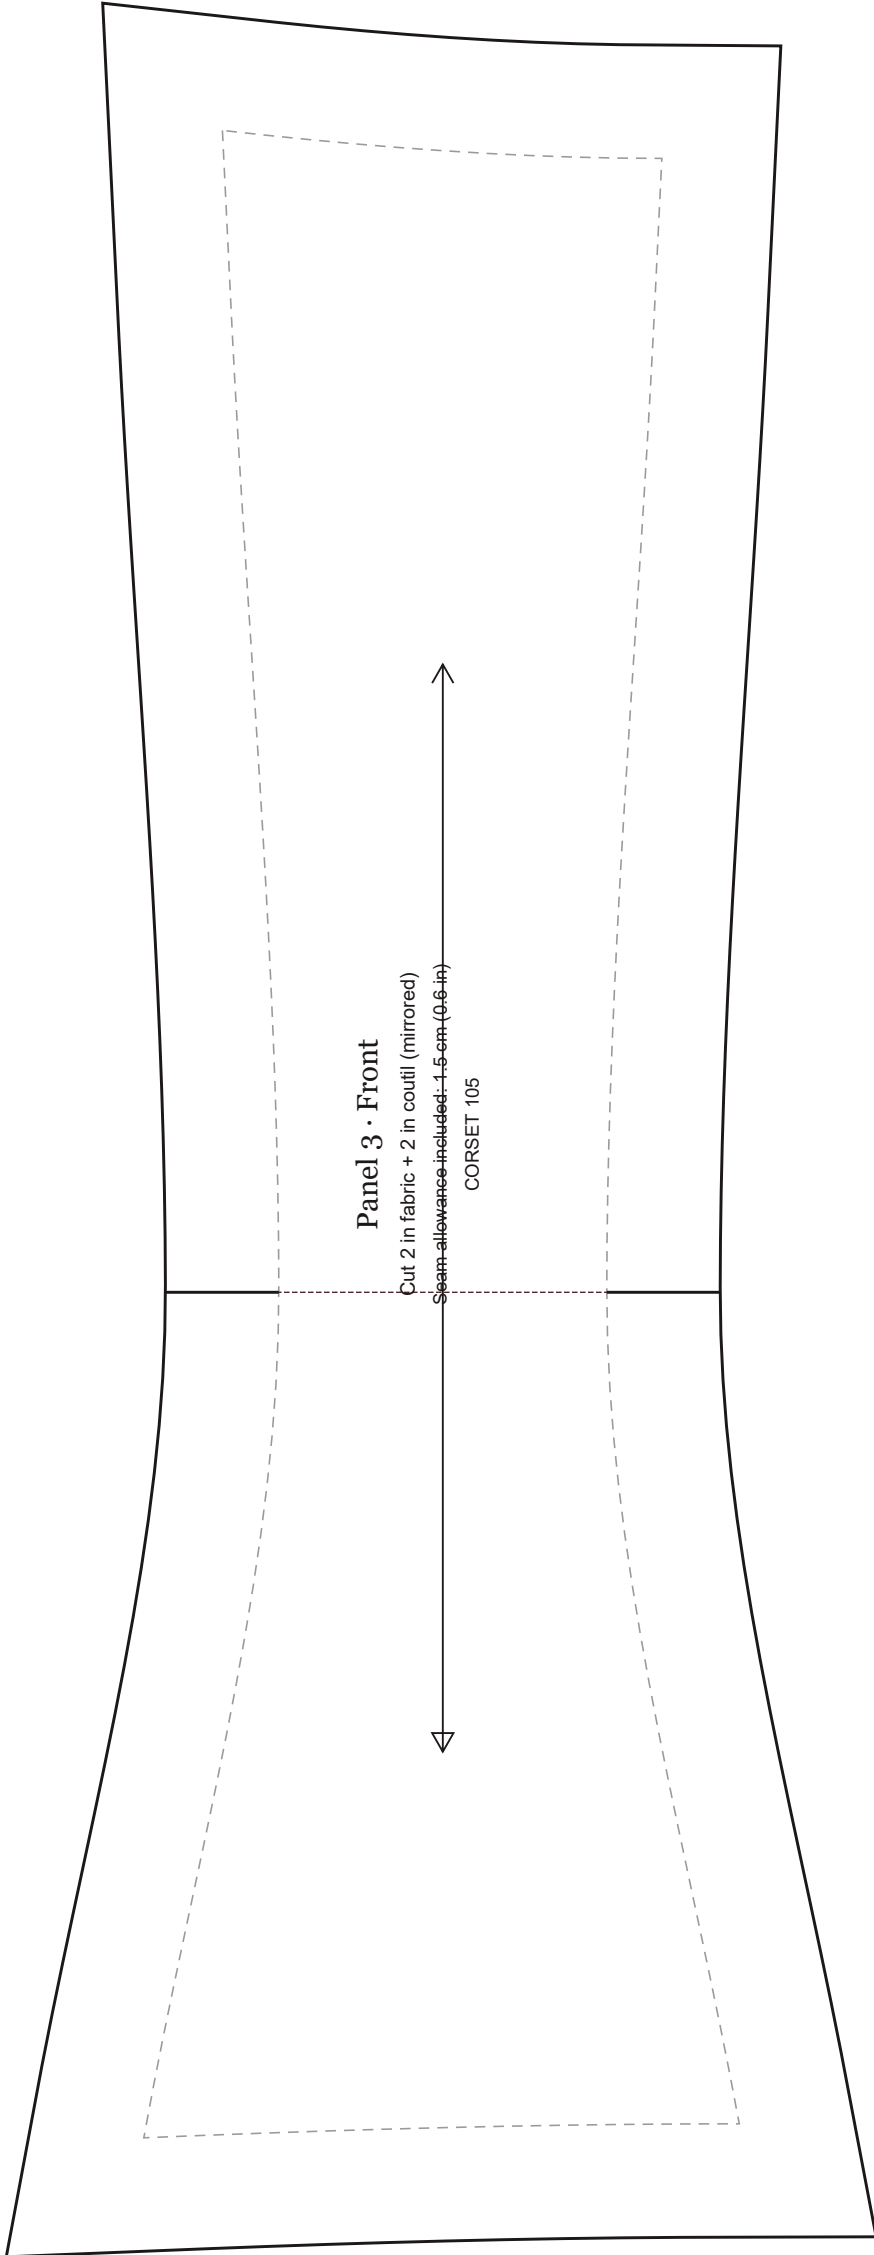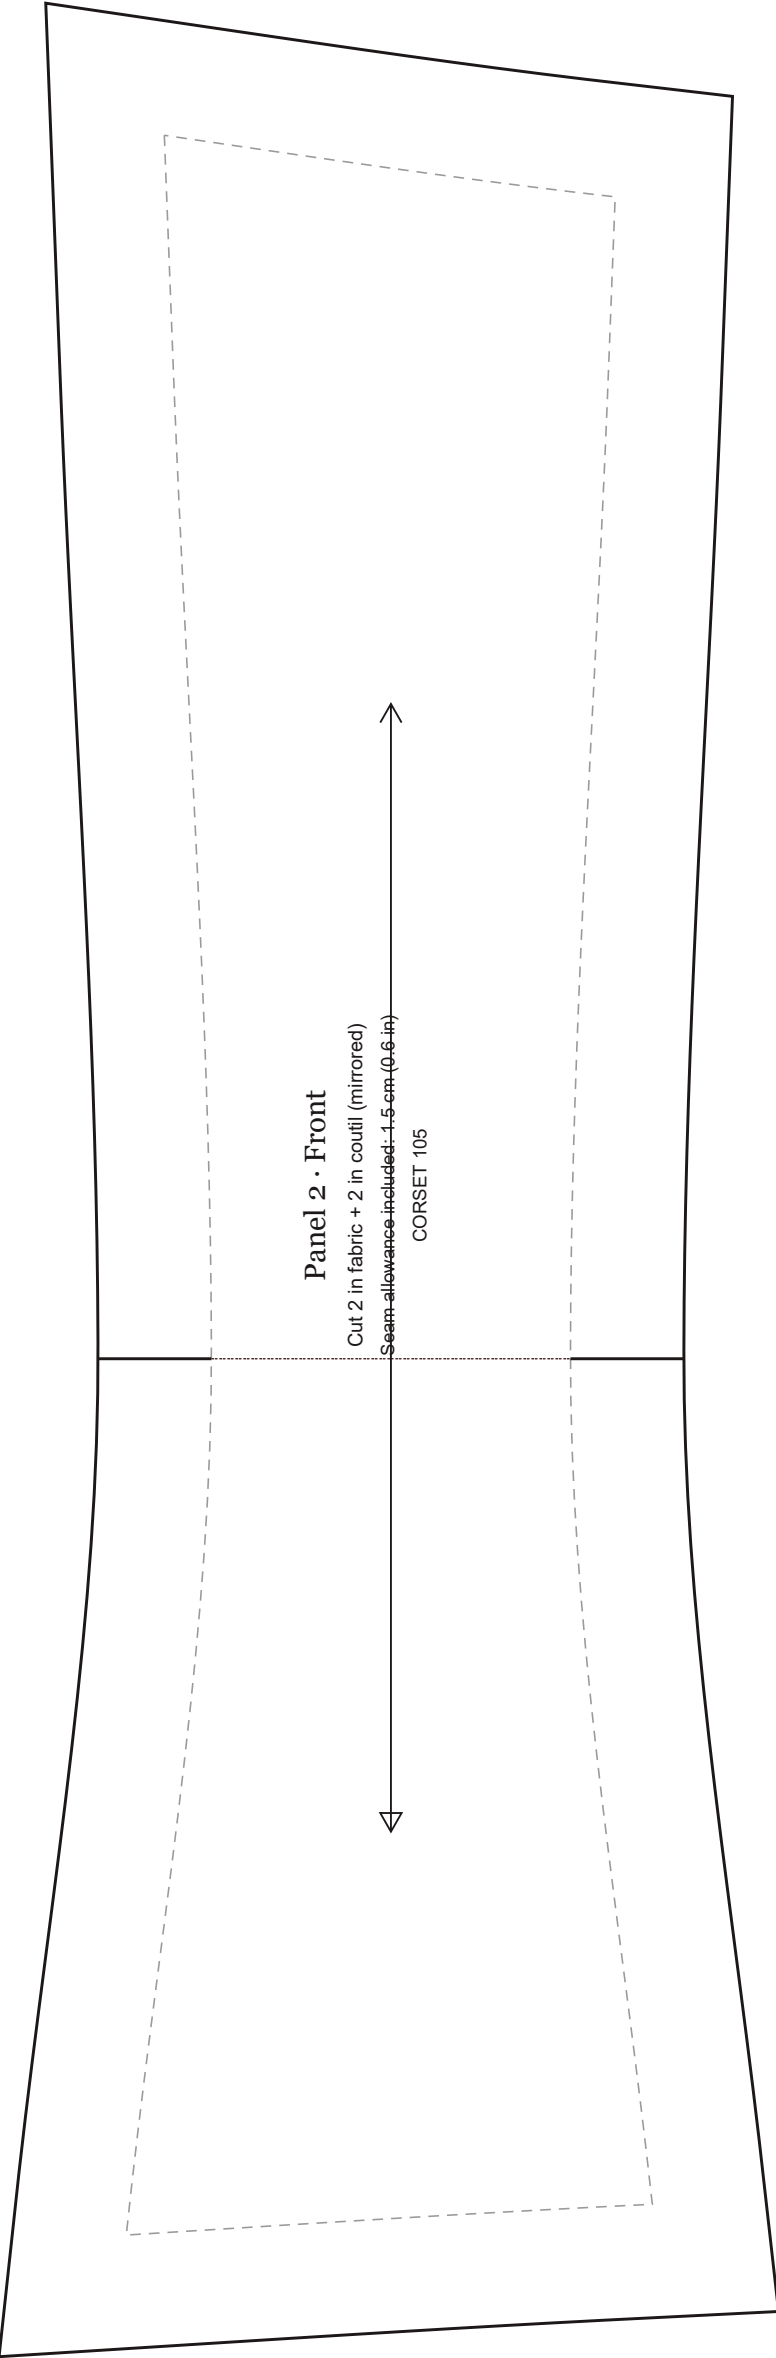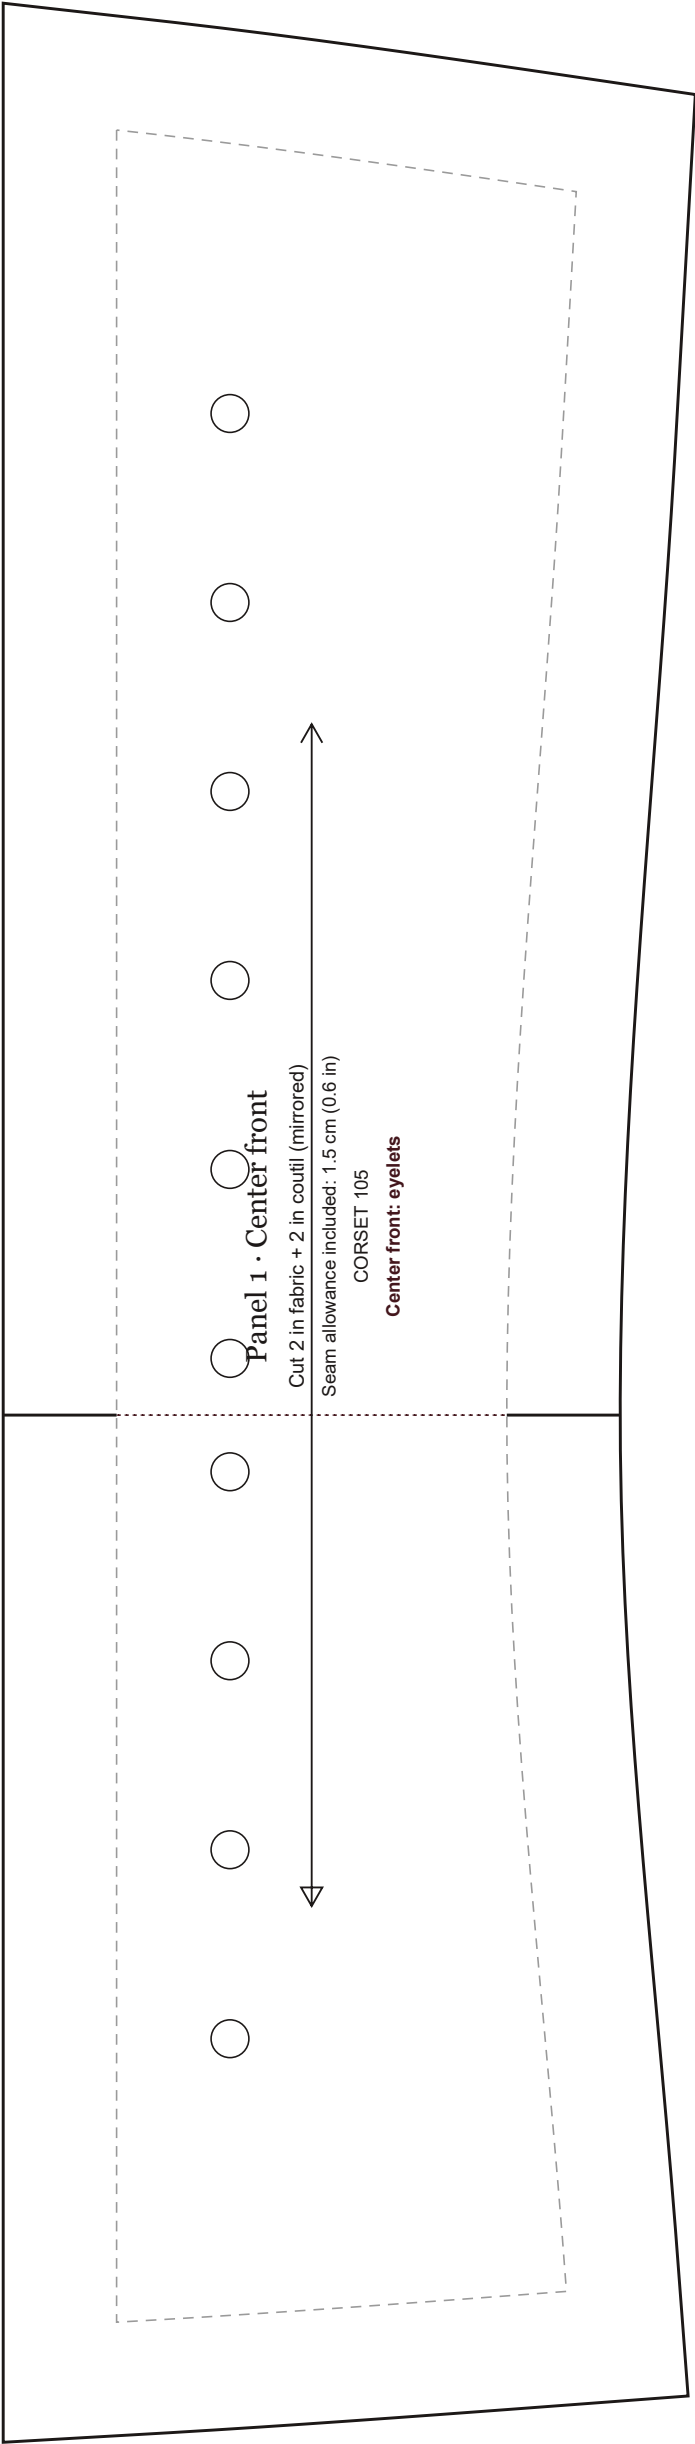

**TEST SQUARE**

It must measure 10 × 10 cm  
(3.94 × 3.94 in). If it does not,  
check you printed at 100 %  
("Actual size", no scaling).

CORSET 105