

Border - Decorative

Bordes - Decoracion

Images may include options. Las imágenes pueden incluir opciones.



1312K6

Automatic Decorative Border Workstation

- Needle spacing:
25 needles, 1/4" gauge to 6"
- Border width adjustable up to 18"
- Synchronized puller produces
pucker-free seam
- Decorative trim width adjustable
- Auto stop for material depletion
- Thread break detectors
- Variable torque re-winder

Estación de Trabajo para Decorar Bordes

- *Distancia entre agujas:
25 agujas, 1/4" calibre 6"*
- *Ancho del Borde hasta 18"*
- *Rodillo de arrastre sincronizado para
producir costuras lisas*
- *Ancho de cinta decorativa ajustable*
- *Se detiene automáticamente al agotarse
el material*
- *Detectores de ruptura de hilos*
- *Rebobinado con torque variable*



1312K6


Technical Information

OPTIONS

- **1312046** - Tension rack Assembly 18"
- **1312029** - Border centering guide
- **1312052** - Adaptor for handle spool
- **1312160** - Border splitter, folder kit
- Stripe guides
- Hemmers
- Tape binders
- Extra rolls holders

MODELS

- **11312K6** - Automatic Decorative Border Workstation
Max Needle distance 6", 2 roll holders, With Kansai BX1425 Sewing Head
- **11312K65R** - Automatic Decorative Border Workstation, Max Needle distance 6", 5 roll holders, With Kansai BX1425 Sewing Head

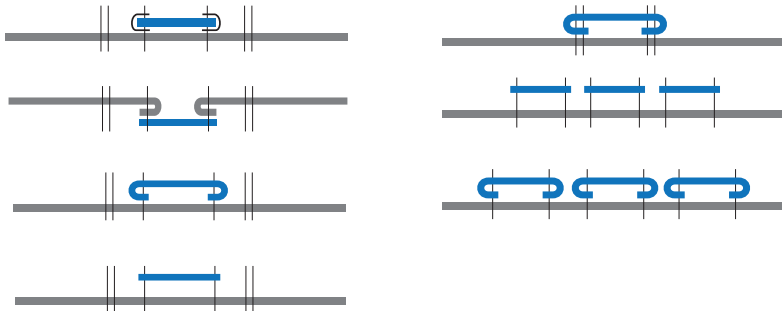

Información Técnica

OPCIONES

- **1312046** - Guía de borde 18"
- **1312029** - Guía de centrado de bordes
- **1312052** - Adaptador para rollos de asas
- **1312160** - Separador de bandas
- Guías de cintas
- Dobladores
- Ribeteadores
- Soportes adicionales de rollos

MODELOS


- **11312K6** - Estación de trabajo automática para bordes decorativos Distancia máxima entre agujas 6", 2 portarrollos, con cabezal de costura Kansai BX1425
- **11312K65R** - Estación de trabajo automática para bordes decorativos Distancia máxima entre agujas 6", 5 portarrollos, con cabezal de costura Kansai BX1425



SPECIFICATIONS / ESPECIFICACIONES	
Max sewing speed (rpm) / Max velocidad de costura (rpm)	2400
Factory preset speed (rpm) / Velocidad de fábrica (rpm)	2000
Max stitch length (spi) / Max longitud de puntada (spi)	6-7
Max needle distance (inch) / Max distancia de aguja (pulgadas)	6
Needle system / Sistema de aguja	SN113
Needle size / Grosor de aguja	18/100
Weight of material / Tipo de material	MEDIUM
Max presser footlift (inch) / Altura máxima del prénsatelas (pulgadas)	3/8
Voltage (v/ph/hz) / Voltaje (v/ph/hz)	220V 1PH 60HZ
Current (amps) / Amperaje (amperios)	5
Motor type / Tipo de motor	DC
Air pressure (psi) / Presión de aire (psi)	80
Air consumption (cfm) / Consumo de aire (cfm)	1
Shipping weight (lbs) / Peso de embarque (lbs)	980
Shipping dimensions (w/l/h, inch) / Dimensiones de embarque (w/l/h, pulgadas)	60 x 48 x 55

PRODUCTION / PRODUCCIÓN

Feet per min. / Pies por minuto.	28'
----------------------------------	-----

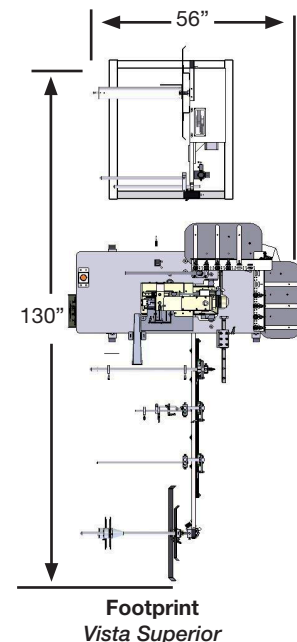

www.atlatt.com • sales@atlatt.com
+1 (770) 963-7369 • FAX +1 (770) 963-7641
 362 Industrial Park Drive • Lawrenceville, GA 30046

PATENTS: Our equipment may be covered by one or more patents. Please go to the following web page for an up-to-date patent list: www.atlatt.com/patents © 2025 Atlanta Attachment Co. 19189021420



Atlanta Attachment Company
Sudden Service®