


Duke®

DY 2010

Programmable Pattern Sewing Machine

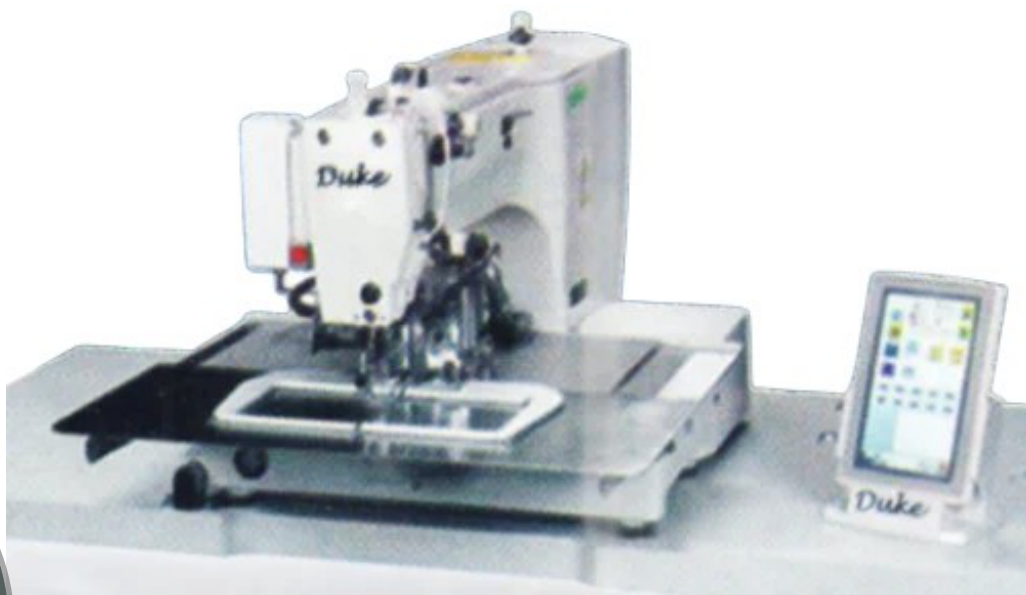

Features:

- Super high speed machine of 2700rpm, thus, increasing the production efficiency. Can be used in almost all the industries, and has a maximum X & Y size of 200 X 100mm.
- Machine uses direct-drive motor technology, and has an immediate start & stop response. Compared with traditional machines, it saves over 19% working time and hence higher efficiency.
- Compatible with the industry's two most common ways to play version, i.e. full play version & function modification.
- Powerful data compatibility greatly reduce the input pattern duplication.

Needle / Needle Hole Guide / Intermediate Presser Corresponding Table

Application	Needle	Needle Hole Guide	Intermediate Pressure
Knit and knitting fabric (option)	#09~#11	φ1.6	φ1.6×φ42.6×5.7×37.0
Light- to medium-weight (S type)	#11~#14 *1	φ1.6	φ2.2×φ43.6×5.7×38.5
Medium- to heavy-weight (H type)	#14~#18 *2	φ2.0	φ2.2×φ43.6×8.7×41.5
Heavy-weight (option)	#18~#25	φ2.4	φ2.7×φ44.1×5.7×38.5
Heavy-weight (slide-type thread take-up lever: standard)		φ3.0	
Extra heavy-weight (option)		φ3.0 (with counterbore)	φ3.5×φ45.5×5.7×38.5
For the prevention of stitch skipping on heavy-weight materials (option)		φ3.0 (with eccentric)	

Duke®



DY 2010



Specification

Max. sewing speed	2700stitch/min
Stitch length	0.1~12 mm
Needle bar stroke	38 mm
Lift/Stroke of the intermediate presser	Lifting amount: 20mm / Stroke: Standard 4mm (0 - 10mm)
Hook	Large hook
Storage of pattern data in the memory	Main-body memory: Max. 500,000 stitches, 999 patterns (max. 50,000 stitches/pattern) External media: Max. 50,000,000 stitches, 999 patterns (max. 50,000 stitches/pattern)
Bobbin thread/Product counter	Up/Down system (0~9,999)
Lubrication	Semi-dry/hook section: minute-quantity lubrication (tank system)
Sewing machine motor	AC servomotor 550W (direct-drive system)
Power requirement/Power consumption	Single-phase, 3-phase 200~240V/450VA