

Duke®

DY 3020 PRO




Direct Drive Programmable Pattern Sewing Machine

Specifications:

Use of sewing machine	Flat-seam floriation sewing machine (2-times hook)
Line	Single-needle flat seam
Highest sewing speed	2.700 rpm
Sewing area (XXY)	(Maximum) 300X200 mm
Needle pitch	0.05-12.7mm
Maximum needle number	(20,000 needles/1 pattern)
Presser foot drive	Pneumatic
Work Clamp Height	(Maximum) 30 mm 2-step presser foot: All-in-one presser foot Raising amount by intermittent presser foot 22 mm
Stroke by intermittent presser foot	0 or 2 4.5 mm or 4.5-10 mm (Factory defaults 3mm)
Hook	Two times of shuttle hooks (Standard shuttle hooks are optional components)
Scavenging device	Standard facility
Tangent device	Standard facility
Data storage way	Flash memory (You can sew pattern with CF card) 3.5inch
Motor	AC servomotor 550W , disk 2HD/1.44MB. 2DD (options)
Weigh	Head about 160 kg, Operating panel: about 0.6 kg. control box: 14.2-16.2 kg (according to different export countries)
Power	Single phase 220V, 3-phase 380V
Air pressure	0.5 Mpa 18 1/min.

Features:

- Exquisite Stitches, reliable floriation sewing.
- Highest sewing speed 2,700rpm (Using the stitch length of 3.5mm).
- Strong frame needle Penetrating Power.
- Low power consumption, Economical & Practical.
- Using big presser foot of two steps descending to Easily Position the textiles.

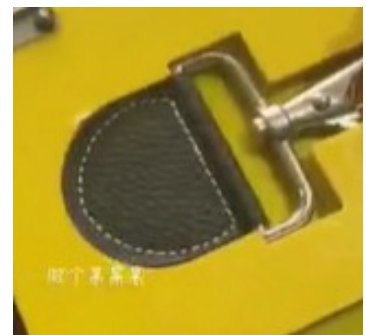

HARI CHAND ANAND & CO.

Corporate Head Office:

A-94/1, Okhla Industrial Area Phase II, New Delhi - 110020

+91-8860086712 , 8584068564

enquiry@groupghca.com