
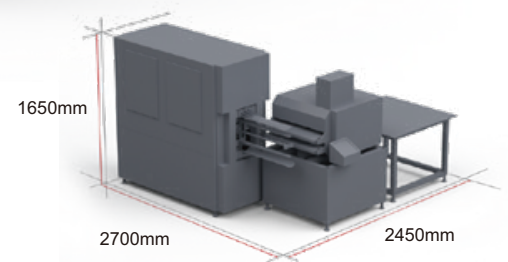


NG-09R

Roll Packing Machine

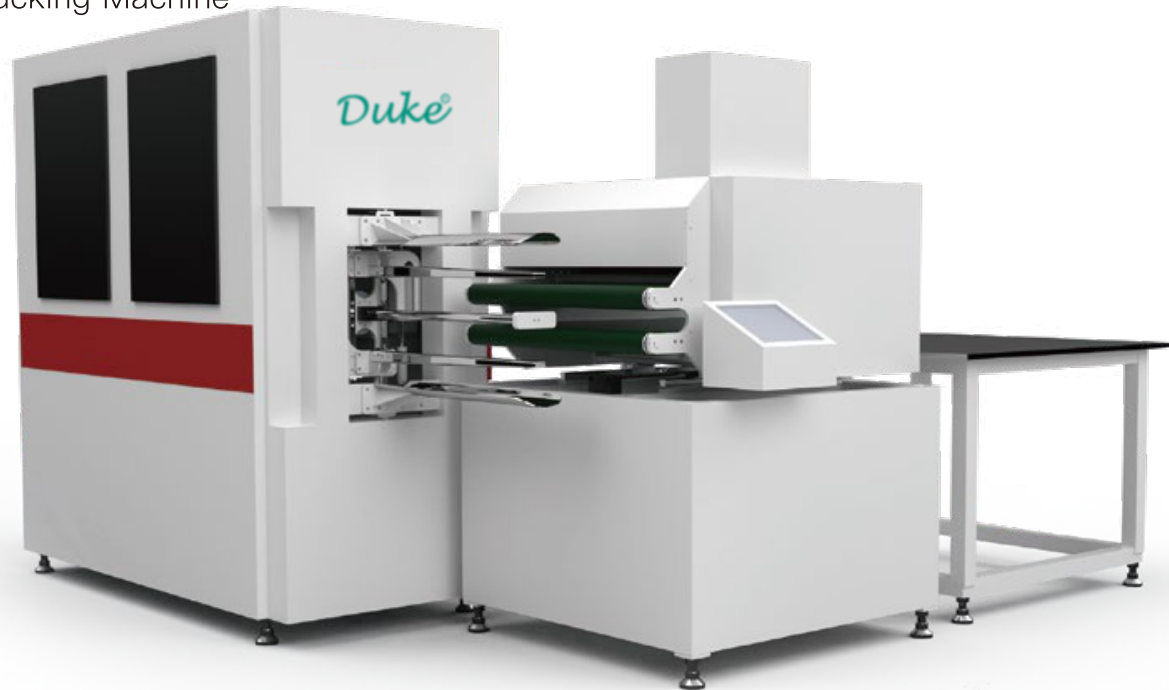

ADVANTAGES

- 1 A workbench is a workplace used to fold the items to be wound into the required width of the product(the maximum width of the items to be wound cannot exceed the working width of the machine. which is generally 53mm, and special sizes can be customized).
- 2 The feeding component consists of two conveyor curtains, one above and the other below, which are synchronously driven by motors to transport the material to be rolled between the rolling components.
- 3 powered by a motor through a sprocket and chain to transmit power to the coi rod fixed on the rotating plate: The coil rod can slide on the guide pillar under the action of the cylinder. When the rolled material passes through the sensor and reaches between the two rolling rods, the rolling rod will slide towards the center of the pushing plate, clamp the rolled material, and the rolling motor will start automatically to roll the material.
- 4 The bagging system consists of a push motor, push rod, push plate, mold baffle, etc. The push plate pushes the wrapped finished product into the packaging bag under the action of the push motor.The size of the roll size is controlled by the upper and lower mold baffles.

TECHNICAL PARAMETER

Voltage	AC380V	Max width	600mm
Efficiency	300 pcs/ hour	Max diameter	400mm
Power	5 kw	Max thickness	3000g /m ²
Rated Current	15A	Coil componesnt limit	80-320 mm
Weight	1000kg	-	-