


NG-11RS


Automatic Cushion Tri-fold Wrapping Machine

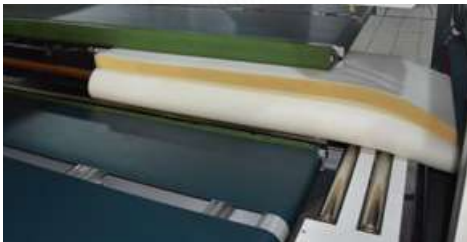

ADVANTAGES

- 1 This machine consists of three machines: automatic centering, automatic folding or triple folding and automatic film pulling and rolling forming
- 2 The PLC, touch screen, frequency converter, remote module, etc used in the machinery are all well-known brands
- 3 Siemens remote control system can be added to facilitate the factory's ability to save production capacity, which can be easily accessed through mobile apps at any time. This facilitates the storage of after-sales data, and cumulative problems and mechanical problems can be directly controlled remotely and handled in a timely manner
- 4 Automatically detect product dimensions, automatically match corresponding backend processes (straight roll, half fold, three fold) based on the detected dimensions, and automatically adjust the diameter of the roll package

MACHINE SIZES

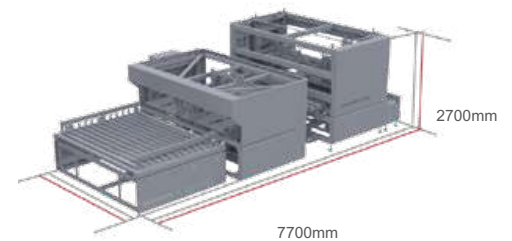

Adjustment diameter
180-500mm

TECHNICAL PARAMETER

Applicable product	Mattresses & Spong	Center table parameters	Width of product less than 2200m
Sponge density	$\geq 25\text{kg/m}^3$, $\leq 45\text{kg/m}^3$		
Efficiency	45S / Sheet		
Maximum mattress size	2200*1500*150MM	Sizes of Foam sheet - Sizes after tri- fold	2200*120mm - 750*390m 1700*40mm - 520*240m
Voltage	380V/50HZ		
Power	26.8 KW		
Weight	About 6.0 Ton	Sizes of Foam sheet - Sizes after fdd	2200*120mm - 1020*280m 1500*40mm - 680*150m