

NG-25M

Full Automatic Foam block compress machine


ADVANTAGES

- 1 The foam block is automatically completed by the conveyor belt from inlet to outlet, and has functions such as automatic vacuum discharge and automatic heat sealing; High production efficiency, short training cycle, easy for production personnel to rotate, anocan connect various packaging production lines, saving labor costs, time and effort for manufacturers, and greatly saving storage, transportation space, and enterprise costs.
- 2 Procurement of Siemens brand control systems and main electrical components.
- 3 Automatic film packaging, automatic belt conveyor mattress without manual labor.
- 4 It can achieve integrated packaging compression.
- 5 The product height can reach 1300mm. Can be Single sheet compression and multi sheet superimposed compression.
- 6 Low mechanical failure rate and low maintenance cost. Almost all machines are shipped with simple installation and operation.



The foam block passes through the entrance and covered with the film from top to bottom. After compression, three heat sealing devices are used to heat seal the film around the sponge into a sealed state

MACHINE SIZES

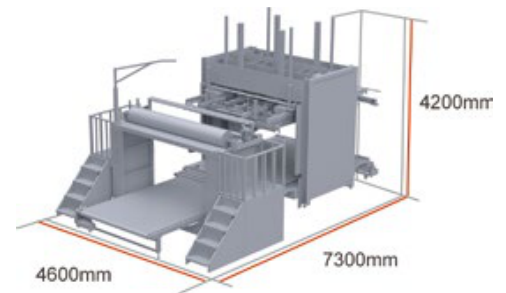

TECHNICAL PARAMETER

Voltage	380V/50Hz	Power	31 kw
Pressure size	3000*2300mm	Over dimesion	7300x4600x4200mm
Max size	2800*2200mm	Weight	8000 kg
Standard Pressure	80T	Pressure plate distance	1100mm

