


NG-25R


Full Automatic Foam block compressor & roll packing machine




MACHINE SIZES

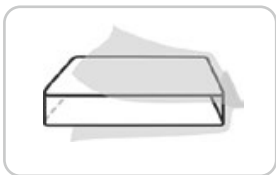


Film Bagging

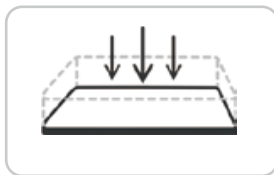

Compressing

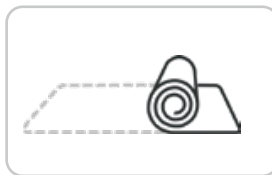

Rolling

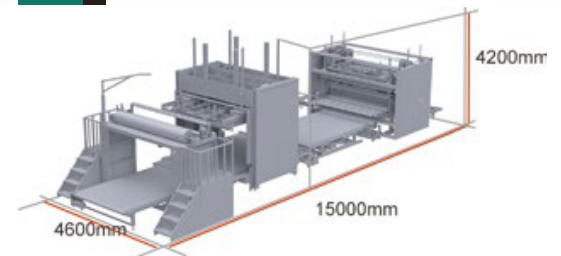

TECHNICAL PARAMETER

Applicable product	suitable for roll compression of foam block	Net weight	(about) 15 tons
Voltage	AC 380V/60HZ	Press down speed	about 70mm/s
Pressure plate size	3000 * 2300MM	Maximum pressure	about 80 tons
Mattress size	2800 * 2200MM (max size)	Efficiency	95~120sec/pcs
Roll diameter	450-800mm	Rolling efficiency	50sec/pcs
Maximum lift	1320MM	Product hardness after compression	≤ 3.0 Kpa
Power	(about) 50KW		250mm
Machine Sizes	14000 * 4600 * 4130MM	The maximum allowable height for the roll package to pass through	

Pressure 80T (standard)



ADVANTAGES

- 1 Integrated fully automatic sponge compression packaging machine, the mattress is automatically completed from inlet to outlet by the conveyor belt, and has Functions such as automatic vacuum discharge and automatic heat sealing; High production efficiency, short training cycle, easy for production personnel to rotate and can connect various packaging production lines, saving labor costs, time and effort for manufacturers, and greatly saving storage, transportation space, and enterprise costs.
- 2 Procurement of Siemens brand control systems and main electrical components.
- 3 Automatic film packaging, automatic belt conveyor mattress without man labor.
- 4 It can achieve the integration of packaging compression and rolling.
- 5 The product height can reach 1300mm, Single sheet compression and multi sheet superimposed compression.
- 6 Low mechanical failure rate and low maintenance cost. Almost all machines are shipped, with simple installation and operation.

