



FK GROUP SPA

Via Friuli, 21
24044 Dalmine (BG) - Italy
Tel. +39 035 565633

Sales Dept.

commercial@fkgroup.com
Tel. +39 035 565633
Fax +39 035 564445

Customer Service

customer.service@fkgroup.com
Tel. +39 035 566647
Fax +39 035 564445



UNI EN ISO 9001:2015 Certified
Quality Management Company

www.fkgroup.com
fkgroup@fkgroup.com




HARI CHAND ANAND & CO.

Corporate Head Office:

A-94/1, Okhla Industrial Area Phase II, New Delhi - 110020

+91-8860086712 , 8584068564

enquiry@grouphca.com

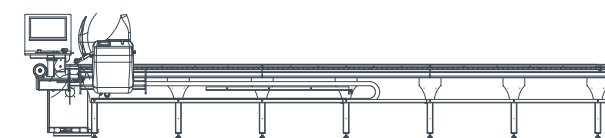

Biliardo Cutting System



Biliardo

Automatic static table cutting system **offering the choice of 2,5-6-8cm cutting heads** for small and medium productions. Guaranteed flexibility and quality, from multiple plies to single ply cutting in a few seconds. Particularly suitable for cutting Technical Textiles and Composites.

Ecopower: intelligent vacuum management for low power consumption.

JUST CUT: the simple and intuitive Software makes all cutting parameters setting fast and safe. Automatic cutting pilot software.

To complete all the characteristics that make **Biliardo** unique, there is the remote technical assistance, also via WEB, that ensures just in time total and constant support to the operator, thus allowing working in complete peace of mind.

The innovative Biliardo is a Static Automatic Cutting Unit with the possibility of using the on board spreading machine class 590.

Working Area (cm)	180 X 320	200 X 320	220 X 320	180 X 420	200 X 420	220 X 420	180 X 520	200 X 520	220 X 520
Biliardo 2,5 Overall dimensions L x W x H (cm)	510 x 265 x 134	510 x 285 x 134	510 x 305 x 134	610 x 265 x 134	610 x 285 x 134	610 x 305 x 134	710 x 265 x 134	710 x 285 x 134	710 x 305 x 134
Biliardo 6-8 Overall dimensions L x W x H (cm)	515 x 280 x 156	515 x 300 x 156	515 x 320 x 156	615 x 280 x 156	615 x 300 x 156	615 x 320 x 156	715 x 280 x 156	715 x 300 x 156	715 x 320 x 156
Weight (Kg)	1470	1540	1610	1870	1950	2030	2270	2360	2450
Installed Power (kW)	12								
Average Consumption (kW)	5,6	5,6	5,6	5,9	5,9	5,9	6,5	6,5	6,5
Power supply Tension	400V±10%								
Max compressed lay height (cm)	2,5-6-8								

With the aim of improving its machinery FKgroup reserve the right to change the technical characteristics without prior notice.

Average power consumption 5.6kW



Industry 4.0
READY



Specifications: dust vacuum filter, polythene bar supports and operator safety light indicator. Single or Double Turbine as per machine dimensions.