



FK GROUP SPA

Via Friuli, 21
24044 Dalmine (BG) - Italy
Tel. +39 035 565633

Sales Dept.

commercial@fkgroup.com
Tel. +39 035 565633
Fax +39 035 564445


Customer Service

customer.service@fkgroup.com
Tel. +39 035 566647
Fax +39 035 564445



UNI EN ISO 9001:2015 Certified
Quality Management Company

www.fkgroup.com
fkgroup@fkgroup.com

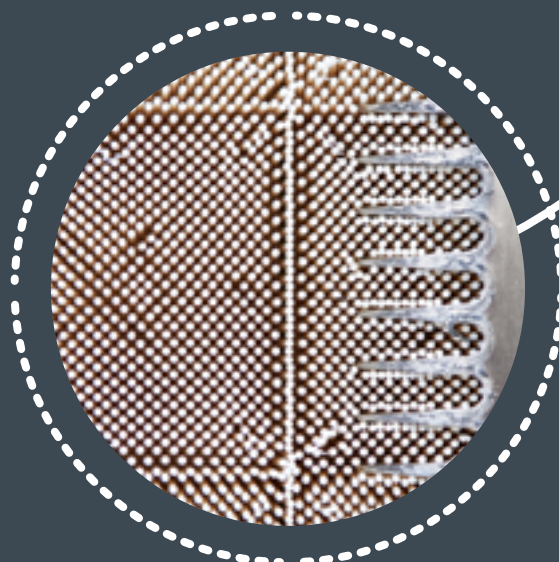


HARI CHAND ANAND & CO.

Corporate Head Office:

A-94/1, Okhla Industrial Area Phase II, New Delhi - 110020

+91-8860086712 , 8584068564

enquiry@grouphca.com

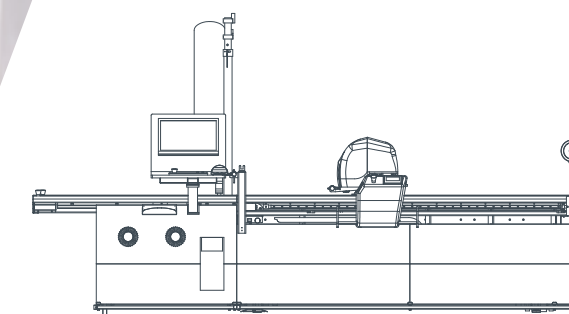

Freccia
Cutting System



Freccia

Ideal solution for small or medium productions. Freccia is the **automatic conveyor cutting system** for mattresses up to 2.5 cm. Its strengths are:

- low energy consumption;
- ease of use;
- reliability.

The innovative **4 kW double turbine system** reduces consumption to 4.9 kW. The system ensures reduced noise thanks to the 2 turbines with reduced frequency revolutions. The double impeller allows for **more efficient suction**.

The **Just Cut control software** allows to set and modify the cutting parameters in a fast, intuitive and safe way.

The **technical assistance** service, by telephone or via the web, allows the operator to work in complete peace of mind. Like having a specialized technician at your side who supports you for any doubt or inconvenience at all time.

The QRV (Quick Release Valve) system allows lightning-fast advances of the cutting belt, drastically reducing production times, especially in the presence of long set-ups.

The machine is equipped with Fanuc electronics. It is available in **3 versions** to suit all work needs.

- Standard 4kW double turbine (total length of the machine 4.80mt);
- Upgrade with 5.5kW double turbine (total machine length 4.80mt);
- Short with single 11kW turbine (length 3.67mt).

OPTIONAL

Freccia boasts various optional solutions that allow it to meet particular technical needs and respond to sector certifications:

- LG 32" 16:9 Ultra HD 4K Design Ultra Slim Monitor;
- **ISO 5011 certification** on air quality;
- **TÜV certification** of MEP systems on reduced consumption;
- **Tool Iso** - Manipulator of ISO file "Tool" modifies placements (position of figures, notches, holes).



Average energy consumption starting from 4,9kW



Industry 4.0
REAdy

N° 2 TURBINES OF 4 kW OR 5.5 kW

Working Area (cm)	180 x 180	200 x 180	220 x 180
Overall dimensions L x W x H (cm)	480 x 284 x 214	480 x 304 x 214	480 x 324 x 214
Weight (Kg)	2300	2450	2750
Installed Power (kW)		14	
Average Consumption (kW)	4,9	4,9	6
Power supply Tension		400V±10%	
Max compressed lay height (cm)		2,5	

N° 1 11 unloading table without overhang)

Working Area (cm)	180 x 180	200 x 180	220 x 180
Overall dimensions L x W x H (cm)	367 x 284 x 214	367 x 304 x 214	367 x 324 x 214
Weight (Kg)	2200	2350	2650
Installed Power (kW)		14	
Average Consumption (kW)	4,9	4,9	6
Power supply Tension		400V±10%	
Max compressed lay height (cm)		2,5	

With the aim of improving its machinery FKgroup reserve the right to change the technical characteristics without prior notice.

kW TURBINE (



Single or double drilling device with temperature control.

