



FK GROUP SPA

Via Friuli, 21
24044 Dalmine (BG) - Italy
Tel. +39 035 565633

Sales Dept.

commercial@fkgroup.com
Tel. +39 035 565633
Fax +39 035 564445

Customer Service

customer.service@fkgroup.com
Tel. +39 035 566647
Fax +39 035 564445



UNI EN ISO 9001:2015 Certified
Quality Management Company

www.fkgroup.com
fkgroup@fkgroup.com




HARI CHAND ANAND & CO.

Corporate Head Office:

A-94/1, Okhla Industrial Area Phase II, New Delhi - 110020

+91-8860086712 , 8584068564

enquiry@grouphca.com

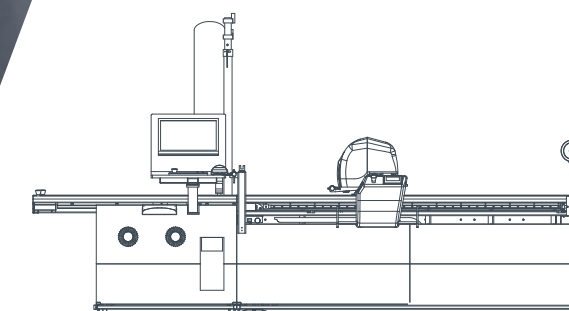

Tecno Freccia
Cutting System



- versatile;
- fast and accurate;
- efficient.

The system is also specifically designed for cutting: PVC, glass fiber, carbon fiber, protective fibers from medical rays, laminated fabrics, foam, wadding, rubber, insulation for walls and pipes, polyurethane, nylon and kevlar. Perfect for **industrial sectors** such as construction, automotive, nautical, aeronautics, furniture, defense or protective clothing.

The machine is equipped with the Non Stop Cutting System that allows you to **manage the cutting as it advances**(Continuous Cutting software) or to **work with consistent mattresses**(Quick Release Vacuum).

The machine is equipped with Fanuc or Siemens electronics. It is available in several versions to suit all work needs adapt to all work needs.

- Standard 4kW double turbine (total length of the machine 4.80mt);
- Upgrade with double 5.5 kW turbine (total machine length 4.80mt);
- Short with single 11 kW turbine (3.67 m length).

Depending on the needs Tecno Freccia can be completed with various options that allow greater control of work, speed and complex processes:

- LG 32" 16:9 Ultra HD 4K Design Ultra Slim monitor;
- Writing marker with pen adapter instead of the drill;
- Panel and switchboard live positioning system: support, double optics 200x340, das4cut software nesting.

Average energy consumption starting from 4,9kW

[illegible]

Working Area (cm)	180 x 180	200 x 180	220 x 180
Overall dimensions L x W x H (cm)	367 x 284 x 214	367 x 304 x 214	367 x 324 x 214
Weight (Kg)	2200	2350	2650
Installed Power (kW)		14	
Average Consumption (kW)	4,9	4,9	6
Power supply Tension		400V±10%	
Max compressed lay height (cm)		2,5	

kW TURBINE (

