

This specification covers the supply and erection of structural steelwork. All steel shall conform to IS 2062 E250 unless noted otherwise on the drawings. Bolted connections shall use property class 8.8 bolts to IS 1367. Welding shall be carried out by qualified welders in accordance with IS 816. The contractor shall submit fabrication drawings for approval before work begins. Surface preparation shall achieve SA 2.5 before the application of primer. This specification covers the supply and erection of structural steelwork. All steel shall conform to IS 2062 E250 unless noted otherwise on the drawings. Bolted connections shall use property class 8.8 bolts to IS 1367. Welding shall be carried out by qualified welders in accordance with IS 816. The contractor shall submit fabrication drawings for approval before work begins. Surface preparation shall achieve SA 2.5 before the application of primer. This specification covers the supply and erection of structural steelwork. All steel shall conform to IS 2062 E250 unless noted otherwise on the drawings. Bolted connections shall use property class 8.8 bolts to IS 1367. Welding shall be carried out by qualified welders in accordance with IS 816. The contractor shall submit fabrication drawings for approval before work begins. Surface preparation shall achieve SA 2.5 before the application of primer.

BEAM AND COLUMN SCHEDULE

Mark	Section	Grade	Length	Qty	Mass
B-14	ISMB 300	Fe 415	6000	12	2844
B-15	ISMB 400	Fe 415	7500	8	3912
C-01	ISMC 200	Fe 410	3600	24	1670
C-02	ISMC 250	Fe 410	3600	16	1420
A-01	ISA 75x75	Fe 410	2400	40	528
T-01	ISWB 350	Fe 415	9000	4	2610

DRAWING NO: S-104

REV: C

SCALE 1:100


ROOF FRAMING PLAN

B-14 ISMB 300 SPAN 6000

B-15 ISMB 400 SPAN 7500

ALL DIMENSIONS IN MM

BOLTS: M20x60 GRADE 8.8

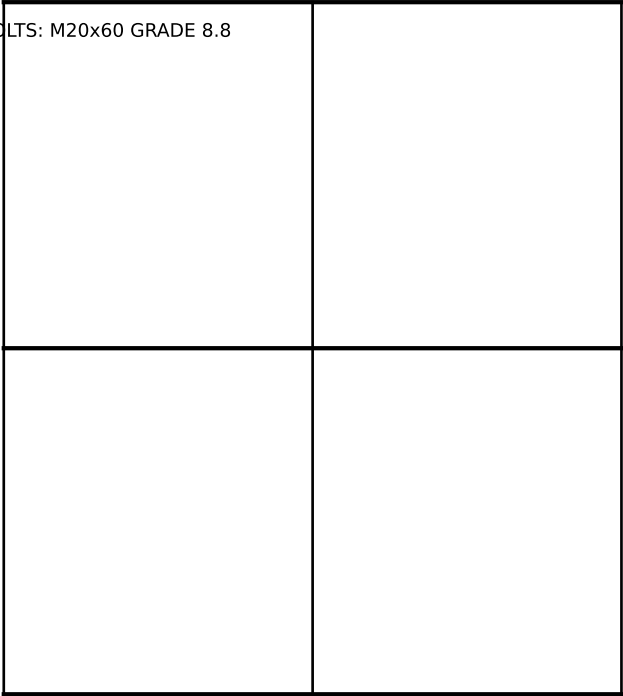

6000



DRAWING NO: S-104

REV: C

SCALE 1:100


ROOF FRAMING PLAN

B-14 ISMB 300 SPAN 6000

B-15 ISMB 400 SPAN 7500

ALL DIMENSIONS IN MM

BOLTS: M20x60 GRADE 8.8

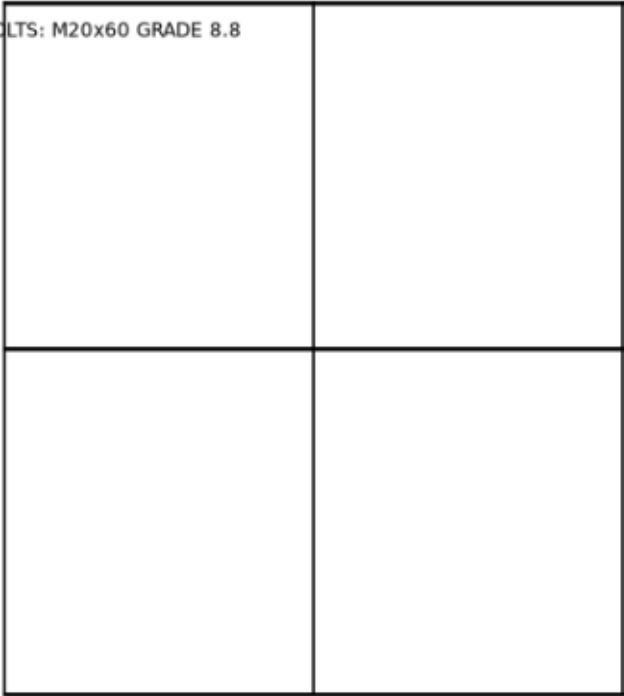

6000



DRAWING NO: S-207

REV: A SCALE 1:50

BASE PLATE DETAIL

PLATE 400x400x20 Fe 410

4 NOS M24 ANCHOR BOLTS

NOTES ON BASE PLATE ERECTION

This specification covers the supply and erection of structural steelwork. All steel shall conform to IS 2062 E250 unless noted otherwise on the drawings. Bolted connections shall use property class 8.8 bolts to IS 1367. Welding shall be carried out by qualified welders in accordance with IS 816. The contractor shall submit fabrication drawings for approval before work begins. Surface preparation shall achieve SA 2.5 before the application of primer. This specification covers the supply and erection of structural steelwork. All steel shall conform to IS 2062 E250 unless noted otherwise on the drawings. Bolted connections shall use property class 8.8 bolts to IS 1367. Welding shall be carried out by qualified welders in accordance with IS 816. The contractor shall submit fabrication drawings for approval before work begins. Surface preparation shall achieve SA 2.5 before the application of primer.