7. MIPS Basic Instructions Checklist

Operation	Opcode in MIPS	Meaning
Addition	`add $rd, $rs, $rt`	`$rd = $rs + $rt`
	`addi $rt, $rs, C16`$_{2s}$	`$rt = $rs + C16`$_{2s}$
Subtraction	`sub $rd, $rs, $rt`	`$rd = $rs - $rt`
Shift left logical	`sll $rd, $rt, C5`	`$rd = $rt << C5`
Shift right logical	`srl $rd, $rt, C5`	`$rd = $rt >> C5`
AND bitwise	`and $rd, $rs, $rt`	`$rd = $rs & $rt`
	`andi $rt, $rs, C16`	`$rt = $rs & C16`
OR bitwise	`or $rd, $rs, $rt`	`$rd = $rs | $rt`
	`ori $rt, $rs, C16`	`$rt = $rs | C16`
NOR bitwise	`nor $rd, $rs, $rt`	`$rd = $rs ↓ $rt`
XOR bitwise	`xor $rd, $rs, $rt`	`$rd = $rs ^ $rt`
	`xori $rt, $rs, C16`	`$rt = $rs ^ C16`

`C5` is [0 to 2^5-1] `C16`$_{2s}$ is [-2^{15} to 2^{15}-1] `C16` is a 16-bit pattern

3.1 Storage Architecture: Common Design

- **Stack architecture:**
  - Operands are implicitly on top of the stack.
- **Accumulator architecture:**
  - One operand is implicitly in the accumulator (a special register). Examples: IBM 701, DEC PDP-8.
- **General-purpose register architecture:**
  - Only explicit operands.
  - **Register-memory architecture** (one operand in memory). Examples: Motorola 68000, Intel 80386.
  - **Register-register (or load-store) architecture.**
    Examples: MIPS, DEC Alpha.
- **Memory-memory architecture:**
  - All operands in memory. Example: DEC VAX.

3.2 Memory Content: Endianness

- **Endianness:**
  - The relative ordering of the bytes in a multiple-byte word stored in memory

Big-endian:	Little-endian:
Most significant byte stored in lowest address. **Example:** IBM 360/370, Motorola 68000, ***MIPS*** (Silicon Graphics), SPARC.	Least significant byte stored in lowest address. **Example:** Intel 80x86, DEC VAX, DEC Alpha.
Example: **0xDE AD BE EF** Stored as: 0 **DE** 1 **AD** 2 **BE** 3 **EF**	Example: **0xDE AD BE EF** Stored as: 0 **EF** 1 **BE** 2 **AD** 3 **DE**

NOTE:
The endian-ness of MIPS is actually implementation specific.

J FORMAT

- **Summary:** Given a **Jump** instruction

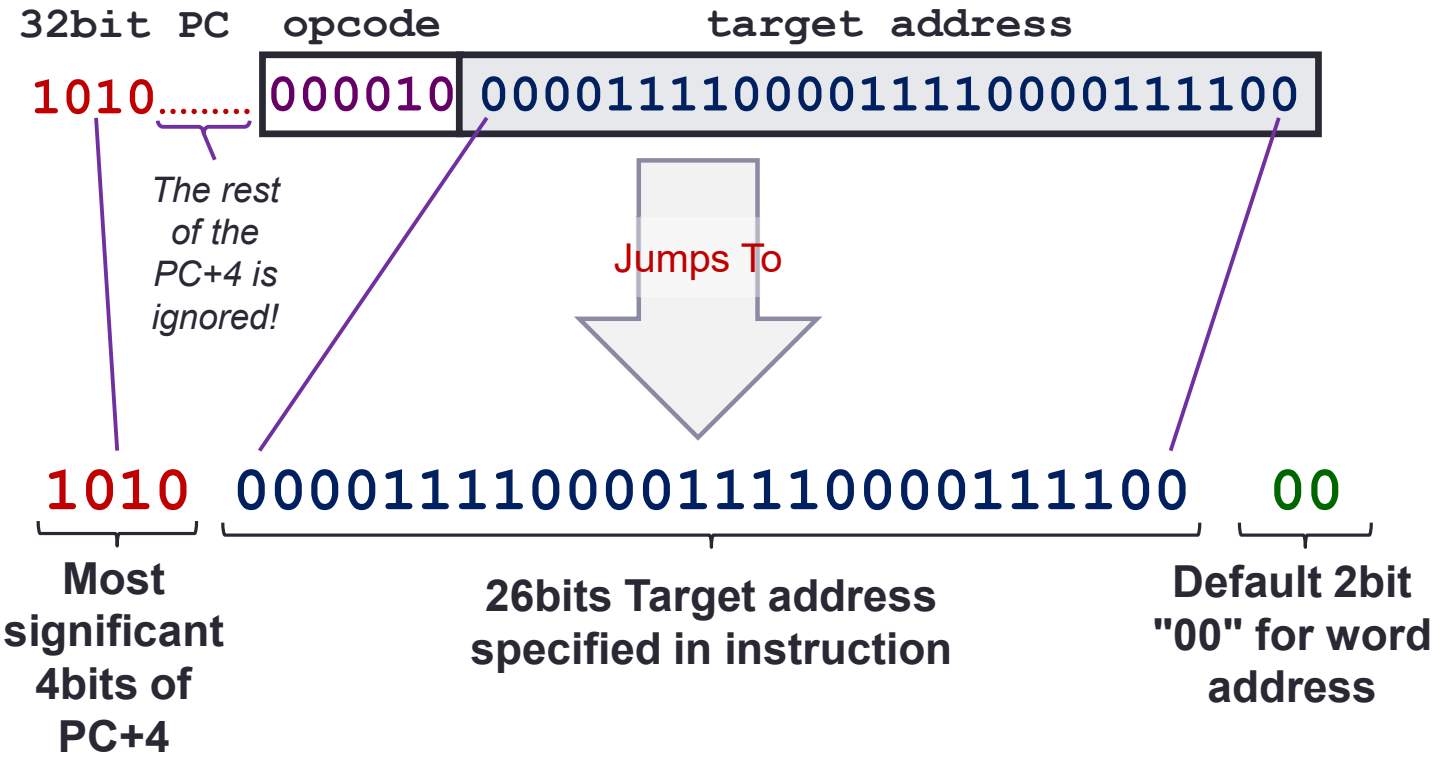

MIPS Instruction Execution Example

	`add $rd, $rs, $rt`	`lw $rt, ofst($rs)`	`beq $rs, $rt, ofst`
Fetch	***standard***	***standard***	***standard***
Decode **Operand Fetch**	○ Read [**$rs**] as *opr1* ○ Read [**$rt**] as *opr2*	○ Read [**$rs**] as *opr1* ○ Use ***ofst*** as *opr2*	○ Read [**$rs**] as *opr1* ○ Read [**$rt**] as *opr2*
ALU	*Result* = *opr1* + *opr2*	*MemAddr* = *opr1* + *opr2*	*Taken* = (*opr1* == *opr2*)? *Target* = (**PC**+4) + **ofst**×**4**
Memory Access		Use *MemAddr* to read from memory	
Result Write	*Result* stored in **$rd**	*Memory* data stored in **$rt**	if (*Taken*) **PC** = *Target*

MIPS Reference Data

CORE INSTRUCTION SET

NAME, MNEMONIC		FORMAT	OPERATION (in Verilog)		OPCODE / FUNCT (Hex)
Add	add	R	R[rd] = R[rs] + R[rt]	(1)	0 / 20_{hex}
Add Immediate	addi	I	R[rt] = R[rs] + SignExtImm	(1,2)	8_{hex}
Add Imm. Unsigned	addiu	I	R[rt] = R[rs] + SignExtImm	(2)	9_{hex}
Add Unsigned	addu	R	R[rd] = R[rs] + R[rt]		0 / 21_{hex}
And	and	R	R[rd] = R[rs] & R[rt]		0 / 24_{hex}
And Immediate	andi	I	R[rt] = R[rs] & ZeroExtImm	(3)	c_{hex}
Branch On Equal	beq	I	if(R[rs]==R[rt]) PC=PC+4+BranchAddr	(4)	4_{hex}
Branch On Not Equal	bne	I	if(R[rs]!=R[rt]) PC=PC+4+BranchAddr	(4)	5_{hex}
Jump	j	J	PC=JumpAddr	(5)	2_{hex}
Jump And Link	jal	J	R[31]=PC+8;PC=JumpAddr	(5)	3_{hex}
Jump Register	jr	R	PC=R[rs]		0 / 08_{hex}
Load Byte Unsigned	lbu	I	R[rt]={24'b0,M[R[rs]+SignExtImm](7:0)}	(2)	24_{hex}
Load Halfword Unsigned	lhu	I	R[rt]={16'b0,M[R[rs]+SignExtImm](15:0)}	(2)	25_{hex}
Load Linked	ll	I	R[rt] = M[R[rs]+SignExtImm]	(2,7)	30_{hex}
Load Upper Imm.	lui	I	R[rt] = {imm, 16'b0}		f_{hex}
Load Word	lw	I	R[rt] = M[R[rs]+SignExtImm]	(2)	23_{hex}
Nor	nor	R	R[rd] = ~ (R[rs] | R[rt])		0 / 27_{hex}
Or	or	R	R[rd] = R[rs] | R[rt]		0 / 25_{hex}
Or Immediate	ori	I	R[rt] = R[rs] | ZeroExtImm	(3)	d_{hex}
Set Less Than	slt	R	R[rd] = (R[rs] < R[rt]) ? 1 : 0		0 / $2a_{hex}$
Set Less Than Imm.	slti	I	R[rt] = (R[rs] < SignExtImm)? 1 : 0	(2)	a_{hex}
Set Less Than Imm. Unsigned	sltiu	I	R[rt] = (R[rs] < SignExtImm) ? 1 : 0	(2,6)	b_{hex}
Set Less Than Unsig.	sltu	R	R[rd] = (R[rs] < R[rt]) ? 1 : 0	(6)	0 / $2b_{hex}$
Shift Left Logical	sll	R	R[rd] = R[rt] << shamt		0 / 00_{hex}
Shift Right Logical	srl	R	R[rd] = R[rt] >> shamt		0 / 02_{hex}
Store Byte	sb	I	M[R[rs]+SignExtImm](7:0) = R[rt](7:0)	(2)	28_{hex}
Store Conditional	sc	I	M[R[rs]+SignExtImm] = R[rt]; R[rt] = (*atomic*) ? 1 : 0	(2,7)	38_{hex}
Store Halfword	sh	I	M[R[rs]+SignExtImm](15:0) = R[rt](15:0)	(2)	29_{hex}
Store Word	sw	I	M[R[rs]+SignExtImm] = R[rt]	(2)	$2b_{hex}$
Subtract	sub	R	R[rd] = R[rs] - R[rt]	(1)	0 / 22_{hex}
Subtract Unsigned	subu	R	R[rd] = R[rs] - R[rt]		0 / 23_{hex}

(1) May cause overflow exception
(2) SignExtImm = { 16{immediate[15]}, immediate }
(3) ZeroExtImm = { 16{1b'0}, immediate }
(4) BranchAddr = { 14{immediate[15]}, immediate, 2'b0 }
(5) JumpAddr = { PC+4[31:28], address, 2'b0 }
(6) Operands considered unsigned numbers (vs. 2's comp.)
(7) Atomic test&set pair; R[rt] = 1 if pair atomic, 0 if not atomic

BASIC INSTRUCTION FORMATS

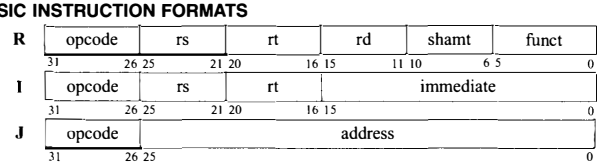

ARITHMETIC CORE INSTRUCTION SET

NAME, MNEMONIC		FORMAT	OPERATION		OPCODE / FMT /FT / FUNCT (Hex)
Branch On FP True	bc1t	FI	if(FPcond)PC=PC+4+BranchAddr	(4)	11/8/1/--
Branch On FP False	bc1f	FI	if(!FPcond)PC=PC+4+BranchAddr	(4)	11/8/0/--
Divide	div	R	Lo=R[rs]/R[rt]; Hi=R[rs]%R[rt]		0/--/--/1a
Divide Unsigned	divu	R	Lo=R[rs]/R[rt]; Hi=R[rs]%R[rt]	(6)	0/--/--/1b
FP Add Single	add.s	FR	F[fd]= F[fs] + F[ft]		11/10/--/0
FP Add Double	add.d	FR	{F[fd],F[fd+1]} = {F[fs],F[fs+1]} + {F[ft],F[ft+1]}		11/11/--/0
FP Compare Single	c.x.s*	FR	FPcond = (F[fs] *op* F[ft]) ? 1 : 0		11/10/--/*y*
FP Compare Double	c.x.d*	FR	FPcond = ({F[fs],F[fs+1]} *op* {F[ft],F[ft+1]}) ? 1 : 0		11/11/--/*y*
* (*x* is eq, lt, or le) (*op* is ==, <, or <=) (*y* is 32, 3c, or 3e)					
FP Divide Single	div.s	FR	F[fd] = F[fs] / F[ft]		11/10/--/3
FP Divide Double	div.d	FR	{F[fd],F[fd+1]} = {F[fs],F[fs+1]} / {F[ft],F[ft+1]}		11/11/--/3
FP Multiply Single	mul.s	FR	F[fd] = F[fs] * F[ft]		11/10/--/2
FP Multiply Double	mul.d	FR	{F[fd],F[fd+1]} = {F[fs],F[fs+1]} * {F[ft],F[ft+1]}		11/11/--/2
FP Subtract Single	sub.s	FR	F[fd]=F[fs] - F[ft]		11/10/--/1
FP Subtract Double	sub.d	FR	{F[fd],F[fd+1]} = {F[fs],F[fs+1]} - {F[ft],F[ft+1]}		11/11/--/1
Load FP Single	lwc1	I	F[rt]=M[R[rs]+SignExtImm]	(2)	31/--/--/--
Load FP Double	ldc1	I	F[rt]=M[R[rs]+SignExtImm]; F[rt+1]=M[R[rs]+SignExtImm+4]	(2)	35/--/--/--
Move From Hi	mfhi	R	R[rd] = Hi		0 /--/--/10
Move From Lo	mflo	R	R[rd] = Lo		0 /--/--/12
Move From Control	mfc0	R	R[rd] = CR[rs]		10 /0/--/0
Multiply	mult	R	{Hi,Lo} = R[rs] * R[rt]		0/--/--/18
Multiply Unsigned	multu	R	{Hi,Lo} = R[rs] * R[rt]	(6)	0/--/--/19
Shift Right Arith.	sra	R	R[rd] = R[rt] >>> shamt		0/--/--/3
Store FP Single	swc1	I	M[R[rs]+SignExtImm] = F[rt]	(2)	39/--/--/--
Store FP Double	sdc1	I	M[R[rs]+SignExtImm] = F[rt]; M[R[rs]+SignExtImm+4] = F[rt+1]	(2)	3d/--/--/--

FLOATING-POINT INSTRUCTION FORMATS



PSEUDOINSTRUCTION SET

NAME	MNEMONIC	OPERATION
Branch Less Than	blt	if(R[rs]<R[rt]) PC = Label
Branch Greater Than	bgt	if(R[rs]>R[rt]) PC = Label
Branch Less Than or Equal	ble	if(R[rs]<=R[rt]) PC = Label
Branch Greater Than or Equal	bge	if(R[rs]>=R[rt]) PC = Label
Load Immediate	li	R[rd] = immediate
Move	move	R[rd] = R[rs]

REGISTER NAME, NUMBER, USE, CALL CONVENTION

NAME	NUMBER	USE	PRESERVED ACROSS A CALL?
$zero	0	The Constant Value 0	N.A.
$at	1	Assembler Temporary	No
$v0-$vl	2-3	Values for Function Results and Expression Evaluation	No
$a0-$a3	4-7	Arguments	No
$t0-$t7	8-15	Temporaries	No
$s0-$s7	16-23	Saved Temporaries	Yes
$t8-$t9	24-25	Temporaries	No
$k0-$k1	26-27	Reserved for OS Kernel	No
$gp	28	Global Pointer	Yes
$sp	29	Stack Pointer	Yes
$fp	30	Frame Pointer	Yes
$ra	31	Return Address	Yes

R-Format Register Ordering

MIPS instruction

```
arith  $rd, $rs, $rt
```

NOTE:
`opcode` is always 0
`shamt` is always 0
`arith` is arithmetic operation

opcode	rs	rt	rd	shamt	funct
0	rs	rt	rd	0	XX

MIPS instruction

```
shift  $rd, $rt, shamt
```

NOTE:
`opcode` is always 0
`rs` is always 0
`shift` is shift operation

opcode	rs	rt	rd	shamt	funct
0	0	rt	rd	shamt	XX

2. RISC vs CISC: The Famous Battle

- Two major design philosophies for ISA:
- **C**omplex **I**nstruction **S**et **C**omputer (**CISC**)
  - Example: x86-32 (IA32)
  - Single instruction performs complex operation
    - VAX architecture had an instruction to multiply polynomials
  - Smaller program size as memory was premium
  - Complex implementation, no room for hardware optimization
- **R**educed **I**nstruction **S**et **C**omputer (**RISC**)
  - Example: **MIPS**, ARM
  - Keep the instruction set small and simple, makes it easier to build/optimise hardware
  - Burden on software to combine simpler operations to implement high-level language statements