

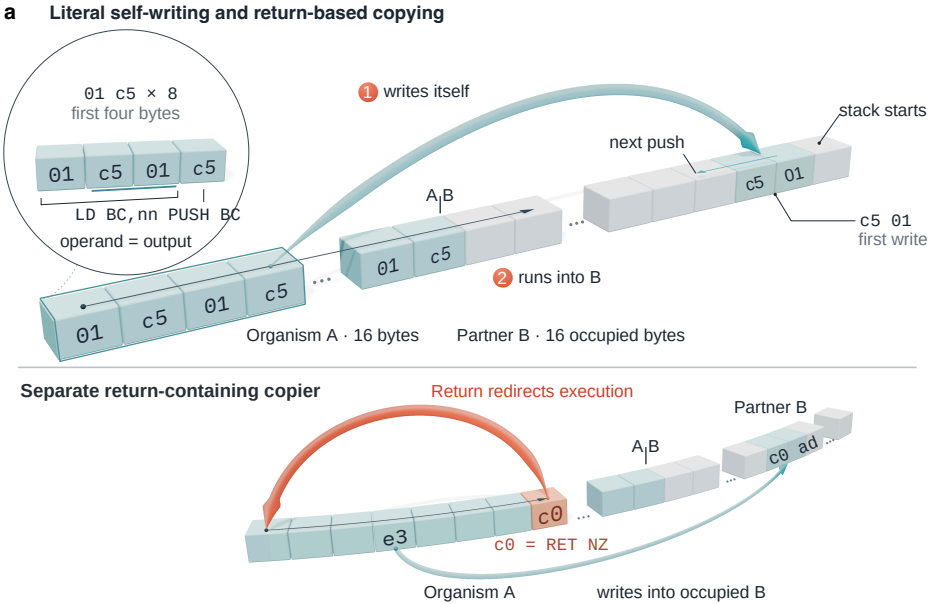


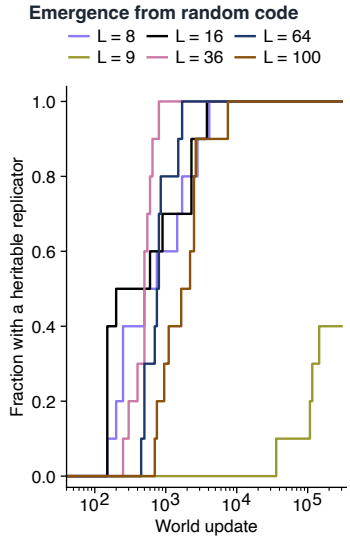


Z80 historical; L = tape bytes; n = 10 per L

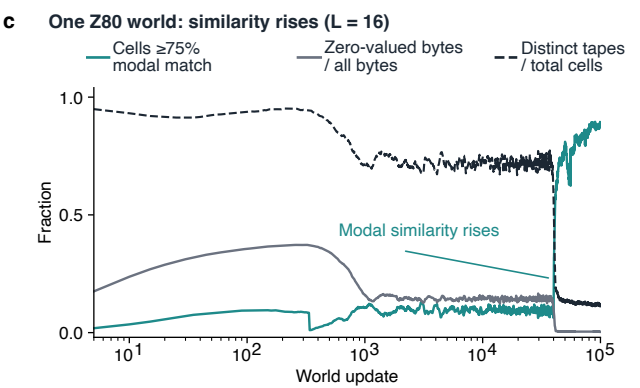

Seed 2002; match to the contemporaneous modal tape

e3 = EX (SP), HL: exchanges HL with stack memory.
Hardware remainder: expected differences. Other remainders: flags/differences.

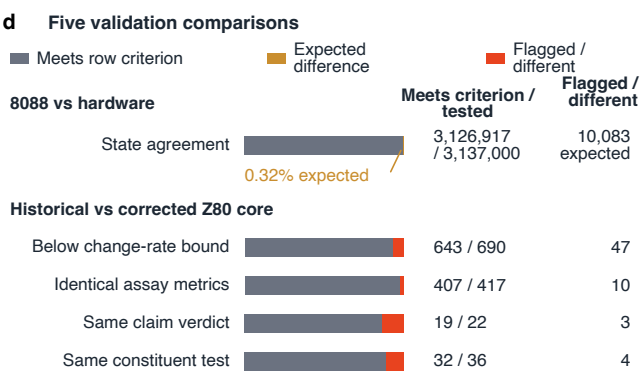

Corrected core = core C1

Units: instruction states; ring conditions; assay combinations; claim verdicts; constituent tests. Ring criterion: upper 95% CI of changed-memory pair rate <0.01%; nonzero changes permitted.