

a **Forward overlap protects a prefix**

One address track: A at 0-11, partner B at 12-23




d = 4 bytes: payload erased

First 4 reads: original core.
Later reads: earlier writes.



d = 12 bytes: 8 payload positions retained

All 12 parental bytes are read before being overwritten.



Each box = 2 bytes; K = core; a-d = four payload blocks

r = d - c: r free byte positions; d copy offset; c core bytes.


Read starts at 0, write at d; aligned forward copy covers both tapes.

Exact: every alternative is copied with its causal source; core unchanged.


Sites: half values after ≥75% tape match; 42 Z80 worlds, 11 6502 worlds.

Dial: before/after = partner match to original parent; gain = (after-before)/(1-before), mean at before <0.75.

b **The law: prediction and measurement**

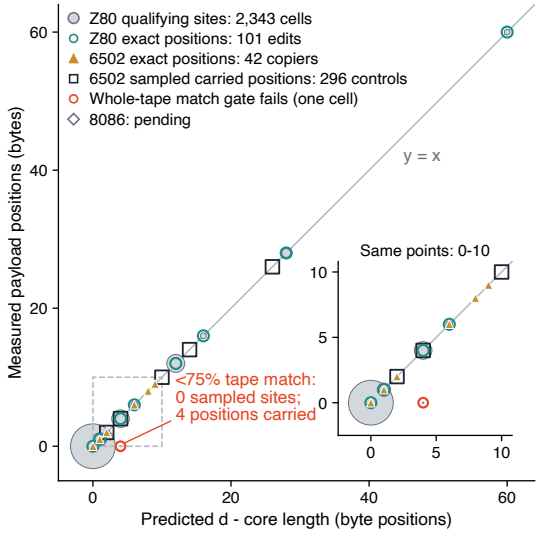


Disc area scales with cells; rings = series only



c **One byte changes the inherited copying rule**

Z80 ldir32: byte 0 sets offset modulo the 64-byte ring.

Displacement 4 bytes: regenerates, erases payload




Edit 0x04 to 0x60: 96 mod 64 = 32 bytes transmits 28 payload positions



Example offspring, lineage 0 at generation 8; teal = parental source.

d **All 256 values of the displacement byte**

Working: gen-2 normalized match gain ≥ 0.3.

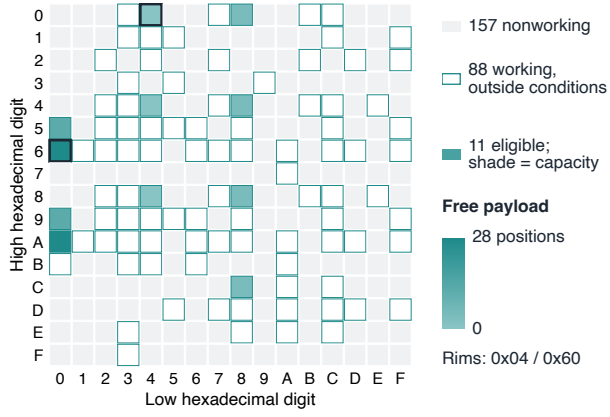

Prediction requires 4 ≤ d ≤ 32, d dividing 32; aligned full-ring copy.