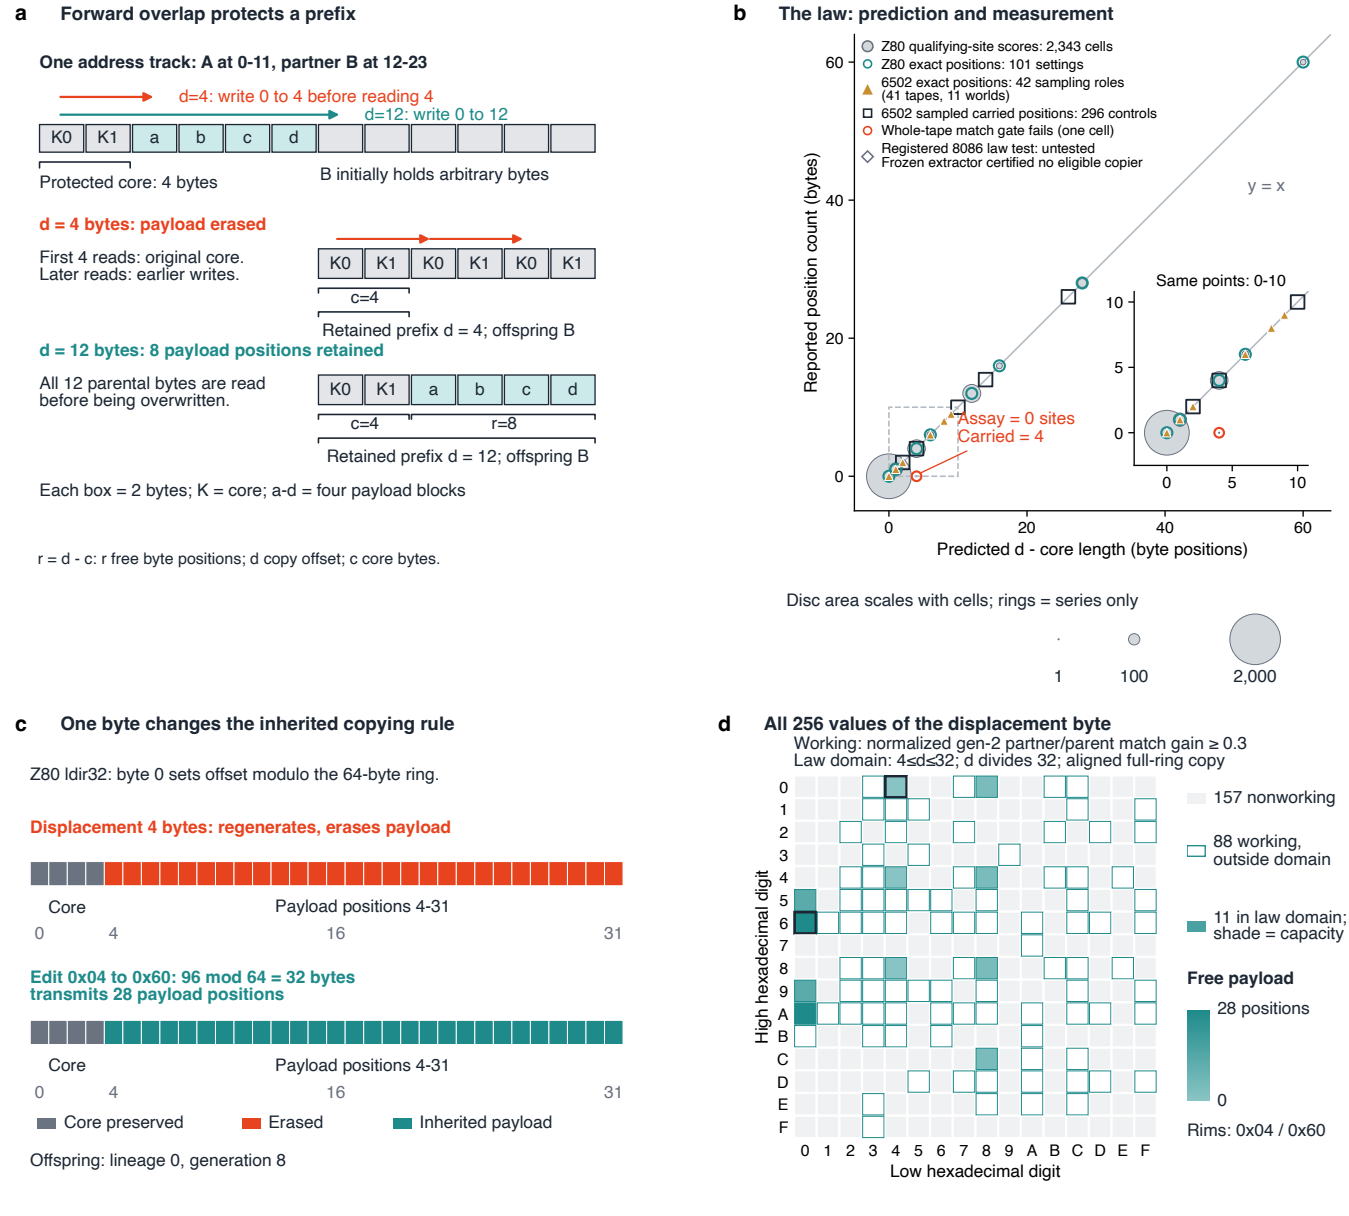

a
Forward overlap protects a prefix
One address track: A at 0-11, partner B at 12-23
d=4: write 0 to 4 before reading 4
d=12: write 0 to 12
K0 K1 a b c d
Protected core: 4 bytes
B initially holds arbitrary bytes
d = 4 bytes: payload erased
First 4 reads: original core.
Later reads: earlier writes.
K0 K1 K0 K1 K0 K1
c=4
Retained prefix d = 4; offspring B
d = 12 bytes: 8 payload positions retained
All 12 parental bytes are read
before being overwritten.
K0 K1 a b c d
c=4
r=8
Retained prefix d = 12; offspring B
Each box = 2 bytes; K = core; a-d = four payload blocks
r = d - c: r free byte positions; d copy offset; c core bytes.
b
The law: prediction and measurement
Z80 qualifying-site scores: 2,343 cells
Z80 exact positions: 101 settings
6502 exact positions: 42 sampling roles
(41 tapes, 11 worlds)
6502 sampled carried positions: 296 controls
Whole-tape match gate fails (one cell)
Registered 8086 law test: untested
Frozen extractor certified no eligible copier
y = x
Same points: 0-10
Assay = 0 sites
Carried = 4
Reported position count (bytes)
Predicted d - core length (byte positions)
0
20
40
60
0
5
10
Disc area scales with cells; rings = series only
1
100
2,000
c
One byte changes the inherited copying rule
Z80 ldir32: byte 0 sets offset modulo the 64-byte ring.
Displacement 4 bytes: regenerates, erases payload
Core
Payload positions 4-31
0
4
16
31
Edit 0x04 to 0x60: 96 mod 64 = 32 bytes
transmits 28 payload positions
Core
Payload positions 4-31
0
4
16
31
Core preserved
Erased
Inherited payload
Offspring: lineage 0, generation 8
d
All 256 values of the displacement byte
Working: normalized gen-2 partner/parent match gain ≥ 0.3
Law domain: 4≤d≤32; d divides 32; aligned full-ring copy
High hexadecimal digit
Low hexadecimal digit
0 1 2 3 4 5 6 7 8 9 A B C D E F
157 nonworking
88 working,
outside domain
11 in law domain;
shade = capacity
Free payload
28 positions
0
Rims: 0x04 / 0x60