

Master Thesis:

Design and Development of a Fog Service  
Orchestration Engine for Smart Factories

Master Thesis  
from

Markus Paeschke

Supervisor: Prof. Dr.-Ing. Thomas Magedanz  
Dr.-Ing. Alexander Willner  
Mathias Brito

**"Es ist nicht wenig Zeit, die wir haben,  
sondern es ist viel Zeit, die wir nicht nutzen."**

**- Lucius Annaeus Seneca -**

Markus Paeschke  
Trachtenbrodtstr. 32  
10409 Berlin

I hereby declare that the following thesis “Design and Development of a Fog Service Orchestration Engine for Smart Factories” has been written only by the undersigned and without any assistance from third parties.

Furthermore, I confirm that no sources have been used in the preparation of this thesis other than those indicated in the thesis itself.

Berlin, June 22, 2017

---

Markus Paeschke

# Acknowledgments

thank your supervisors

thank your colleagues

thank your family and friends

Berlin, June 22, 2017

# Abstract

**Research Area - write about the research area** Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur.

**Application Area - write about the application area** Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur.

**Research Issue - write about the research issue** Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur.

**Own Approach - write about the own approach** Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur.

**Scientific Contributions - write about the scientific contributions** Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur.

**Validation & Outlook - write about the validation and outlook** Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur.



# Zusammenfassung

**Forschungsbereich** Lorem ipsum dolor sit amet, consectetur adipisicing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur.

**wrEingrenzungite** Lorem ipsum dolor sit amet, consectetur adipisicing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur.

**Problemstellung** Lorem ipsum dolor sit amet, consectetur adipisicing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur.

**Eigener Ansatz** Lorem ipsum dolor sit amet, consectetur adipisicing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur.

**Wissenschaftlicher Beitrag** Lorem ipsum dolor sit amet, consectetur adipisicing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur.

**Validierung & Ausblick** Lorem ipsum dolor sit amet, consectetur adipisicing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur.



# Contents

<b>List of Figures</b>	<b>vii</b>
<b>List of Tables</b>	<b>viii</b>
<b>List of Listings</b>	<b>ix</b>
<b>1 Introduction</b>	<b>1</b>
1.1 Motivation . . . . .	1
1.2 Objective . . . . .	2
1.3 Scope . . . . .	3
1.4 Outline . . . . .	4
<b>2 State of the art</b>	<b>5</b>
2.1 Internet of Things . . . . .	5
2.1.1 Industry 4.0 and smart factories . . . . .	6
2.1.2 Cyber Physical Systems . . . . .	8
2.1.3 Fog Computing . . . . .	8
2.2 Virtualization . . . . .	9
2.2.1 Virtual Machines . . . . .	10
2.2.2 Container Virtualization . . . . .	10
2.2.3 Container Orchestration . . . . .	11
2.2.4 Network Function Virtualization . . . . .	11
2.3 Existing tools . . . . .	13
2.3.1 Linux Containers . . . . .	13
2.3.2 Docker . . . . .	13
2.3.3 Kubernetes . . . . .	15
2.3.4 Docker Swarm . . . . .	16
2.3.5 Open Baton . . . . .	16
2.4 Messaging . . . . .	18
2.4.1 Message Queue Telemetry Transport . . . . .	18
2.4.2 ZeroMQ . . . . .	20
<b>3 Requirements Analysis</b>	<b>24</b>
3.1 Technical requirements . . . . .	24
3.2 Functional requirements . . . . .	25
3.3 Use-Case-Analysis . . . . .	25
3.4 Delineation from existing solutions . . . . .	25
3.5 Conclusion . . . . .	27



<b>4</b>	<b>Concept</b>	<b>28</b>
4.1	Overview . . . . .	28
4.2	Development environment . . . . .	28
4.3	Architecture of the system . . . . .	29
4.3.1	Virtualization layer . . . . .	31
4.3.2	Communication layer . . . . .	31
4.3.3	Data layer . . . . .	32
4.3.4	Capability Management . . . . .	33
4.3.5	Orchestration layer . . . . .	33
4.3.6	User interface . . . . .	33
4.3.7	Security . . . . .	34
4.3.8	Continuous Integration . . . . .	34
4.4	Conclusion . . . . .	34
<b>5</b>	<b>Implementation</b>	<b>35</b>
5.1	Environment . . . . .	35
5.2	Project structure . . . . .	35
5.3	Used external libraries . . . . .	37
5.4	Important Implementation Aspects . . . . .	41
5.4.1	motey engine . . . . .	41
5.4.2	Data layer . . . . .	41
5.4.3	Orchestration layer . . . . .	43
5.4.4	Virtualization layer . . . . .	43
5.4.5	Communication layer . . . . .	43
5.4.6	Capability management . . . . .	47
5.4.7	User interface . . . . .	47
5.5	Conclusion . . . . .	47
<b>6</b>	<b>Evaluation</b>	<b>48</b>
6.1	Test Environment . . . . .	48
6.2	Experimental Validation . . . . .	48
6.3	Performance Evaluation . . . . .	48
6.4	Observational Validation . . . . .	49
6.5	Deployments . . . . .	49
6.6	Code Verification . . . . .	49
6.7	Comparative Analysis . . . . .	49
6.8	Conclusion . . . . .	50
<b>7</b>	<b>Conclusion</b>	<b>51</b>
7.1	Summary . . . . .	51
7.2	Dissemination . . . . .	51
7.3	Impact . . . . .	52
7.4	Outlook . . . . .	52
	<b>Acronyms</b>	<b>I</b>
	<b>Glossary</b>	<b>III</b>
	<b>Bibliography</b>	<b>IV</b>

# List of Figures

1	Conceptual architecture . . . . .	3
2	Horizontal vs. Vertical Integration . . . . .	7
3	Structure bare-metal virtualization vs. container virtualization . . . . .	10
4	NFV architecture . . . . .	11
5	Docker container structure . . . . .	14
6	Kubernetes architecture . . . . .	15
7	Open Baton abstract architecture . . . . .	17
8	Open Baton detailed architecture . . . . .	18
9	MQTT publish/subscribe architecture . . . . .	19
10	ZeroMQ Request-Reply architecture . . . . .	21
11	ZeroMQ Publish-Subscribe architecture . . . . .	21
12	ZeroMQ Pipeline architecture . . . . .	22
13	ZeroMQ combination of patterns . . . . .	23
14	Abstract architecture design . . . . .	30
15	Node discovery sequence diagram . . . . .	45

# List of Tables

1	Design principles of each Industry 4.0 component . . . . .	6
---	--	---

# List of Listings

5.1	Command line interface documentation for the daemon process . . . . .	37
5.2	Extract of a sample Inversion of Control (IoC) container from the app_module.py	38
5.3	Implementation of all Flask Application Programming Interface (API) end- points in motey . . . . .	38
5.4	Extract of the VALManager with the method to register plugins . . . . .	40
5.5	Capability JSON validation schema . . . . .	41
5.6	Example of the config.ini file . . . . .	42
5.7	Example of the usage of the configreader . . . . .	43
5.8	Example of the usage of the configreader . . . . .	46
5.9	Example ZeroMQ capability event message . . . . .	46

# Chapter 1

## Introduction

### 1.1 Motivation

The Internet of Things (IoT) is one of the biggest topic in the recent years. Companies with a focus in that area have an enormous market growth with plenty of new opportunities, use cases, technologies, services and devices. Bain & Company predicts an annual revenue of \$450 billion for companies who selling hardware, software and comprehensive solutions in the IoT context by 2020.[1] In order to limit the vast area of IoT, more and more standards are defined and subtopics established. The European Research Cluster on the Internet of Things (IERC) divided them into eight categories: Smart Cities, Smart Health-care, Smart Transport and Smart Industry also known as Industry 4.0 to mention only a few. All of them are well connected, for example a Smart Factory, which is a part of the Smart Industry, can get a delivery from a self driving truck (Smart Transport) which navigates through a Smart City to get to the factory. Such information networks are one of the main goals of IoT. In the Industry 4.0 for example multiple smart factories should be interconnect into a distributed and autonomous value chain. Also the automation in a single factory will be increased which helps to have a more flexible and efficient production process. Currently a factory has a high degree of automation, but due to a lack of intelligence and communication between the machines and the underlying system, they can not react to changing requirements or unexpected situations. One solution to achieve that are Cyber-Physical Systems (CPSs). These are virtual systems which are connected with embedded systems to monitor and control physical processes.[cf. 2, p. 363] A normal Cyber Systems (CSs) is passive, means it could not interact with the physical world, with the appearance of CPSs things can communicate so the system has significantly more intelligence in sensors and actuators.[cf. 3, p. 1363 f.]

Another solution is to change the fundamental architecture of such a system from a monolithic to more distributed multicloud architecture. With Fog Computing the cloud moves away from centralized data centers to the edge of the underlying network.[cf. 4, p. 380] Such a network can have thousands of nodes with multiple sensors, machines or smart components connected to them. An "intermediate layer between the IoT environment and the Cloud"[5, p.236] enables a lot of new possibilities like pre-computation and storage of gathered data, which reduces traffic and resource overhead in the cloud, it keeps sensitive data on-premise[cf. 5, p.236] and enables real-time applications to take decisions based on analytics running near the device and a lower latency. On the other hand there are also a lot of challenges in these highly

heterogeneous and hybrid environment. As an example in some scenarios multiple low power devices have to interact with each other, lossy signals and short range radio technologies are widely used and nodes can appear and disappear frequently.[cf. 6, p. 325] Especially the last case is elaborated because the underlying system has to handle that. Furthermore the required applications running on these nodes can be change commonly and have to be deployed and removed in a dynamical way.

Virtualization with Virtual Machines (VMs) is a common approach in Cloud systems to provide elasticity of large-scale shared resources.[cf. 7, p. 117] A more lightweight, less resource and time consuming solution is container virtualization. "Furthermore, they are flexible tools for packaging, delivering and orchestration software infrastructure services as well as application"[7, p. 117]. Orchestration tools like Kubernetes<sup>1</sup> and Docker Swarm<sup>2</sup> that can deploy, scale and manage containers to clusters of hosts have become established in the last years. If this technology can be moved over to the IoT area, many challenges can be solved. Dynamically deployed applications at the edge of a network can store and preprocesses gather data even if a node have no connection to the cloud. Traffic can be reduced by only transmitting aggregated data back to the cloud. Lossy signals can be compensated due to an autonomous behavior of the different components. More often small low power devices with a limited computational power are used as IoT nodes which also profit rather from lightweight container solutions than from resource consuming VMs. This thesis shows the capabilities of container orchestration for the IoT and smart factories by creating a prototype which can be executed on fog nodes. Therefor an engine will be created which can orchestrate containers based on functional and non-functional constraints on a single fog node or between a cluster of fog nodes.

## 1.2 Objective

This thesis describes an approach to design and implement a fog service orchestration engine for smart factories. The aim of this work is to create a prototype for a fog node, which can deploy containers on the same node or on other network nodes. A fog Node is typically a low power device at the edge of a network, especially in the area of Industry 4.0 and smart factories. Furthermore the prototype should consider specific functional and non-functional constraints while deploying the containers. A condition can be a hardware requirement, a required software or a dependencies to another node. The technical prerequisite and detailed requirements for the prototype as well as the usability of a Graphical User Interface (GUI), which could be for example Open Baton, an European Telecommunications Standards Institute (ETSI) Network Function Virtualisation (NFV) compliant Management And Orchestration (MANO) framework, have to be worked out. The cooperation with the Fraunhofer-Institut für Offene Kommunikationssysteme (FOKUS) plays a prominent role for this thesis, because they have a lot of knowledge and experience especially in this area of IoT and NFV. As the development method of choice a Kanban like process will be used. Kanban is very flexible but also staight forward. There is less meeting overhead then in Scrum, but it also helps to have an eye on the planed and spend resources.

---

<sup>1</sup><https://kubernetes.io>

<sup>2</sup><https://docs.docker.com/engine/swarm>

### 1.3 Scope

As mentioned before, the engine to be developed will be a prototype for a fog node, this means the creation of a MANO engine on the server side is out of scope for this thesis. Open Baton serves as the template for that project and especially the modular architecture and the resulting extensibility will be targeted. Beside that, the whole prototype will be created completely from scratch. The container virtualization will be realized with Docker<sup>3</sup>, an open source container platform. Docker has an API where third party apps can communicate with and can control the engine himself. The functional and non-functional constraints could base on YAML Ain't Markup Language (YAML) schemas which are part of the Topology and Orchestration Specification for Cloud Applications (TOSCA) standard for example. These schemas should be extendable and should fit the needs of the constraint functionality.



Figure 1: Conceptual architecture.

Figure 1 shows a conceptual architecture design. On the right side is the abstract cloud infrastructure. The Network Function Virtualization Infrastructure (NFVI) on the left side includes the Fog Node. These could be for example Open Baton or any other MANO compliant Framework. A single fog node should have the fog node engine, which is the prototype to be developed, as well as a docker engine up and running. The constraint handling is part of the fog node engine and the concrete implementation has to be worked out. The fog node engine can orchestrate the local Docker containers, or if it necessary, it can orchestrate containers to one or multiple other fog nodes. This allows the system to be more flexible and it can achieve an autonomous orchestration level. The autonomous orchestration of containers between fog nodes without an existing connection to the cloud server is desirable, but not part of this thesis. Due to the fact that the prototype will be used in an IoT context, the system will be tested on low power devices, for example on a raspberry pi<sup>4</sup> cluster. It is out of scope to create a system which guaranteed to be executed on arbitrary devices, but theoretically this could be achieved with a system like Open Baton and Docker.

---

<sup>3</sup><https://www.docker.com>

<sup>4</sup><https://www.raspberrypi.org>

## 1.4 Outline

In chapter 2 an introduction in relevant topics like the IoT with the Industry 4.0, CPSs and Fog Computing as subtopics, virtualization especially container virtualization and orchestration and NFV is given. Followed by a comparison of several established tools available on the market and finally some messaging concepts like Message Queue Telemetry Transport (MQTT) and ZeroMQ. The definition of the requirements as well as features and capabilities of the prototype will be shown in chapter 3. Based on that, the architecture of the system is illustrated in chapter 4. The proof-of-concept implementation will be worked out in chapter 5 and the functionality of the plugin will be demonstrated. Chapter 6 summarizes the results of the work and evaluates the viability in terms of software quality, usability and feature-completeness. Finally the gained learnings as well as an outlook for further improvements of the plugin will be argued in chapter 7.



# Chapter 2

## State of the art

This chapter will give an overview into the background and concepts of this thesis. In the first section the IoT and related subtopics like smart factories and Smart Cities are considered. CPSs, that are important for the development of smart factories are also covered in this section. Virtualization in general is the main topic of the second section. First the area of VMs will be highlighted, followed by Container Virtualization. Both are related to each other and sharing some basic ideas. Container Orchestration as an own subsection shows some possibilities of Container Virtualization. The last subsection NFV concludes with an introduction into the virtualization of network node functions to create communication services. Afterwards a brief overview of some major existing tools will be given. The chapter will be finished with an excursion to two important messaging systems.

### 2.1 Internet of Things

The IoT has been a subject of great media- and economically growth in the recent years. In the year 2008 the number of devices which are connected to the Internet was higher than the human population.[cf. 8, p. 3] Cisco Internet Business Solutions Group predicted that the number will grow up to 50 billion in 2020, this equates to around 6 devices per person.[cf. 8, p. 4] Most of today's interactions are Human-to-Human (H2H) or Human-to-Machine (H2M) communication. The IoT on the other hand aims for the Machine-to-Machine (M2M) communication. This allows every physical device to be interconnected and to communicate with each other. These devices are also called "Smart Devices". Creating a network where all physical objects and people are connected via software is one primary goal of the IoT.[cf. 9, p.206][cf. 10, p.2] When objects are able to capture and monitor their environment, a network can perceive external stimuli and respond to them.[cf. 11, p. 40] Therefore a new dimension of information and communication technology will be created, where users have access to everything at any time, everywhere. In addition to smart devices, subcategories are also emerging from the IoT which, in addition to the physical devices, also describe technologies such as protocols and infrastructures. The "Smart Home" has been a prominent topic in media and business for many years. Smart City or Industrie 4.0 are also becoming established and are increasingly popular. But the Internet started with the appearance of bar codes and Radio Frequency Identification (RFID) chips.[cf. 10, p. 13] The second step, which is more or less the current situation, sensors, physical devices,

technical devices, data and software are connected to each other.[cf. 10, p. 13] This was achieved, in particular, by cloud computing, which provides the highly efficient memory and computing power that is indispensable for such networks.[cf. 9, p. 206] The next step could be a "Cognitive Internet of Things", which enables easier object and data reuse across application areas, for example through interoperable solutions, high-speed Internet connections and a semantic information distribution.[cf. 10, p. V] Just as the omnipresent information processing in everyday life, also known as "Ubiquitous Computing", which was first mentioned in the "The Computer for the 21st Century"[12] by Marks Weiser, it will take some time until it is ubiquitous.

### 2.1.1 Industry 4.0 and smart factories

The industry as an changing environment is currently in the state of the so called "fourth industrial revolution". The first industrial revolution was driven by steam powered machines. Mass production and division of labor was the primary improvement of the second industrial revolution, whereas the third revolution was characterized by using electronics and the integration of Information Technology (IT) into manufacturing processes.[cf. 13, p. 1] In the recent years the size, cost and power consumption of chipsets are reduced which made it possible to embed sensors into devices and machines much easier and cheaper.[cf. 5, p. 1] The Industry 4.0 is the fourth step in this evolution and was first mentioned with the German term "Industrie 4.0" at the Hannover Fair in 2011.[cf. 13, p. 1] "Industrie 4.0 is a collective term for technologies and concepts of value chain organization." [cf. 14, p. 11]

Significantly higher productivity, efficiency, and self-managing production processes where everything from machines up to goods can communicate and cooperate with each other directly are the visions of the Industry 4.0.[15, cf.] It also aims for an intelligent connection between different companies and units. Autonomous production and logistics processes creating a real-time lean manufacturing ecosystem that is more efficient and flexible.[15, cf.] "This will facilitate smart value-creation chains that include all of the life-cycle phases of the product from the initial product idea, development, production, use, and maintenance to recycling." [15] At the end, the system can use customer wishes in every step in the process to be flexible and responsive.[15, cf.]

	Cyber-Physical Systems	Internet of Things	Internet of Services	Smart Factory
Interoperability	X	X	X	X
Virtualization	X	-	-	X
Decentralization	X	-	-	X
Real-Time Capability	-	-	-	X
Service Orientation	-	-	X	-
Modularity	-	-	X	-

Table 1: Design principles of each Industry 4.0 component.[cf. 14, p. 11]

Table 1 shows the six design principles which can be from the Industrie 4.0 components. They can help companies to identify and implement Industry 4.0 scenarios.[cf. 14, p. 11]

1. *Interoperability* CPS of various manufacturers are connected with each other. Standards will be the key success factor in this area.[cf. 14, p. 11]

2. *Virtualization* CPS are able to monitor physical processes via sensors. The resulting data is linked to virtual plant and simulation models. These models are virtual copies of physical world entities.[cf. 14, p. 11]
3. *Decentralization* CPS are able to make decisions on their own, for example when RFID chips send the necessary working steps to the machine. Only in cases of failure the systems delegate task to a higher level.[cf. 14, p. 11]
4. *Real-Time Capability* Data has to be collected and analyzed in real time and the status of the plant is permanently tracked and analyzed. This enables the CPS to react to a failure of a machine and can reroute the products to another machine.[cf. 14, p. 11]
5. *Service Orientation* CPS are available over the Internet of Services (IoS) and can be offered both internally and across company borders to different participants. The manufacturing process can be composed based on specific customer requirements.[cf. 14, p. 11]
6. *Modularity* The system is able to be adjusted in case of seasonal fluctuations or changed product characteristics, by replacing or expanding individual modules.[cf. 14, p. 11]

Another important aspect of Industry 4.0 is the implementation of process automation with the focused on three distinct aspects. Starting with the vertical integration, which contains the connection and communication of subsystems within the factory enables flexible and adaptable manufacturing systems.[cf. 16, p. 7 ff.] The horizontal integration, as the second aspect, enables technical processes to be integrated in cross-company business processes and to be synchronized in real time through multiple participants to optimize value chain outputs.[cf. 16, p. 7 ff.] Finally end-to-end engineering, planning, and process control for each step in the production process.[15, cf.]

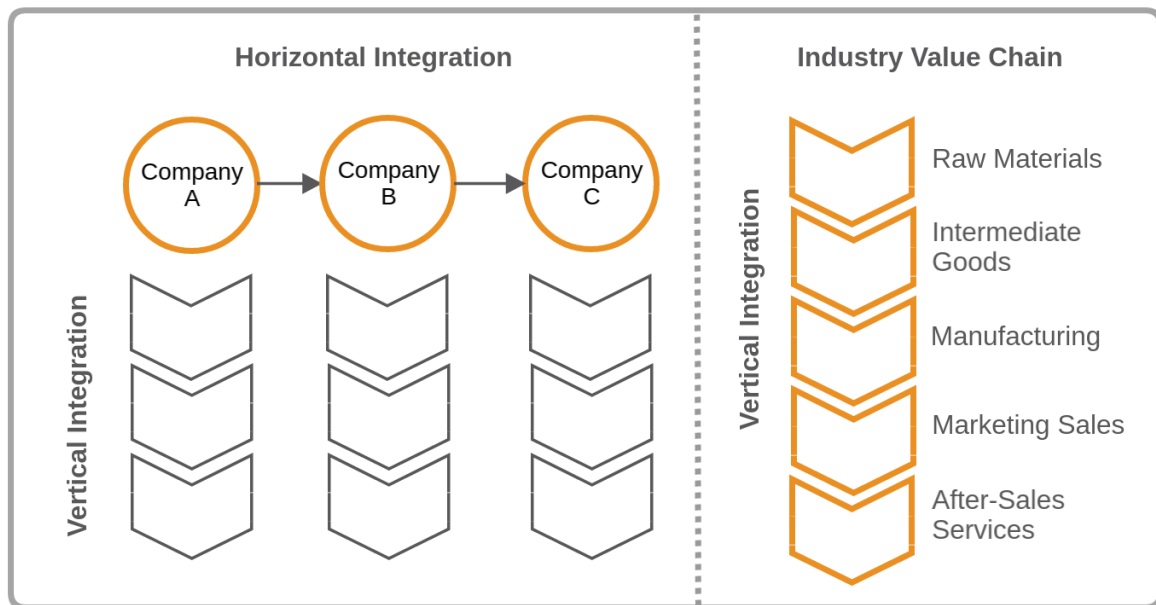


Figure 2: Horizontal vs. Vertical Integration. Adapted from: [17]

Figure 2 illustrates this concept. The left side shows the whole production process over

company boundaries on the horizontal scale, as well as the industry value chain on the vertical scale which is specific for each company. On the right side there is an exemplary industry value chain which starts with the raw materials and ends with the sale of the product to illustrate an more specific example of the vertical integration. From a technical site this means each machine in a factory has exactly to know what they have to do. The underlying system has to be modular and move away from a monolithic centralized system, to a decentralized system which is located locally near the machines himself. The communication path between them have to grow shorter. The machines have to be self organized and should communicate between each other even if the core system is not reachable because of lossy signals or other connection issues. If this can be achieved there will be an highly flexible, individualized and resource friendly mass production, which can be cheaper, faster and can have a much higher fault tolerance.

### 2.1.2 Cyber Physical Systems

As we already now, in smart factories every physical device is connected to each other. Everything can be captured and monitored in each step of a production process. With CPSs every physical entity has a digital representation in the virtual system.[cf. 3, p. 1363] Before a CS was passive, which means there was no communication between the physical and the virtual world.[cf. 3, p. 1364] While new technologies in the physical world, like new materials, hardware and energy, are developed, the technologies in the virtual worlds are also being improved, for example through the use of new protocols, networking, storage and computing technologies.[cf. 3, p. 1364] This adds more intelligence in such systems, as well as a much more flexible and modular structure. A CPS can organize production automatically and autonomously, which eliminate the need of having a central process control.[13, cf.] Thereby the system can handle lossy signals and short range radio technologies, which are widely used in such a context.[6, cf.] In summary CPSs can help to enable the vision of smart factories in both the horizontal as well as the vertical integration.

### 2.1.3 Fog Computing

In the beginning of Cloud Computing most of the systems based on a monolithic architecture. Over time the system was broken down to a more distributes multicloud architecture, similar to microservices. With the appearance of Fog Computing the Cloud also moves from centralized data centers to the edge of the underlying network. Main goal is to improve the efficiency, reduce the traffic and the amount of data which is transferred to the cloud and also process, analyze and store data locally, as well as keeping sensitive data inside the network for security reasons.[cf. 5, p. 236][cf. 6, p. 325][cf. 13, p. 4] In contrast to the goals the definition and understanding of Fog Computing differs. One perspective is to that the processing of the data take place on smart devices, e.g. sensors, embedded systems, etc., at the end of the network or in smart router or other gateway devices.[cf. 13, p. 4] Another interpretation is that fog computing appears as an intermediate layer between smart devices and the cloud.[cf. 5, p. 236] Processing the data near devices enables lower latency and real-time applications can take decisions based on analytics running there. That is important because a continuous connection to the cloud can not always be ensured. However fog computing should not be seen as a competitor of cloud computing, it is a perfect ally for use cases where cloud computing alone is not feasible.[cf. 6, p. 325]

## 2.2 Virtualization

According to the National Institute of Standards and Technology (NIST) the definition of virtualization is: "Virtualization is the simulation of the software and/or hardware upon which other software runs. This simulated environment is called a virtual machine (VM)."[18, p. ES-1]. This means a VM, also referred as guest system, can be executed in a real system, which is referred as host system. A VM has its own Operating System (OS) which is completely isolated from the other VMs and the host system.[cf. 19, p. 2] Basically there are two types of virtualization: Process virtualization where the virtualizing software also known as Virtual Machine Monitor (VMM) is executed by the host OS and only an application will be executed inside the guest OS and on the other side there is the system virtualization where the whole OS as well as the application are running inside the virtualizing software. Figure 3 illustrate both concepts. Examples for process virtualization could be the Java Virtual Machine (JVM)<sup>1</sup>, the .Net framework<sup>2</sup> or Docker<sup>3</sup>, where VMWare<sup>4</sup>, Oracle Virtual Box<sup>5</sup>, XEN<sup>6</sup> or Microsoft Hyper-V<sup>7</sup> are only some examples for system virtualization. The benefits of all virtualization techniques are the rapid provisioning of resources which could be Random Access Memory (RAM), disk storage, computation power or network bandwidth. Beside that, no human interaction is necessary during the provisioning process. Elasticity which scales a system in a cost-efficient manner in both directions, up and down. Customer as well as the provider profit from such a system. Security based on the isolation of the VMs is another huge benefit. Different processes can not interfere with each other and the data of a single user can not be accessed by other users of the same hardware. A challenge despite all the mentioned benefits is the performance. Running VMs increases the overhead and reduces the overall performance of a system. Therefore the specific use case have to consider these behavior.

---

<sup>1</sup><https://www.java.com>

<sup>2</sup><https://www.microsoft.com/net>

<sup>3</sup><https://www.docker.com>

<sup>4</sup><http://www.vmware.com>

<sup>5</sup><https://www.virtualbox.org>

<sup>6</sup><https://www.xenproject.org>

<sup>7</sup><https://www.microsoft.com/de-de/cloud-platform/server-virtualization>

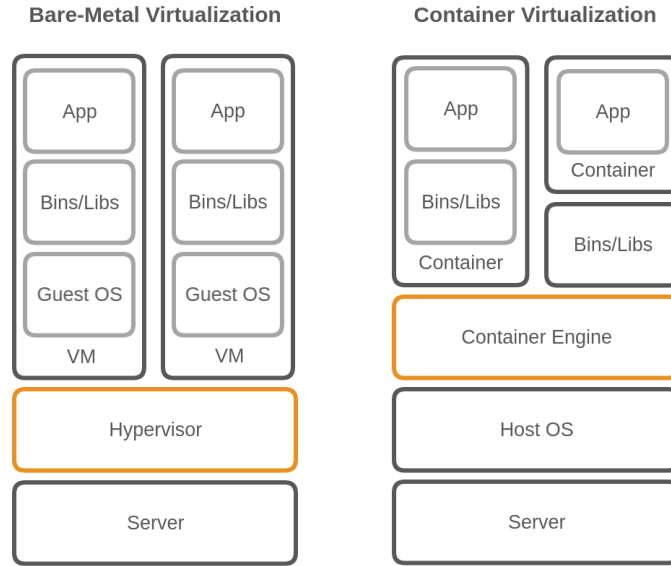


Figure 3: Structure bare-metal virtualization vs. container virtualization. Adapted from: [20, p. 2]

### 2.2.1 Virtual Machines

VMs are the core virtualization mechanism in cloud computing. There are also two different designs for hardware virtualization. The first and more popular type for cloud computing is the *bare-metal virtualization*. It needs only a basic OS to schedule VMs. The hypervisor runs directly on the hardware of the machine without any host OS in between. This is more efficient, but requires special device drivers to be executed. The other type is the *hosted virtualization*. Unlike the first type the VMM run as a host OS process and the VMs as a process supported by the VMM. No special drivers are needed for these type of virtualization, but by comparison the overhead is much bigger. For both types, the performance limitation remains. Each VM need a full guest OS image in addition to binaries and libraries which are necessary for the application to be executed.[cf. 4, p. 381] If only a single application, which only needs a few binaries and libraries, is needed to be virtualized, VMs are too bloated.

### 2.2.2 Container Virtualization

Container virtualization which is also known as Operating System-level virtualization, is the second virtualization mechanism. It based on fast and lightweight process virtualization to encapsulate an entire application with its dependencies into a ready-to-deploy virtual container.[cf. 21, p. 72] Such a container can be executed on the host OS which allows an application to run as a sand-boxed user-space instance.[cf. 22, p. 1] All containers share a single OS kernel, so the isolation supposed to be weaker compared to hypervisor based virtualization.[cf. 19, p. 2] Compared to VMs, the number of containers on the same physical host can be much higher, because the overhead of a full OS virtualization is eliminated.[cf. 19, p. 2]

### 2.2.3 Container Orchestration

Containers by itself helps to develop and deploy applications, but containers release their full potential only when they are used together with an orchestration engine. Before orchestration engines, the deployment of an application or service was realized via Continuous Integration (CI) and deployment tools like Vagrant or Ansible. Deployment scripts or plans was created and be executed every time an application changed or should be scaled up on a new machine. This was less flexible and error-prone. Orchestration engines cover these needs by automatically choosing new machines, deploying containers, handle the lifecycle of them and monitor the system. These flexibility enables a new level of abstraction and automation of deployment. There are a bunch of orchestration engines out there. For Docker, Kubernetes and Docker Swarm are the most popular at the moment.

### 2.2.4 Network Function Virtualization

NFV is an architectural framework to provide a methodology for the design, implementation, and deployment of Network Functions (NFs) through software virtualization.[cf. 23, p. 8][24, cf.] "These NFs are referred as Virtual Network Functions (VNFs)."[23, p. 8] It takes into consideration Software Defined Networking (SDN) and preparing for the use of non-proprietary software to hardware integration instead of multiple vendor specific devices for each function, e.g. routers, firewalls, storages, switches, etc.[24, cf.] Now high-performance firewalls and load balancing software for example can run on commodity PC hardware and traffic can be off-loaded onto inexpensive programmable switches.[25, cf.]

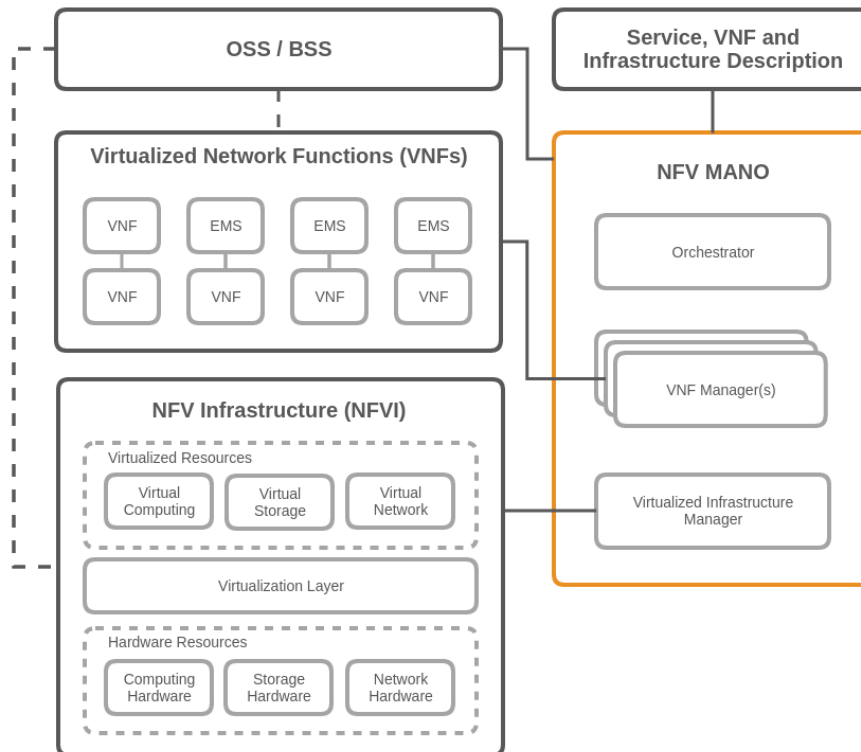


Figure 4: NFV architecture. Adapted from: [26]

Some benefits are speed, agility and cost reduction in deployment as well as execution manner.[25, cf.] Using homogeneous hardware simplifies the process of planning and reduces power, cooling and space needs.[25, cf.] Through virtualization providers can utilize resources more effectively, by allocating only the necessary resources for a specific functionality.[25, cf.] Overall NFV can reduce Operating Expense (OpEx) as well as Capital Expenditure (CapEx) and can decreasing the time necessary to deploy new services to the network.[25, cf.] To achieve NFV the ETSI has defined a framework the Network Function Virtualisation Management And Orchestration (NFV-MANO)<sup>8</sup> and the Organization for the Advancement of Structured Information Standards (OASIS) created TOSCA a NFV specific data model and templates to coordinate and orchestrate the NF into the cloud.

**OSS / BSS** refers to the Operations Support Systems (OSS) and the Business Support Systems (BSS) of a telecommunication operator.[27, cf.] The OSS is responsible for the underlying soft- and hardware system, for example for network and fault management. The BSS on the other hand is responsible for the business handling, for example customer and product management. Both can be integrated with the NFV-MANO.[27, cf.]

**VNFs** are the virtualized network elements, for example a virtualized router or virtualized firewall. Even if only a sub-functions or a sub-components of a hardware element is virtualized, it is called VNF.[27, cf.] Multiple sub-functions can act together as one VNF.

**Element Management System (EMS)** is responsible for the functional management of a single or multiple VNFs.[27, cf.] This includes fault, configuration, accounting, performance and security management.[27, cf.] Furthermore the EMS itself can be a VNF or it can handle a VNF through proprietary interfaces.[27, cf.]

**NFVI** is the environment where VNFs are executed. This includes physical resources as well as virtual resources and the virtualization layer. The physical resources could be a commodity switch, a server or a storage device. These physical resources can be abstracted into virtual resources through the virtualization layer which is normally a hypervisor. If the virtualization part is missing, the software runs natively on the hardware and the entity is no longer a VNF it is then a Physical Network Function (PNF).[27, cf.]

**NFV-MANO** consists of three main parts. The Virtual Infrastructure Manager (VIM) is "responsible for controlling and managing the NFVI compute, network and storage resources within one operator's infrastructure domain"[27]. The Virtual Network Function Manager (VNFM) manages one or multiple VNFs. This includes the life cycle management of the VNF instances, such as instantiate, edit or shut down an VNF instance.[28, cf.] In contrast to the EMS, the VNFM handles the virtual part of the VNF, for example instantiate an instance, while the EMS handles the functional part of an VNF, such as issue handling for a VNF. The orchestrator as the third component in the NFV-MANO block manage network services of VNFs. It is responsible for the global resources management, such as computing

---

<sup>8</sup>[http://www.etsi.org/deliver/etsi\\_gs/NFV-MAN/001\\_099/001/01.01.01\\_60/gs\\_NFV-MAN001v010101p.pdf](http://www.etsi.org/deliver/etsi_gs/NFV-MAN/001_099/001/01.01.01_60/gs_NFV-MAN001v010101p.pdf)



and networking resources among multiple VIMs.[27, cf.] The orchestrator interacts with the VNFM to perform actions, but not with the VNFs directly.[27, cf.] TOSCA is often used with NFV-MANO frameworks like Cloudify<sup>9</sup> or Open Baton.[28, cf.]

**TOSCA** is developed by the OASIS to deliver a declarative description of a NFV application topology for network or cloud environments.[28, cf.] In figure 4 it is represented by the *Service, VNF and Infrastructure Description* block. Beside that, it can also be used to define workflows which should be automated in a virtualized environment.[28, cf.] The TOSCA modeling language can specify nodes, whereby a node can be a network, a subnet or only a server software component, and it also handles relationships between the nodes and also services.[28, cf.] To define schemas, relationships and the configuration of such an infrastructure, it uses YAML files for ease the usage.[28, cf.] TOSCA works pretty well with NFV-MANO components to automate the deployment and management of NFs and services.

## 2.3 Existing tools

There are several advantages of using frameworks and sophisticated tools, for example they reduces the time and energy in developing any software, they are more secure, well tested and they provides a standardized system through which users can develop applications. They also allow to create a prototype of an application in a short amount of time. To achieve the benefits the user has to spend some time to learn the concepts, functions and how to use a framework.

### 2.3.1 Linux Containers

When we talk about container virtualization nowadays, Docker have to become one of the most famous tools out there. It based on Linux Containers (LXC)<sup>10</sup> a technology which uses kernel mechanisms like *namespaces* or *cgroups* to isolate processes on a shared OS.[cf. 4, p. 381] Namespaces for example are used to isolate groups of processes whereas cgroups are used to manage and limit resources access just like restricting the memory, disc space or Central Processing Unit (CPU) usage.[cf. 4, p. 381] "The goal of LXC is to create an environment as close as possible to a standard Linux installation but without the need for a separate kernel." [21, p. 72] There are several other container virtualization tools out there like OpenVZ<sup>11</sup> or Linux-VServer<sup>12</sup>. In contrast to them, an advantage of LXC is that it runs on an unmodified Linux kernel. This means that LXC can be executed in most of the popular Linux distributions these days.

### 2.3.2 Docker

As mentioned before, Docker based on LXC. This allows the Docker Engine to build, deploy and run containers in an easy and customizable way. Similar to VMs, containers are executed

---

<sup>9</sup><http://getcloudify.org>

<sup>10</sup><https://linuxcontainers.org/>

<sup>11</sup>[https://openvz.org/Main\\_Page](https://openvz.org/Main_Page)

<sup>12</sup><http://www.linux-vserver.org>

from images. A mayor benefit of Docker is the fact, that Docker images can be combined like build blocks. Each image can build on top of another. Figure 5 illustrates the concept for the image of the pretty famous Django<sup>13</sup> web framework. In that case, the Django image, which is the resulting image, based on the Python 3.4 image which again based on the Debian Jessie image. All of them are read-only, but Docker adds a writable layer, also known as *container layer*, on top of the images as soon as the container will be created. File system operations such as creating new files, modifying or deleting existing files are written directly to these layer.[29, cf.] The other images don't get involved. These chaining mechanism of images allows Docker to ease the use of dependencies and administrative overhead.

Beside that, Docker is split up in several components, such as the Docker Engine, the Docker Registries and Docker Compose to mention only a few. The Docker Engine is a client-server application which can be distinguished by the Docker client, a Representational State Transfer (REST) API and the Docker server. Latter is a daemon process which "creates and manages Docker objects, such as images, containers, networks, and data volumes"[30]. The client is a Command Line Interface (CLI), which interact via a REST API with the daemon.[30, cf.]

Another component, the Docker Registry, is basically a library of Docker images. They can be public or private available, as well as on the same machine like the Docker daemon or an external server.[30, cf.] The most popular one it the official Docker Hub<sup>14</sup>. There is also an Docker Store<sup>15</sup>, where customers can buy and sell trusted and enterprise ready containers and plugins. With the Docker client it is pretty easy to *search* for new containers and to *pull* containers from or *push* containers to a specific repository.



Figure 5: Docker container structure.

With Docker Compose multiple Docker Containers can be executed as a single application. Therefore YAML compose file will be used to configure and combine the services. For example the already mentioned Django image can be executed and linked together with a MongoDB<sup>16</sup>

<sup>13</sup><https://www.djangoproject.com/>

<sup>14</sup><https://hub.docker.com>

<sup>15</sup><https://store.docker.com>

<sup>16</sup><https://www.mongodb.com>

images. The main benefit is the ease of configure dependencies between several containers and configuration steps. These concept is similar to deployment tools like Vagrant<sup>17</sup>, Ansible<sup>18</sup> or Puppet<sup>19</sup>.

A major benefit of Docker is that the execution environment of an application is completely the same on a local machine as on the production environment.[cf. 20, p. 2] There is no need to do things differently when switching from a development environment like a local machine, to a production environment like a server.[cf. 20, p. 2]

### 2.3.3 Kubernetes

Kubernetes is an open source container cluster manager which was released 2014 by Google. It is "a platform for automating deployment, scaling, and operations"[31, p. 1] of containers. Therefore a cluster of containers can be created and managed. The system can for example schedule on which node a container should be executed, handle node failures, can scale the cluster by adding or removing nodes or enable rolling updates.[31, p. 5 f.]

Figure 6 illustrates the basic architecture of Kubernetes. The user can interact with the Kubernetes system via a CLI, an User Interface (UI) or a third party application, over a REST API to the Kubernetes Master or more specifically the API Server in the master. The master himself controls the one or multiple nodes, monitor the system, schedule resources or pull new images from the repository, to name only a few tasks.



Figure 6: Kubernetes architecture. Adapted from: [32, p. 4]

Each node has a two way communication with the master via a kubelet. In addition each node has the services necessary to run container applications like Docker. Furthermore Kubernetes can combine one or multiple containers into one so called Pod.[cf. 33, p. 7] "Pods are always co-located and co-scheduled, and run in a shared context." [34] One node again

---

<sup>17</sup><https://www.vagrantup.com>

<sup>18</sup><https://www.ansible.com>

<sup>19</sup><https://puppet.com>

can execute multiple Pods. Pods are only temporary grouped containers with a non-stable Internet Protocol (IP) address. After a Pod is destroyed it can never be resurrected. Pods can also share functionality to other Pods inside a Kubernetes cluster. A logical set of Pods and the access policy of them is called a Kubernetes service. Such a service can abstract multiple Pod replicas and manage them. A frontend which have access to the service do not care about changes in the service. Any change, be it a down scale or an up scale of the system, remains unseen for the frontend. They are exposed through internal or external endpoints to the users or the cluster.[cf. 32, p. 11] Labels can be used to organize and to select subsets of Kubernetes Objects, such as Pods or Services.[35, cf.] They are simply key-value pairs which and should be meaningful and relevant to users, but do not imply semantics to the core system.[35, cf.]

The kube-proxy is a network proxy and load balancer which is accessible from the outside of the system via a Kubernetes service.[cf. 33, p. 7] "Each node and can do simple TCP,UDP stream forwarding or round robin TCP,UDP forwarding across a set of backends." [36] The Replication Controller is one of the mayor controllers in a Kubernetes System. It ensures that a specified number of pod replicas are running and available at any time.[37, cf.] If for example one node disappear because of connection issues, the Replication Controller will start a new one. If the disappeared node is available back again it will kill a node. These functionality increases the stability, the availability and the scalability of the system in an autonomous manner. The last important component in Kubernetes are rolling updates. With rolling updates the system can update one pod at a time, rather than taking down the entire service and update the whole system.[38, cf.] This also increases the stability and availability of the system and eases the managing of container clusters.

### 2.3.4 Docker Swarm

The basic functionality of Docker Swarm is pretty similar to Kubernetes: It is possible to create, manage and monitor a cluster of multiple machines running Docker on it. Before Docker version 1.12.0, Docker Swarm was an independent tool, which is now integrated in the Docker Engine.[39, cf.] No additional software is necessary to have a bunch of machines work together as a so called swarm. Similar to Kubernetes, Docker Swarm needs a master node called manager and several worker nodes. The manager for example keep track of the nodes and their lifecycle and it can start new instances of an image if one or multiple nodes disappear. Furthermore Docker Swarm has a build in proxy and load balancer, which can redirect requests to the node with the necessary container running on it or redirect requests based on the workload of the machines. Compared to Kubernetes, Docker Swarm is more lightweight, but misses some features like the label functionality or the schema definition of a pod. But as mentioned before, both tools are pretty similar and aim for the same goal.

### 2.3.5 Open Baton

Open Baton<sup>20</sup> is an open source ETSI NFV compliant MANO Framework[40, cf.]. "It enables virtual Network Services deployments on top of heterogeneous NFV Infrastructures." [40] It works together with OpenStack and provides a plugin mechanism which allows to add additional VIMs.[40, cf.] In Open Baton it is implemented as the VIM as first Point of Pres-

---

<sup>20</sup><https://openbaton.github.io>

ence (PoP) and uses the OpenStack APIs.[40] All the resources in the NFVI are controlled by the VIM, in this case OpenStack.

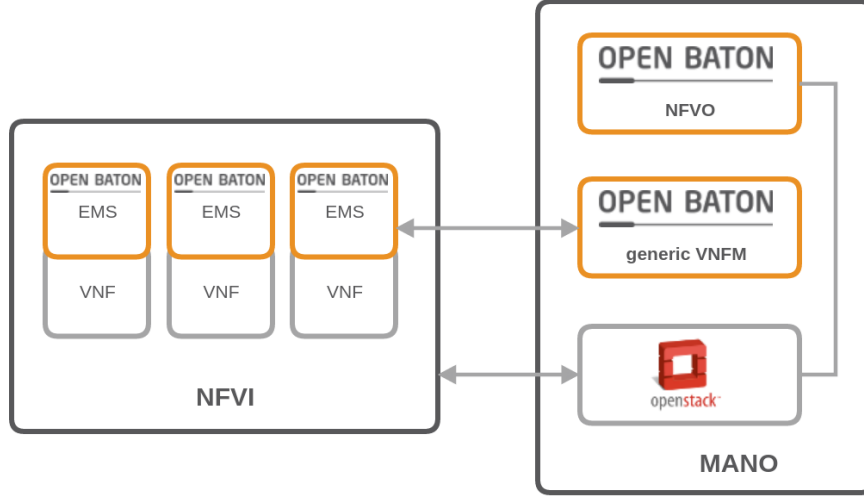


Figure 7: Open Baton abstract architecture. Adapted from: [40]

In the basic configuration Open Baton provides a generic VNFM with generic EMS related to the VNFs, but it can also be replaced with custom components. The VNFM can use a REST API or an Advanced Message Queuing Protocol (AMQP) message queue to communicate with the system. Figure 7 illustrates the abstract architecture of Open Baton together with OpenStack and a generic VNFM. The Network Function Virtualisation Orchestrator (NFVO) is completely designed and implemented as described in the ETSI MANO standard.[40] It communicates with the VIM to orchestrate resources and services and it is implemented as a separate module, so it can be replaced with a custom one if necessary.

A more detailed view of the Open Baton architecture is shown in figure 8. As mentioned before each component communicate over the message queue and can be extended or replaced if necessary. Additional components, such as the Autoscaling Engine (AE) or the Fault Management (FM) system, are provided to manage a network service at runtime.[40] The necessary informations are delivered from the monitoring system available at the NFVI level, which can also be extended or replaced with any monitoring system by implementing a custom monitoring driver.[40] The VIM Driver mechanism allows to replace OpenStack with external heterogeneous PoPs, but without the need of modifying the orchestration logic.[40] Beside the generic VNFM, also the Juju<sup>21</sup> VNFM can be used to deploy Juju Charms or Open Baton VNF packages. Open Baton also provides a marketplace<sup>22</sup> for free and open source VNFs, which can directly be loaded into the system.

Furthermore Open Baton comes with a modern and easy to use GUI and user management. The typical workflow of running a NFVI is by starting them through the dashboard. The user input, in this case deploying a VNF, will be submitted as a request to the NFVO. There the orchestrator request the VIM, for example OpenStack, to instantiate the network service. The VIM allocated the resources on the datacenter and starts the VMs based on the provided

<sup>21</sup><https://www.ubuntu.com/cloud/juju>

<sup>22</sup><http://marketplace.openbaton.org>

service description, for example through a TOSCA description. After the machines are finally booted, the EMSs will be installed to communicate with the VNFMs. Open Baton now can send lifecycle events to all the VNFMs responsible for the VNFs which are part of the network service. Finally the VNFMs processes the VNFs via the EMS on to the given resources of the NFVI on the datacenter. The services are started and the system is up and running.



Figure 8: Open Baton detailed architecture. Adapted from: [40]

## 2.4 Messaging

### 2.4.1 Message Queue Telemetry Transport

The MQTT protocol formerly known as MQTT-S or MQTT-SN is a lightweight communication protocol developed by Andy Stanford-Clard and Arlen Nipper.[41, cf.] Meanwhile MQTT is an OASIS standard<sup>23</sup>, which is often used in an IoT and M2M context.[cf. 42, p. 5] It has a publish/subscribe architecture, which makes it easy to implement and allows thousands of remote clients to be connected to a single server at the same time.[cf. 42, p. 5] The recipient of a message which is called consumer in the MQTT context is completely decoupled from the sender, mostly called producer, via a broker. In general the workflow is that a consumer subscribe to a specific topic at the broker and the producer can send messages with a specific topic to the broker. The producer does not know if there is any consumer subscribed to the topic of a message. The broker is responsible for delivering messages to consumers, by receiving them from the producer and send out copies to the consumers. Figure 9 illustrates this concept.

In contrast to Client/Server protocols such as the HTTP, MQTT is eventoriented, which means that the client does not have to constantly ask the server if there is new data, the

<sup>23</sup>[https://www.oasis-open.org/committees/tc\\_home.php?wg\\_abbrev=mqtt](https://www.oasis-open.org/committees/tc_home.php?wg_abbrev=mqtt)

broker informs the consumer when there is new data on a topic.[43, cf.] In direct comparison, this concept decrease the traffic, the amount of connections at the server and the delay of the message to be send to the clients.

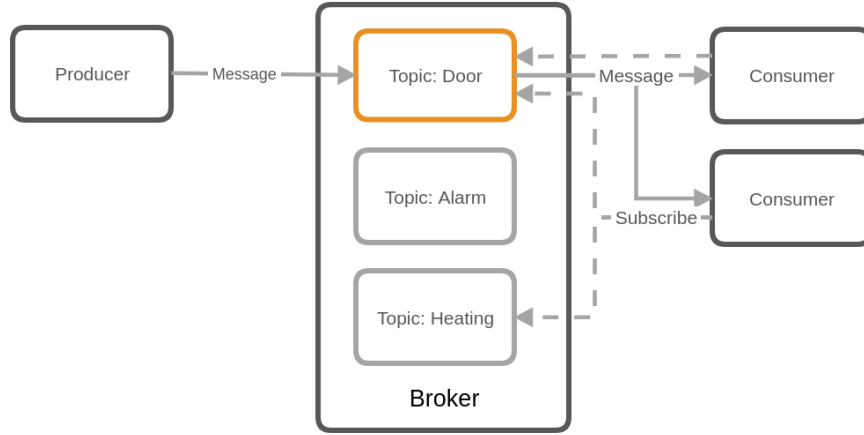


Figure 9: MQTT publish/subscribe architecture. Adapted from: [43]

Beside the publish/subscribe architecture and the lightweight protocol, MQTT has only few but useful features. **Quality of Service (QoS)** define the level of reliability with which messages are delivered.[43, cf.] There are three different levels, where each level differs in reliability and resources usage.[43, cf.] In an IoT context, for instance gathering temperature sensor data from a low power device, most of the time keeping the resources usage low is more important than the reliability of getting every single message.

At *QoS level 0 - at most once*, it is garantied that a message can only arrieves once, but they can also be lost during transfer. A single message will be send once and the publisher does not check the success of receiving them. This pattern is also called *Fire and Forget*, it is fast and resources friendly.[43, cf.]

At *QoS level 1 - at lest once*, it is grantied that a message will be received at the consumer. After the publisher send the message with a specific packet identifier, the consumer will confirm the receipt of the message with a so called pubback packat. The pubback packet also have the same packet identifier included, so that the publisher will know that the message was successfully delivered. If a message get lost during transmission, they will be resend. It is also possible, that the same message appears multiple times at the consumer, depending on the delay in the network.

The most secure but also most resources consuming level is At *QoS level 2 - exactly once*. At this level it is garantied, that a message is exactly received once. It is not possible that a message appears multiple times or never. This level has a two-level confirmation process, where at first the consumer confirms the receive of the message and afterwards the producers confirms the receive of the confirmation. Therefor both sides can be sure to not send or receive duplicates and it is garantied that a message will be received.

Furthermore the broker has two features to handle connection loses: the *last will testament* and the *message persistance*. The former feature will send a last message from the broker to a consumer if the connection to the publisher will get lost. This could be for instances the information that the connection get lost or something similar. The message persistance will be used if one consumer lose the connection to the broker. In this case the message will be

stored and delivered as soon as the consumer reconnects. With the *retrained messages* feature, a consumer which is connected for the first time to the broker will get the last message send for a specific topic. This can be useful if the temperature from a sensor should be displayed, but the value will only be fetched every 30 seconds. This would lead to the behaviour that the initial value on consumer side will in worst case be unknown for 30 seconds. *Persistent sessions* allows a connection be established even if the consumer disappers. In this case all the messages incurred will be stored and delivered if the consumer resume the session. The session can be identified with a unique client identifier.[43, cf.]

Due to the fact that MQTT is a simple protocol with a small footprint and the QoS handshake enables the protocol to be independent from TCP so that it can be used even on devices without a TCP/IP stack like embedded devices such as an Arduino.[43, cf.] There the protocol can be used via a bus or a serial port.[43, cf.] MQTT himself support the protection of the messages via username nad password and the communication can be encrypted with SSL or TLS on the transport layer.[43, cf.] The broker can additionally use client certificates to authenticate them or restrict the access via access conrol lists such as IP filtering.[43, cf.] MQTT is available for most of the common programming languages and platforms.

## 2.4.2 ZeroMQ

ZeroMQ is an messaging and communication framework to send atomic messages between applications and processec across various transports like Transmission Control Protocol (TCP), in-process, inter-process or multicast.[44, cf.] Every message will be send over sockets via several patterns like publish-subscribe, fan-out or a simple request-reply.[44, cf.] ZeroMQ has an asynchronous I/O model which allows to create high-performance and scalable multicore applications.[44, cf.] To distinguish it from messaging frameworks like AMQP<sup>24</sup> ZeroMQ has no dedicated broker inbetween. The benefit is that there is no single point of failure, not bottleneck and no need to maintain another component, but ZeroMQ still has the advantages of such a messaging system.

ZeroMQ supports five different transport types.

**In-Process** is used for local (in-process or inter-thread) communication transport. This transport passes the messages directly via memory between threads.[45, cf.] These transport type is optimal for creating multithreaded applications without providing access to the outside. This is the fastest tranport type available in ZeroMQ.

**Inter-Process Communication (IPC)** provides also a local communication transport, but passes messages via the OS dependend IPC machanism, for example UNIX domain sockets. An application can provide a local API for another local appliction via IPC. Also IPC is much faster than the TCP communication.

**TCP** is an ubiquitous, reliable, unicast transport to provide an API over a network.[46, cf.]

**Pragmatic General Multicast (PGM)** is a multicast communication transport using the PGM standard protocol<sup>25</sup> and the datagrams are layered directly on top of IP datagrams.[47, cf.] It is helpful to send a squence of packets to multiple consumers at the same time. Therefore PGM and also EPGM can only be used with the publish/subscribe pattern.

**Encapsulated Pragmatic General Multicast (EPGM)** is similar to PGM but with the difference that the PGM datagrams are encapsulated inside UDP datagrams.[47, cf.]

---

<sup>24</sup><https://www.amqp.org>

<sup>25</sup><https://tools.ietf.org/html/rfc3208>



ZeroMQ has several basic patterns and most of them are combinable. To describe them all in detail would exceed the scope of this work, so only the most relevant ones are considered. **Request-Reply** is comparable with a Hypertext Transfer Protocol (HTTP) request-response. The client send a message to the server, which does some work and send back a message afterwards. It is represented by the REQ-REP socket pairs in ZeroMQ. Figure 10 illustrates the pattern.

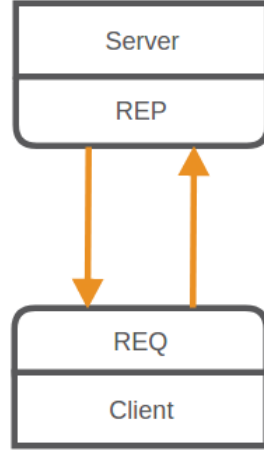


Figure 10: ZeroMQ Request-Reply architecture. Adapted from: [44]

The **Publish-Subscribe** pattern in ZeroMQ is basically comparable with the MQTT publish-subscribe pattern, but without the broker inbetween. This ends up in the fact that every consumer has to know the publisher and has to connect to them. A direct connection between them will be established. Similar to MQTT, the publisher will send out the message to every subscribed consumer. It is also possible to subscribe to more than one topic. In ZeroMQ this pattern is represented by PUB-SUB socket pairs. Figure 11 shows this pattern.

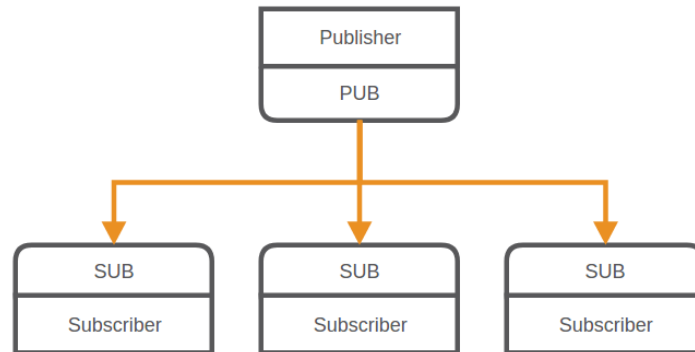


Figure 11: ZeroMQ Publish-Subscribe architecture. Adapted from: [44]

The **Pipeline** pattern is also known as the *Divide and Conquer* pattern. There we have a Ventilator which produces multiple tasks that can be done in parallel, a set of workers that can process these tasks and a sink that collects the results from the workers.[44] Benefit of this pattern is, that the workers divide the tasks, this means it will increase the

calculation time based on the connected workers. Furthermore the works can pull a new task if they are done. This means a worker has a minimal idle time. Queuing is provided by ZeroMQ. It is also possible to add and remove workers dynamically. This makes an application much more scalable. Finally the sink pull the data from the worker in a so called *fair-queuing*. This means the sink will pull one package from each worker one after another, then he starts from the beginning and will pull again only one package, even if one or multiple worker should have multiple packages retrievable. The whole pattern is shown in figure 12

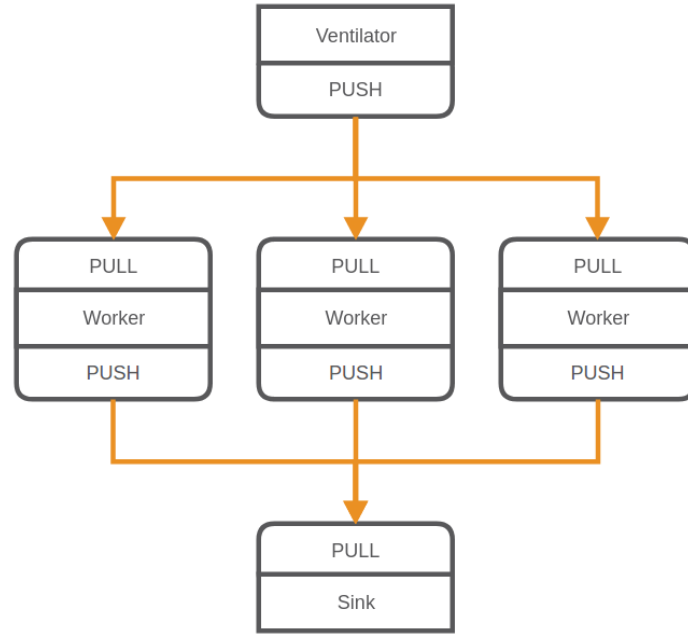


Figure 12: ZeroMQ Pipeline architecture. Adapted from: [44]

**Exclusive pair** connects two sockets exclusively, for example two threads in a process.[44]  
**Combinations of them** at least these some of the patterns in ZeroMQ. All of these patterns can be combined to create much more advanced combinations. Figure 13 illustrates such a combination.

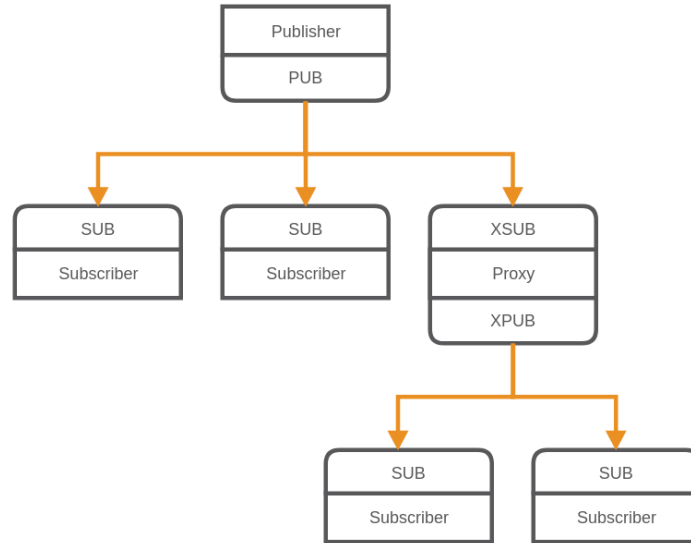


Figure 13: ZeroMQ combination of patterns. Adapted from: [44]

There is a combination between two publish-subscribe patterns and a proxy in between. This could be helpful to create a nested topology, for instances for a controller in a smart home environment. Multiple controllers can be subscribed to a server and multiple nodes can be subscribed to one controller. As mentioned before, there are much more combinations possible. A good overview of many of them can be found in the official guide<sup>26</sup> of ZeroMQ.

By default ZeroMQ has no encryption or authentication mechanism built in. There is a dedicated project called CurveZMQ<sup>27</sup> which enables these functionalities and it is also created by the ZeroMQ maintainers. Since ZeroMQ version 4.x CurveZMQ comes built-in. Finally ZeroMQ has libraries for most of the common programming languages.

<sup>26</sup><http://zguide.zeromq.org/page:all>

<sup>27</sup><http://curvezmq.org>

## Chapter 3

# Requirements Analysis

Based on the fundamentals the requirements for the prototype to be developed will be formulated in this chapter. Thereby relevant aspects for the specific implementation will be considered. The analysis, the creation of requirements and the commitment from all sides to these requirements is an important step to successfully realize a project, not only in the software development area. It does not matter if it is a private project, a company product or a project from a customer. The better a project is defined and everyone is on the same state, the better the final result will be. In these thesis the FOKUS acts as the customer. Each step has to be discussed and approved by a representative of the FOKUS. Due to the fact that the prototype will be created from scratch most of the concepts have to be created in brainstorming meetings. An agile development process will be used to react to rapidly changing requirements. As mentioned before a Kanban like method will be used in this project.

### 3.1 Technical requirements

As the fundamental requirement, the prototype to be developed has to create, manage and maintain virtualized containers on a fog node. Tools like Open Baton inherently supports OpenStack as the ETSI MANO VIM layer. Most MANO tools like Open Baton uses OpenStack which deploys virtual machines to virtualize the NFs. This is a rock solid solution for a cloud environment. Unfortunately a bare-metal virtualization is most of the times not feasible on small power devices like they are used in the IoT area. Therefore a much more efficient and lightweight solution like container virtualization should be used and handled by an orchestration engine. The desired service like a NFs can be bundled in one or multiple containers and executed afterwards on the expected IoT nodes. Such a bundle of containers should be passed to the node as a build plan or a blueprint of the service. The fog node engine should accept the blueprint and deploy the containers to the desired virtualization layer. Afterwards the lifecycle of the services should be monitored.

The second functional requirement is the implementation of a constraint logic which will be used to filter relevant nodes during the orchestration. A constraint can be a functional and non-functional capability. For example a specific hardware component, like a sensor or a ZigBee dongle, which is necessary to execute the NF or a hardware requirement, like CPU power, RAM or disk space. It could also be a non-functional constraint, for example a specific

software which has to be installed or a protocol which can be used. The engine should be able to manage these constraints by itself and if necessary for all adjacent nodes and should consider them while choosing a suitable nodes for the desired NF. The whole functionality should work similar to the labels in Docker Swarm. There a Docker Swarm node can be have multiple labels, which can be considered when deploying an image. This behavior should be achieved by the fog node engine.

Some side conditions should also be fulfilled. The whole system should be modular and easy to extend. Modules should be as decoupled as possible and the whole system should be controled via an API. The centralized cloud environment should be easiely replacable and should not be exclusively bound to Open Baton or any other tool. The same applies to the prototype, it should not be bound to Docker only and should be able to use other virtualization tools. Finally the whole system should be well tested and documented.

## 3.2 Functional requirements

After the general conditions for the prototype has been defined, the functional requirements will also be addressed. **Rework that section also more**

## 3.3 Use-Case-Analysis



## 3.4 Delineation from existing solutions

This section is intended to show the features of existing systems and the main differences will be highlighted. As mentioned before, the prototype to be developed should orchestrate virtualized containers on nodes based on functional and non-functional constraints. Therefore the focus of this consideration is the orchestration as well as the constraints.

**Kubernetes** is especially made for Docker and can orchestrate, scale and manage containers. It is open source, made by Google and one of the most popular orchestration tools out there. It has on huge and pretty active community and is used by several well known companies[48] like ebay<sup>1</sup> and Wikimedia<sup>2</sup>. Due to the fact, that is exclusivly made for Docker, it means that the system is not made to easily switch the underlying container engine if needed.

---

<sup>1</sup><http://www.ebay.com>

<sup>2</sup><https://www.wikimedia.org>


As mentioned in section 2.3.3 Kubernetes supports labels. These are simple key-value pairs provided as JavaScript Object Notation (JSON) objects which can be added by the system administrator to a Kubernetes Object like a pod or a service. The labels are stored on the Kubernetes Master and can be used to filter specific pods or services during the deployment phase. This behavior is pretty close to the one which should be achieved.

Kubernetes is made for the cloud, which means it is not intended to be used on low power devices. There are some trials to do so, but until now it is not used in a productive IoT environment. Furthermore Kubernetes is not ETSI MANO compliant, but provides an easy to use web UI.

**Docker Swarm** is pretty similar to Kubernetes from a functional point of view, which means it has nearly the same pros and cons. It is open source as well, has a quite active community and it is also made exclusively for Docker. Biggest benefit compared to Kubernetes is, that it is build the Docker Engine. No separate installation is necessary and it can be used out of the box.

Also in terms of labels, both platforms are similar. Docker Swarm uses labels in the same way Kubernetes is using them. The user can add them during the initialization phase or edit them during runtime. They are also key-value pairs or alternatively keys only. By default labels can not be predefined in a JSON file and applied to the node afterwards. The placement have to be done by hand via the Docker client or the REST API.

Just as Kubernetes, Docker Swarm is not ETSI MANO compliant and provides no build-in GUI, but there are several third party tools out in the market. Due to the fact that it is a build-in function of Docker, the setup is quite easy and much more lightweight than Kubernetes. This means it will also work on IoT devices by default.



## OpenStack

**Cloudify** is completely compatible to the ETSI MANO standard and can be used as the NFVO, as well as the generic VNFM of this architecture.[49, cf.] It is also able to interact with multiple VIMs, containers, infrastructures and devices and due to the fact that it can be extended with plugins, it is can be used together with several well known tools like OpenStack, Docker or even Kubernetes.[49, cf.] Through these flexibility Cloudify can also be used in an IoT environment if an appropriate VIMs plugin is used. Downside is that Cloudify himself is very limited without a powerfull underlying orchestration tool.

By default it is also not possible to orchestrate functionalities based on constraints. To enable this behavior the used plugin has to support such a functionality like Docker Swarm or

Kubernetes. Cloudify provides an easy to use GUI where the user can use the whole system, as well as a clean commandline tool. By using YAML files to build blueprints based on the TOSCA standard, the creation of such a blueprint is similar to well known workflows like the creation of a Ansible or Vagrant deployment schema. With the help of the Cloudify Composer the creation of a blueprint is getting much easier and also usable for users without any coding experience.

### 3.5 Conclusion



# Chapter 4

## Concept

This chapter introduces the architectural design of plugin respect to the previously defined requirements. Therefore the used development environment will be analyzed. Followed by the initial architecture of the plugin to be developed. Based on that the different layer of the system will be elaborated. **Rework that section**

### 4.1 Overview



### 4.2 Development environment

The development environment is crucial for both the implementation of the prototype, as well as the choice of possible plugins and libraries. It should be easy to used and fast to implement, but it should also consider the knowledge of the FOKUS as well as the developer.

**Java** is still one of the most important programming languages out there.[50, cf.] Java is platform independent, because Java will not be executed directly in the OS, instead it will be executed in the JVM. The downside is, that especially because of the JVM, Java programmes are much more inefficient regarding RAM and CPU usage. Java is object oriented, which makes it easy to extend. There are a lot of well designed and developed established libraries and tools out there, which makes it easy to create rapid prototypes.

**Node.js** is a relatively young programming environment, which was created 2009 by Ryan Dahl and based on the Google JavaScript engine V8. The V8 engine is written in C++,



which makes the language less resources consuming then for example Java. A program will be written in JavaScript, but it is also possible to load C or C++ extension. Node.js is also available for all common OSs. Due to the fact that Node.js has a build-in webserver component, it is easy to create web applications. Libraries can be added via the package manager called npm. JavaScript and also Node.js have a pretty active community, which tends to be as messy as they is increasing. There is enormous amount of libraries and tools out there, where each library has its reason to exist, but it is also a vast of pretty similar designs and use-cases.

**Python** is one of the most used programming languages with a huge and active community.[50, cf.] It is a dynamic typed programming language with an automatic memory management which uses both, reference counting and garbage collection at the same time.[51, cf.] Python can use several programming paradigms like the object oriented programming or functional programming. Core philosophy is make it simple, make it beautiful, make it explicit and make it readable. Currently two versions are maintained in parallel, 2.7 and the newer 3.6. Due to the fact that a huge codebase is still working with Python 2.x, this version is still under development.[52, cf.] Python has a tremendous amount of libraries which can be installed via the Python package manager called pip<sup>1</sup>. Similar to Node.js Python allows to write C extension. Finally there are several Python compilers which compiles Python code to other high-level languages like Java, C or JavaScript.

**Go** is the new emerging language created by Google and was announced end of 2009. It follows the traditions of C, but also takes added concepts to create a more modern programming language. According to their own statements go is expressive, concise, clean, and efficient.[53, cf.] Furthermore it has a garbage collection and run-time reflection, it is fast, statically typed and a compiled language.[53, cf.] Go is used in production by several tools like Docker, Kubernetes and OpenShift. Downside is that there are not so much libraries out right now and there are no long time experience in the critical mass.

Open Baton, as one of the actively maintained project at the FOKUS, is written in Java and is also has ports to Python and go. Python in general is used for several projects at the FOKUS. Taking also the criterias from section 3.1 into account Python will be used as the programming environments of choice. The GUI will only be a very basic web client, which uses Vue.js<sup>2</sup> as its main framework and some smaller tools like the pretty famous bootstrap framework.

### 4.3 Architecture of the system

The overall architecture of the system can be separated into two levels. Figure 14 will point up the architecture. The first level is the *centralized fog level*. This could be for example a cloud server or management node in a fog cluster. Ideally this level should be implemented with an MANO compliant framework. Hereinafter Open Baton will referred as the tool of choice for that level. Main function will be the creation of the NFVI as well as the deployment

---

<sup>1</sup><https://pypi.python.org/pypi/pip>

<sup>2</sup><https://vuejs.org>

of deployment plans for the NFs. Open Baton will also have an overview of all existing nodes and can manage and maintain them.

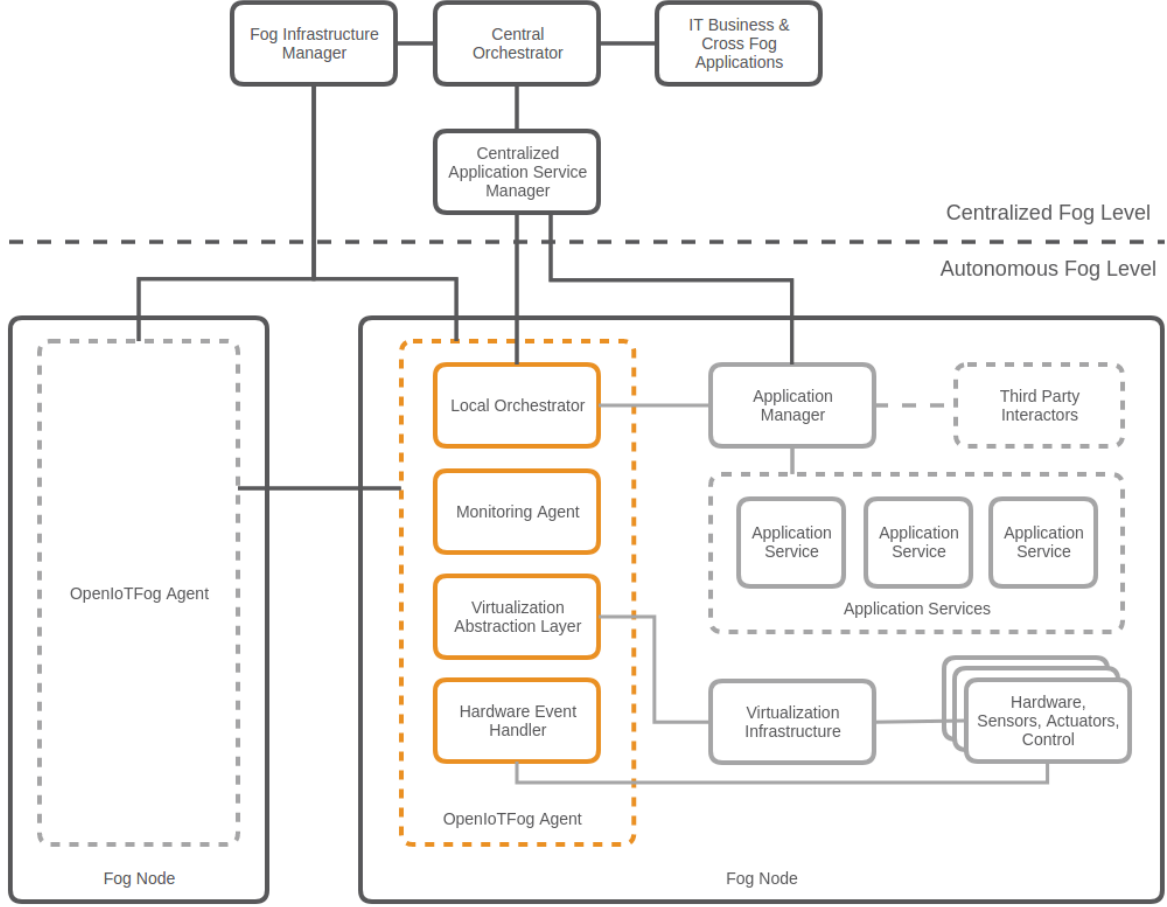


Figure 14: Abstract architecture design

The second level is the *autonomous fog level*. The prototype to be developed will be located in this level. It includes all existing fog nodes, as well as the prototype referenced as the *OpenIoTfog Agent* in figure 14. Each node must have a running instance of the OpenIoTfog Agent to be part of the system. Beside the prototype a node can have several hardware devices, sensors and actuators connected to them. A virtualization infrastructure such as Docker or XEN, must be installed to be used by the prototype. These infrastructure can create the containers and VNFs. Further it is also possible to have additional third party tools installed which can interact with the them as well.

The OpenIoTfog Agent has several external connection points. It has a REST API implemented to get some informations about the status of the fog node, as well as endpoints to receive the deployment plans from centralized fog level. A MQTT connection to a broker, which can be running in the centralized fog level as well as on any other fog node, is used for node discovery. Finally there are some ZeroMQ endpoints for capability discovery, image deployment and node-to-node communication. A detailed description will be shown in the following sections.

One of the most important components is the *Local Orchestrator*. It is responsible for the deployment of the containers as well as the inter-node communication. The latter is necessary to let the nodes act in an autonomous way, so that they can react to changing requirements, even when the centralized fog level disappears. Therefore each node must have knowledge and should be able to interact with each other. Besides that the local orchestrator is tightly coupled to the *Virtualization Abstraction Layer (VAL) Manager*. This is an abstraction layer for each virtualization component in the system, for example Docker or a bare-metal virtualization like XEN. These components should be implemented as plugins, so that it is easy to add or remove virtualization components. Therefore Yapsy<sup>3</sup> is used as the plugin system of choice.

The *Hardware Event Handler* is a communication endpoint for other third party components. For example an external hardware listener could send a message to the event handler to register a new connected device like a Zigbee dongle or a bluetooth stick. This component should allow multiple third party components to send events to them. Finally the *Monitoring Agent* is used to log all ongoing events and gives the maintainer of the system an overview of the system processes. [write more - probably about architecture MVC](#)

The working title of the project will be **Motey**. In the following the prototype will also be referenced as Motey.

#### 4.3.1 Virtualization layer

The virtualization layer is basically an abstraction layer to generalize the different virtualization engines. Therefore a so called VAL manager which will be implemented with the facade design pattern is used to load the plugins and abstract the methods of the plugins. As mentioned before to realize the plugin functionality the Yapsy library will be used. The library offers a way to easily add new plugins to the system and is also designed to be easy to use. It only depends on Python standard libraries and is lightweight by design. Each supported virtualization engine needs its own concrete plugin implementation which should use an interface to have a common ground. The supported default engine is Docker, but could be extended in a future version of Motey.

#### 4.3.2 Communication layer

The communication layer is a pretty important component in the Motey engine. Here three different communication points are necessary to provide the basic functionalities which are needed for the fog node agent.

The first subcomponent is the **node discovery**. The idea behind the node discovery is that each node automatically can register and unregister himself to the cluster. This means in the moment of the startup of a node, they will send out a message, with an information request about all subscribed nodes. To realize that MQTT will be the tool of choice. The MQTT broker will receive and forward the message to all subscribed nodes and each node will respond with an information message to the broker again, which will send the message out again. Therefore each node will be up-to-date at each time. As long as there is no appearance or disappearance of any node, the network will not be stressed. To provide a better flexibility the MQTT broker can be executed in the centralized fog level or even on a node in the autonomous

---

<sup>3</sup><http://yapsy.sourceforge.net/>

fog level. This allows the system to operate even if the centralized fog level disappears due to network issues or any other communication problems. It is also possible to let all nodes communicate with each other once they shared their information. Smaller connection issues can be covered with this mechanism. As the MQTT broker Mosquitto<sup>4</sup> will be the tool of choice. It is an eclipse<sup>5</sup> project which means it is open source and under continuous development. The project website describes itself as "a lightweight server implementation of the MQTT protocol that is suitable for all situations from full power machines to embedded and low power machines"[54].

The next subcomponent is the **inter- and intra-node communication**. Both kinds of communication will be realised with ZeroMQ. Some of the most important patterns and transport types in ZeroMQ was described in section 2.4.2. For the node-to-node communication the *Request-Reply* pattern via TCP will be used. Typical function calls would be the capability discovery where a node will request another node for their capabilities, the deployment or termination of an image on an external node and the request for an image status. ZeroMQ always requires an IP to establish a connection to another node, therefore we had the node discovery which was described before. This allows us to connect to any other node in the cluster. In addition to the intra-node communication, also an inter-node communication will be implemented. It will be used to add new capabilities to a node. Therefore one or multiple third party applications should be connectable to a single ZeroMQ endpoint via the publish/subscribe pattern over IPC. Different to a normal publish/subscribe pattern, the endpoint will act as the subscriber so that multiple publishers can push messages to them. Besides that each exposed socket should be configurable via the configuration file.

The last subcomponent is the **REST API**. It will be mainly used for the communication with the centralized fog level, because most of the orchestration tools out there are using REST for transferring data. In comparison to an implementation with ZeroMQ, this is much bigger overhead in terms of traffic and latency, but to have a better compatibility with other systems, this API will be implemented. As the tool of choice Flask<sup>6</sup> will be used. It is a lightweight and robust Python webserver, which is open source, well documented and under constant development. The REST API itself will follow the Hypermedia As The Engine Of Application State (HATEOAS) constraint with the addition that each endpoint will have a version number in the Uniform Resource Locator (URL) to ensure backwards compatibility if something changes in the implementation.

All the mentioned subcomponents should be controlled by a so called *communication manager* which will be implemented with the facade design pattern. That decouples the communication layer from the other components, the whole system can be maintained much easier and each subcomponent can be easily replaced by any other technology if necessary. This also makes the code more readable and leads up to a cleaner code structure.

### 4.3.3 Data layer

As mostly the data layer is used to persist necessary data. This includes the deployed services, adjacent nodes and the capabilities of the node. As database engine the lightweight document

---

<sup>4</sup><https://mosquitto.org>

<sup>5</sup><http://www.eclipse.org>

<sup>6</sup><http://flask.pocoo.org>

oriented database TinyDB<sup>7</sup> will be used. It is easy to use and has no execution overhead and is also good to use for small datasets. The whole data layer should be as abstracted as all the other components before. Therefore repositories for each content type will facade the tinydb methods and allows the underlying library, in this case TinyDB, to be replaced easily and without modifying several classes. The configuration of the databases should be stored in the global config file as well.

#### 4.3.4 Capability Management

The *Capability Management* is used to create, persist, modify and remove the capabilities of the current node. As mentioned before all the capabilities will be stored in the data layer via TinyDB. Furthermore the *Hardware Event Handler* is part of this layer. It enables the system to get new capabilities from third party apps via a ZeroMQ endpoint. As mentioned in the 4.3.2 the endpoint will be implemented as a form of the publish/subscribe pattern and should allow one or multiple publishers to push messages to the handler. Also internal components like the VAL plugins can add new capabilities to the system.

#### 4.3.5 Orchestration layer

As one of the most important layers, the *Orchestration Layer* will be a connector between all the nodes in a cluster and also between multiple components in the Motey engine himself. Primary it is used to handle the business logic of the deployment of new services. If a new service will be send to the communication layer it will be forwarded to the orchestration layer and will be parsed, validated and handled by them. This layer is also responsible for checking the necessary capabilities for each service component and will search for suitable nodes in the cluster if one or multiple capabilities are not fulfilled. Beside that, this component will also handle the lifecycle of a service during the deployment phase. [more](#)

#### 4.3.6 User interface



---

<sup>7</sup><http://tinydb.readthedocs.io>

### 4.3.7 Security



### 4.3.8 Continuous Integration

Continuous integration is nowadays a frequently used technique to automate repeating deployment steps into a self executing pipeline. It starts by running unit tests, code style checks and ends up with deploying the compiled program to a server or a marketplace. Due to the fact that Github<sup>8</sup> will be used to host and maintain the git repository for the Motey project, the pretty famous and seamless integrated Travis CI<sup>9</sup> will be used to implement the continuous integration pipeline. To start with Travis CI only the Github account has to be synced with the platform and a YAML configuration file has to be placed in the root folder of the git repository. Travis CI supports several programming languages and also various third party services, like Docker Hub or Amazon AWS. Everytime a new commit will be pushed to the git remote repository, a new build will be started at Travis CI. At first a virtual machine will be started by Travis CI. Afterwards all necessary components like libraries and tools will be installed in the virtual machine. Finally all predefined tasks from the YAML file will be executed. In terms of the Motey project, unit tests will be executed, as well as code style checks and if a version from the master branch will be build, a Docker container will be created and pushed to the related Docker Hub repository. This pipeline guarantees that the project is tested and a coding standard is enforced. Further the manual build of the Docker container including the upload to the Docker Hub will be obsolete.

## 4.4 Conclusion



---

<sup>8</sup><https://github.com>

<sup>9</sup><https://travis-ci.org>

# Chapter 5

## Implementation

This chapter describes the implementation of the motey engine as well as the deployment and capability logic. Used technologies, libraries and tools, as well as custom components would be presented and the functionality will be demonstrated. Thereby challenges and problems during the development of the plugins will be shown and the solutions will be discussed.

### 5.1 Environment

The motey engine is designed to be executed on low-power devices like a Raspberry Pi. The following software is required to execute the whole software stack.

- Ubuntu version 14.10 or higher
- Python 3.5 or newer
- Docker 17.3 or higher

On hardware side motey will be tested on Raspberry Pi type 2 B or newer. Depending on the amount and type of the executed Docker images, the hardware specifications may vary.

### 5.2 Project structure

Beside the main folder with the motey engine, the project contains several directories with helpful scripts and tools. A brief overview about the project structure will be given in this section. A detailed explanation of all files will be omitted, as this would exceed the scope of the thesis.

- **Directory:** `./` has all the necessary configuration files for the different services.
  - **File:** `.dockerignore` is used during the build process of a Docker image. Excludes several folders during the build phase.
  - **File:** `.editorconfig` contains information for Integrated Development Environments (IDEs) and editors to guarantee a consistent coding style.

- **File:** `.gitignore` excludes file to be tracked by the version control system git.
- **File:** `.travis.yml` is used by the continuous integration tool Travis CI.
- **File:** `AUTHORS.rst` a list of all contributors.
- **File:** `CHANGELOG.rst` this document records all notable changes to the motey engine.
- **File:** `LICENSE` the License of the project (Apache License Version 2.0).
- **File:** `main.py` can be used to start motey in debug mode.
- **File:** `MANIFEST.in` contains meta information for the Python setup procedure.
- **File:** `README.rst` file to show up a short documentation on github and will act as the starting point of the project.
- **File:** `setup.py` will be used to install motey on a local machine.
- **docs:** contains the files to create and display the documentation resources.
  - **Directory:** `source` has all the files to autogenerate the documentation files from the source code.
  - **File:** `Makefile` this file was created by the Sphinx documentation tool. By executing the *Makefile* the related documentation files will be created.
- **motey:** this folder contains the motey main engine. It is the main Python project. The whole structure will be explained on the next pages in detail.
- **motey-docker-image:** has all the necessary files to create a Docker image.
  - **File:** `Dockerfile` to build the Docker image. Is analogous to a Makefile but can only be used by the Docker engine.
  - **File:** `setup.sh` will be executed during the build phase and will install necessary tools and can executed command line instructions.
  - **File:** `requirements.txt` a list with the Python requirements which are necessary to run the motey engine and which should be installed during the build phase via pip.
- **resources:** is a resource folder for the github documentation. Will only be used by the *README.rst* file in the root folder and the *index.rst* file in the docs source folder.
- **samples:** contains some samples to test the functionality of the motey engine. Is primarily a playground to test new functions.
- **scripts:** some scripts which will be executed frequently during the development phase.
  - **Folder:** `config` configuration files which could be used for the mosquitto MQTT broker Docker image.
  - **File:** `addcapability.py` can be used to add new capability entries to a running motey instance.
  - **File:** `start_test_setup.sh` can be used to start a new local Docker test cluster.



- **tests:** contains all the unit test which are executed by the continuous integration script and the Python setup procedure.
- **webclient:** this folder contains the GUI for the motey engine. Will also be described on the next pages in detail.

## 5.3 Used external libraries

This section will show up some of the most important libraries used in the motey engine. Each library will be introduced briefly and the reason for using it in the project will be shown.

**daemonize** allows to run a services as a daemon process. It is made exclusively for Unix-like systems. The library will create a pid file after starting the service. In the motey engine, the file path can be configured via a configuration file. The daemon process can be controlled via a command line interface.

---

```

1  Motey command line tool.
2
3  Usage:
4      motey start
5      motey stop
6      motey restart
7      motey -h | --help
8      motey --version
9
10 Options:
11     -h, --help          Show this message.
12     --version           Print the version.

```

---

Listing 5.1: Command line interface documentation for the daemon process

After the motey engine is installed via the setup script, this command line tool will be available in the terminal.

**dependency-injector** is a microframework for Dependency Injection (DI) in Python. The DI pattern allows to move the responsibility for creating a dependency from the concrete objects to a factory or a framework which creates the dependency graph. This grants the single responsibility concept for classes and makes the whole code base much easier to unit test, because a dummy object can be passed to the constructor of the class. It is also possible to mocked the object with the help of a mocking library. To realize DI in the Motey a so called *app\_module.py* was created which uses the *dependency-injector* framework to create the dependency graph. Several IoC containers are created in that file and will be used by the framework to generate the glue code. Most of the injected components are instantiated as singleton objects to guarantee that there is only one active instance of that component at a time. The implementation of the singleton design pattern is also provided by the framework. Listing 5.2 demonstrates the implementation of such an IoC container.

---

```

1  class DIRepositories(containers.DeclarativeContainer):
2      capability_repository = providers.Singleton(CapabilityRepository)
3      nodes_repository = providers.Singleton(NodesRepository)
4      service_repository = providers.Singleton(ServiceRepository)

```

---

Listing 5.2: Extract of a sample IoC container from the `app_module.py`

**Docker Software Development Kit (SDK)** The Docker Python library is a wrapper around the Docker command line tool. Every command that can be executed with this tool can also be executed from any python code. In the initializing phase the library will connect to the Docker Engine API and will perform all the actions through them. This can be realized via an URL to the REST API or via an unix system socket connection. In the motey engine the second method will be used, but can be replaced without any limitations. The library is used as a VAL plugin and will be automatically loaded at runtime via the VALManager and the Yapsy plugin system.

**Flask** is a framework to create web applications. Flask does not provide any templating or database engine, nor does it enforce a specific file structure. Instead it will support extensions to add functionalities like that so that the developer can choose the tools of choice.[55, cf.] Nevertheless Flask is production ready and is used in several big projects like Pinterest[56] or Twilio[57].

Flask can use so called *Blueprint* to configure new routes in the webserver. A Blueprint is basically a Python class that can define methods like *get* or *post* to handle the specific HTTP verbs. This is useful to create valid HATEOAS REST APIs. Each Blueprint will be represented by an URL endpoint.

Listing 5.3 illustrates the implementation of all API endpoints in motey.

---

```

1  def configure_url(self):
2      self.webserver.add_url_rule('/v1/capabilities',
↪  view_func=Capabilities.as_view('capabilities'))
3      self.webserver.add_url_rule('/v1/nodestatus',
↪  view_func=NodeStatus.as_view('nodestatus'))
4      self.webserver.add_url_rule('/v1/service',
↪  view_func=Service.as_view('service'))
5      self.webserver.add_url_rule('/v1/nodes',
↪  view_func=Nodes.as_view('nodes'))

```

---

Listing 5.3: Implementation of all Flask API endpoints in motey

In line 2 a new endpoint will be add via the *add\_url\_rule* to the Flask webserver. The first parameter indicates the endpoint URL and the second parameter *view\_func* represents the Blueprint class, in this case *Capabilities*. To pass them over, the Blueprint has to be converted to a Flask view by using the *as\_view* method. The other endpoints are implemented equivalent.

**Logbook** is a small logging library that helps to standardize the output of log messages. It helps to address several output methods like the terminal, a file or even emails and linux desktop notifications. The style of the resulting message can be easily configured and it can be integrated into several other libraries. In addition to that, Logbook has a build-in support for messaging libraries like ZeroMQ, RabbitMQ or Redis. This allows to distribute log messages on heavily distributed systems like a huge node cluster. It was created by Armin Ronacher the crator of Flask and Georg Brandl the creator of Sphinx, both are tools that are used in motey. Unfortunately there is no build-in support in Flask yet. In the motey engine Logbook will be extended by a wrapper class to simplify the configuration of the tool. The output folder for the log messages can be configured via the global config file and will be loaded in the constructor of the wrapper class. If the folder path does not exist, it will be created.

**paho-mqtt** is the python implementation of the Eclipse paho<sup>1</sup> project that is basically the implementation of the MQTT messaging protocols, which was already described in section 2.4.1. The library allows to connect to a MQTT broker like the Mosquitto broker. It also comes with a variety of helper methods to eases the usage. A wrapper class to centralize the usage of the library was created and the configuration as well as some smaller improvements was made in this wrapper class. The whole configuration of the client can be configures via the global config file again. Furthermore the routes are managed in the wrapper and a after connect handler was implemented. It will be used to perform actions after a successfully created connection to the broker was made and all subscriptions to topics are done. This helps to realize the node discovery mechanism described in section 4.3.2.

**pyzmq** is the third important communication library. It is the official Python binding for ZeroMQ. A detailed description of ZeroMQ can be found in section 2.4.2 and in the great ZeroMQ guide at <http://zguide.zeromq.org/page:all>. This library is also abstracted by wrapper class in motey. This helps to configure the ZeroMQ server and register all necessary nodes. A detailed explaniation of the internals will be discussed in the following section 5.4.5.

**Sphinx** is a tool to autogenerate a documentation out of the source code documentation. It supports several output formats like Hypertext Markup Language (HTML), L<sup>A</sup>T<sub>E</sub>X or ePub and is the defacto standard in Python. The documentation hosting platform Read the Docs<sup>2</sup> completely supports Sphinx documentations. As mentioned before the Makefile in the docs folder will be used to autogenerate the documentation files. The scripts handles also the deployment of the documentation. Therefore the files will be generated, the current branch will be switched to *gh-pages*, which is be used to display the github page at <https://neoklosch.github.io/Motey/> and a new commit will be pushed with an autogenerated commit message. Finally the branch will be switched back again. Read the Docs has an active webhook that builds the builds the current documentation and display them at <http://motey.readthedocs.io>. The documentation is also used as the official github page of the project at <https://neoklosch.github.io/Motey>.

---

<sup>1</sup><http://www.eclipse.org/paho>

<sup>2</sup><http://readthedocs.org>

**TinyDB** is a wrapper to implement a lightweight document oriented database. It stores the data into single JSON files. The location can be configured via the global config file. TinyDB only supports very basic functionalities. For example it does not support indexes or relationships and it is not optimised concerning performance. But it is easy to use, has no execution overhead and it performs very well on smaller datasets. The main purpose of the library is to be used for small apps where database server like MySQL<sup>3</sup> or MongoDB<sup>4</sup> will be a huge overhead. Furthermore TinyDB has several extension to add more functionalities like indexing or caching. It also allows to easily extend the library with custom middlewares and extensions. In the motey engine, TinyDB is used in every *repository* to decorate the usage of the library. Thereby the used library can easily be replaced by a different one, without refactoring several classes in the project. A detailed description of the implementation will be shown in 5.4.2.

**Yapsy** is a plugin system that was designed to make an application easily extensible and should also be easy to use. Several plugin systems are too complicated for a basic usage or have a huge dependency overhead. Yapsy claims to be different, because it is written in pure Python and can be used with only a few lines of code. In the motey engine all VAL plugins will be loaded via Yapsy. An extract of the VALManager with the method to register the plugins, is shown in listing 5.4.

---

```
1  def register_plugins(self):
2      self.plugin_manager.setPluginPlaces(
3          directories_list=[absolute_file_path("motey/val/plugins")]
4      )
5      self.plugin_manager.collectPlugins()
6      for plugin in self.plugin_manager.getAllPlugins():
7          plugin.plugin_object.activate()
```

---

Listing 5.4: Extract of the VALManager with the method to register plugins

In motey there is a specific folder where all images have to be located (line 2). This could be extended in the future if necessary. Afterwards all the valid plugins will be loaded and activated (line 3). Finally for all activated plugins the *activate* method will be executed, which is a custom implementation to call some functions after activating a plugin (line 4 and 5). All plugins can be used via the *self.plugin\_manager*.

---

<sup>3</sup><https://www.mysql.com>

<sup>4</sup><https://www.mongodb.com>

## 5.4 Important Implementation Aspects



### 5.4.1 motey engine

### 5.4.2 Data layer

As mentioned before TinyDB is used as the database engine of choice. To abstract TinyDB from the rest of the source code, the repository pattern will be used. Each content type has its own database and also a related repository. Every repository is inheriting from a *base repository*. This repository is used to implement some default methods and will also create the database path in the constructor if it is necessary. The repositories are pretty similar implementation-wise. They only differ in using different models and have some specific methods to be executed. These models are used to represent the related JSON objects. Therefore each model have a static transform method to convert JSON objects to the related model. The models folder also contains a file called *schemas.py*. This file contains the validation schemas for the different YAML and JSON objects that could be received by the nodes. A library called *jsonschema* is used to validate the objects based on such a schema. An example for a schema is shown in listing 5.5.

---

```
1  capability_json_schema = {
2      "type": "array",
3      "items": {
4          "type": "object",
5          "properties": {
6              "capability": {
7                  "type": "string"
8              },
9              "capability_type": {
10                 "type": "string"
11             }
12         },
13         "required": ["capability", "capability_type"]
14     }
15 }
```

---

Listing 5.5: Capability JSON validation schema

The *jsonschema* library allows to validate the type of an entry (line 2, 7 and 10) and also if the fields are required or optional (line 13). This guarantees that only valid objects will be

processed.

Another data layer component is the configuration reader. This is implemented with the default Python *configparser*. The parsed configuration is only kept in memory. The configuration file for the whole project is stored in the *motey/configuration* folder and is called *config.ini*. Listing 5.6 show the sample content of that file.

---

```
1  [GENERAL]
2  app_name = Motey
3  pid = /var/run/motey.pid
4
5  [LOGGER]
6  name = Motey
7  log_path = /var/log/motey/
8  file_name = application.log
9
10 [WEBSERVER]
11 ip = 0.0.0.0
12 port = 5023
13
14 [MQTT]
15 ip = 172.18.0.3
16 port = 1883
17 keepalive = 60
18 username = neoklosch
19 password = neoklosch
20
21 [DATABASE]
22 path = /opt/Motey/motey/databases
23
24 [ZEROMQ]
25 capability_engine = 5090
26 capabilities_replier = 5091
27 deploy_image_replier = 5092
28 image_status_replier = 5093
29 image_terminate_replier = 5094
```

---

Listing 5.6: Example of the config.ini file

Different sections can be separated by squared brackets like *[GENERAL]* like on line 1. The entries are simple key-value pairs. Line 3 for example set the path to the used pid file. The usage of the configreader is shown in listing 5.7.

---

```
1  from motey.configuration.configreader import config
2
3  daemon = Daemonize(
4      app=config['GENERAL']['app_name'],
5      pid=config['GENERAL']['pid'],
6      action=run_main_component
7  )
```

---

Listing 5.7: Example of the usage of the configreader

The configuration object must be imported from the configreader module (see line 1) and can be used directly afterwards (line 4 and 5). Due to the implementation of the import logic in Python, the containing script will be executed only once, regardless how many files import that module.

### 5.4.3 Orchestration layer



### 5.4.4 Virtualization layer



### 5.4.5 Communication layer

As mentioned in section 4.3.2 the communication layer is splitted up into three different components as is decorated by an extra layer called *CommunicationManager*. The important implementation details of all of them will be described in this subsection. All the necessary communication components are located in the *motey/communication* folder.

**APIServer** This server is responsible for the REST API. Therefore the Flask server will be instantiated and configured in the constructor of the wrapper class. The server will be executed in a separate thread due to the nature of a webserver to block the main thread because the it will run endless to receive all incoming requests. If it would not be implemented with a thread only the Flask server would be started and the following code would be blocked. Futhermore Flask has to be configured to accept cross-site requests, by disabeling

the *same origin policy* with a *Cross-Origin Resource Sharing (CORS)* library. This behavior is a development only feature and it is strictly recommend to deactivate it in production mode. By deactivating it the server is vulnerable for Cross-Site Request Forgery (CSRF) and clickjacking attacks. In the development phase cross-site requests should be allowed to make it easier to communicate between a web client and the REST API.

In addition all the configured API will be initialized. As mentioned before these routes can be implemented as Flask Blueprints. All routes are located in the *motey/communication/api\_routes* directory.

There are four different routes:

- The **Capabilities** Blueprint which is used to send the capabilities of the node, add new capabilities or to remove them. The HTTP verb *GET* is used to deliver all existing capabilities. If a request is received, the *CapabilityRepository* will be used to fetch all capabilities and then they will be converted to a JSON string afterwards. The HTTP verb *PUT* will add new entries to the repository. After the JSON request will be received, the content will be parsed and validated with the corresponding JSON schema. If it is not valid or the content type of the request is not *application/json* a HTTP status code 400 is returned. Otherwise the capabilities will be added via the *CapabilityRepository* to the database. This will end up in the HTTP status code 201. The same logic will be used for the *DELETE* request.
- The second endpoint is implemented as the **Nodes** Blueprint. The only functionality is to respond with all stored nodes as JSON. This is used for testing purposes and could also be helpful for maintaining the cluster.
- To get some information about the node health status the **NodeStatus** Blueprint was created. It respond with some hardware informations like the current CPU or memory usage. This is also useful for maintaining the nodes.
- The last Blueprint implementation is the **Service** endpoint. It is used to get a JSON list with all stored services via the HTTP *GET* verb and also to deploy and remove services. Therefore the *POST* or *DELETE* verb is used. Both implementations are pretty similar. Also in this case the provided YAML file will be validated. If it is valid the parsed service will be handed over to the orchestration layer and a 201 will be returned to the client. If something went wrong a 400 will be returned.

**MQTTServer** The purpose of using MQTT in the motey engine is the node discovery. Section 4.3.2 describes the basic idea of it. To implement the logic the node must have knowledge about the IP and port of the MQTT broker as well as the authentication credentials if they are required. They can be configured via the global configuration file. As all the other classes, the *MQTTServer* is a wrapper class for the Python MQTT library. In the constructor the routes will be defined as well as some callbacks and the client will be configured. The *start* method connects the client to the broker and execute the request loop. That is pretty similar to the implementation of the *APIServer*. Therefore the MQTT client has to be executed in a separate thread too.



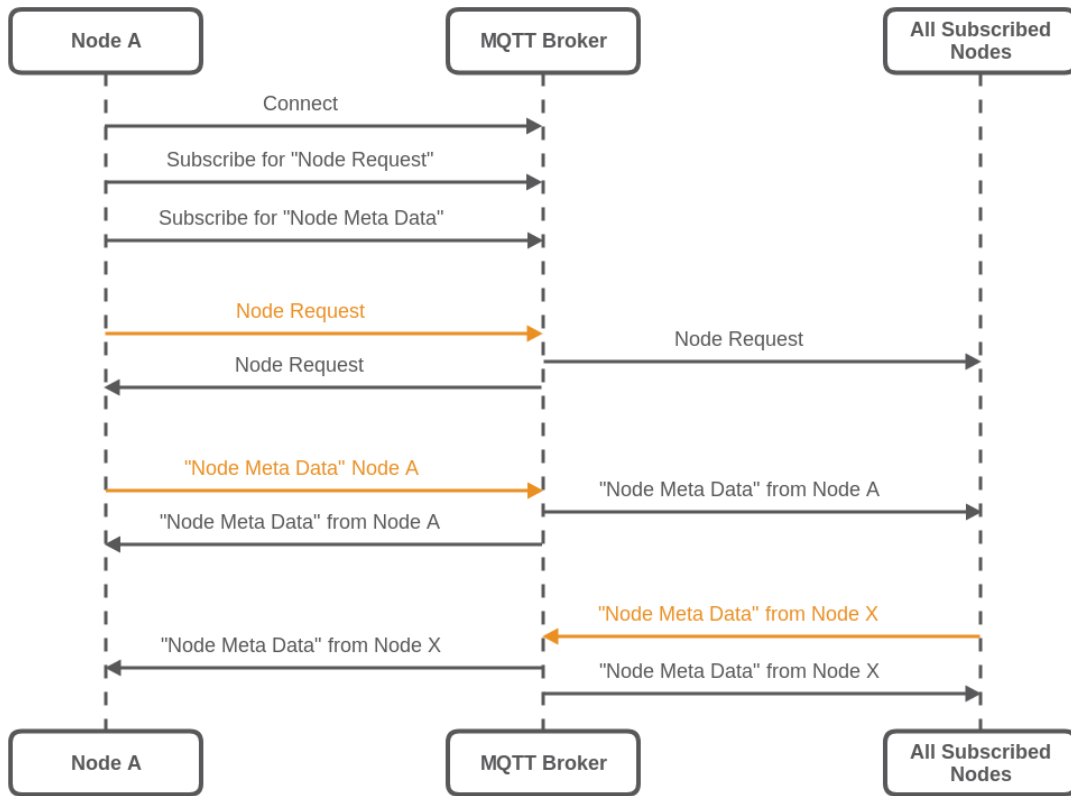


Figure 15: Node discovery sequence diagram

Figure 15 shows how the node discovery will be implemented. Important aspect is that the sender node is also part of the subscribed nodes. This means after the *connection* to the broker is established and the client is subscribed to the topics, each *Node Request* will also be received by the sender himself. Benefit out of it, is that beside the fact that a new registered node gets all meta informations from all other nodes, also these nodes get the meta information of the new node. In this way each node has knowledge of all the other nodes and can keep track of them. That is also the reason why the *"Node Meta Data" from Node A* and *"Node Meta Data" from Node X* are duplicated in figure 15. Beside that the procedure is straight forward: At first one node send out a *Node Request*. Each subscribed node will get it and send out a response with the *Node Meta Data* to all the other nodes via the broker. The *after\_connect* handler will be used to send out the *Node Request* after a new nodes is sucessfully subscribed to the broker. Before a node disconnects, a *Remove Node* request will be send out, that will inform each node that a specific node will be disappear. All the nodes react to this by removing the meta data about this node from the database.

**ZeroMQServer** Section 2.4.2 and 4.3.2 gave a detailed overview about ZeroMQ and how does it work. Now the concrete implementation will be discussed. The wrapper class *ZeroMQServer* binds multiple sockets to the related ports. There are four sockets binded for the direct node-to-node communication via TCP and one port to connect third party applications to the motey engine. The latter is used to add or remove capabilities on a node. ZeroMQ provides an IPC protocol for such a use case. The ZeroMQServer will bind a socket with the Publish-Subscribe pattern that allows multiple publisher to connect to the endpoint. Two

important aspects have to be considered by using the Publish-Subscribe pattern in ZeroMQ. As in MQTT each subscription has to be done to a topic. Listing 5.8 show the subscription for the *capabilityevent* at line 3. This also means that it is possible to send multiple different events to a single socket endpoint. In motey this feature is not used yet, but nevertheless it is necessary to subscribe to a topic because of the implementation specification of ZeroMQ. Without that, the subscriber will receive nothing.

---

```

1  def start(self):
2      self.capabilities_subscriber.bind('ipc://*:%s' %
↪   config['ZEROMQ']['capability_engine'])
3      self.capabilities_subscriber.setsockopt_string(zmq.SUBSCRIBE,
↪   'capabilityevent')
4      # [...]
5
6  def __run_capabilities_subscriber_thread(self):
7      while not self.stopped:
8          result = self.capabilities_subscriber.recv_string()
9          topic, output = result.split('#', 1)
10         self.capability_event_stream.on_next(output)

```

---

Listing 5.8: Example of the usage of the configreader

The second important aspect is at line 9. An incoming message has always been parsed for a delemiter. The reason for that is, that the topic, in this case *capabilityevent* have to be prepend to the message followed by the delimeter. Listing 5.9 show such a message.

---

```

1  capabilityevent#{'capability': 'zigbee', 'capability_type': 'hardware'}

```

---

Listing 5.9: Example ZeroMQ capability event message

Therefore the topics and the delimiter has to be removed before the message can be parsed. The other four sockets are implemented with the Request-Reply pattern and are used to:

- reply to a capability request. This is used by the *inter\_node\_orchestrator* to get the capabilities of other nodes. The result is send as a JSON string. If there are no capabilities an empty JSON array will be send.
- deploy images is also used by the *inter\_node\_orchestrator* to deploy a single image to another node. The image model will be transformed to a JSON object and send over as a string and vice versa and passed over to the *VALManager* if received.
- return the status of an image. **write after implemented**
- terminate an existing image instance. Only the image id has to be send to perform that action. The *VALManager* will handle the termination of the instance.

Important aspect while using the Request-Reply pattern, there can only be one connection established at the same time. In addition a reply must send by the consumer after a request was receive. As long as there was no message send back, the connection will be blocked and the consumer can not recevie any new messages.

As discussed by the other servers, also this one have to be executed in threads. Difference here is that each socket has its own thread. This is necessary because each connection waits for a request and has its own request loop. Therefore each loop would block the main thread.

**CommunicationManager** Finally the *CommunicationManager* is used to decorate the servers from the rest of the source code. This is helpful for decoupling the components as well as replace or add a new communication component. Beside that the manager simply forward the methods to the specific server. It is also used as a central place to start and stop all servers.

#### 5.4.6 Capability management

The main components of the capability management are the *CapabilityEngine* and the *ZeroMQServer*. The latter was descibed in the previous section.

#### 5.4.7 User interface



### 5.5 Conclusion



## Chapter 6


# Evaluation

In this chapter the implementation of the plugins, based on the previously defined requirements and concepts, are evaluated. Afterwards a demonstration of the system will be shown.


### 6.1 Test Environment



### 6.2 Experimental Validation



### 6.3 Performance Evaluation



## 6.4 Observational Validation



## 6.5 Deployments



## 6.6 Code Verification



## 6.7 Comparative Analysis




## 6.8 Conclusion




## Chapter 7


# Conclusion



### 7.1 Summary




### 7.2 Dissemination



### 7.3 Impact



### 7.4 Outlook





## Acronyms

<b>AE</b>	Autoscaling Engine
<b>AMQP</b>	Advanced Message Queuing Protocol
<b>API</b>	Application Programming Interface
<b>BSS</b>	Business Support Systems
<b>CapEx</b>	Capital Expenditure
<b>CI</b>	Continuous Integration
<b>CLI</b>	Command Line Interface
<b>CORS</b>	Cross-Origin Resource Sharing
<b>CPU</b>	Central Processing Unit
<b>CPS</b>	Cyber-Physical System
<b>CSRF</b>	Cross-Site Request Forgery
<b>CS</b>	Cyber System
<b>DI</b>	Dependency Injection
<b>EPGM</b>	Encapsulated Pragmatic General Multicast
<b>EMS</b>	Element Management System
<b>ETSI</b>	European Telecommunications Standards Institute
<b>FM</b>	Fault Management
<b>FOKUS</b>	Fraunhofer-Institut für Offene Kommunikationssysteme
<b>GUI</b>	Graphical User Interface
<b>H2H</b>	Human-to-Human
<b>H2M</b>	Human-to-Machine
<b>HATEOAS</b>	Hypermedia As The Engine Of Application State
<b>HTML</b>	Hypertext Markup Language
<b>HTTP</b>	Hypertext Transfer Protocol
<b>IDE</b>	Integrated Development Environment
<b>IERC</b>	European Research Cluster on the Internet of Things
<b>IoC</b>	Inversion of Control
<b>IoS</b>	Internet of Services
<b>IoT</b>	Internet of Things
<b>IP</b>	Internet Protocol
<b>IPC</b>	Inter-Process Communication
<b>IT</b>	Information Technology
<b>JSON</b>	JavaScript Object Notation
<b>JVM</b>	Java Virtual Machine
<b>LXC</b>	Linux Containers
<b>M2M</b>	Machine-to-Machine
<b>MANO</b>	Management And Orchestration
<b>MQTT</b>	Message Queue Telemetry Transport
<b>NF</b>	Network Function
<b>NFV</b>	Network Function Virtualisation
<b>NFVI</b>	Network Function Virtualization Infrastructure
<b>NFV-MANO</b>	Network Function Virtualisation Management And Orchestration
<b>NFVO</b>	Network Function Virtualisation Orchestrator
<b>NIST</b>	National Institute of Standards and Technology
<b>OASIS</b>	Organization for the Advancement of Structured Information Standards
<b>OpEx</b>	Operating Expense

<b>OS</b>	Operating System
<b>OSS</b>	Operations Support Systems
<b>PGM</b>	Pragmatic General Multicast
<b>PNF</b>	Physical Network Function
<b>PoP</b>	Point of Presence
<b>QoS</b>	Quality of Service
<b>RAM</b>	Random Access Memory
<b>REST</b>	Representational State Transfer
<b>RFID</b>	Radio Frequency Identification
<b>SDK</b>	Software Development Kit
<b>SDN</b>	Software Defined Networking
<b>SSL</b>	Secure Sockets Layer
<b>TCP</b>	Transmission Control Protocol
<b>TLS</b>	Transport Layer Security
<b>TOSCA</b>	Topology and Orchestration Specification for Cloud Applications
<b>UI</b>	User Interface
<b>URL</b>	Uniform Resource Locator
<b>VAL</b>	Virtualization Abstraction Layer
<b>VIM</b>	Virtual Infrastructure Manager
<b>VM</b>	Virtual Machine
<b>VMM</b>	Virtual Machine Monitor
<b>VNF</b>	Virtual Network Function
<b>VNFM</b>	Virtual Network Function Manager
<b>YAML</b>	YAML Ain't Markup Language

## Glossary

Algorithmus a

Chiffrierung a

Dechiffrierung a

# Bibliography

- [1] A. Bosche, D. Crawford, D. Jackson, M. Schallehn, and P. Smith. *How Providers Can Succeed in the Internet of Things*. Accessed: 2017-02-20. Aug. 2016. URL: <http://bain.com/publications/articles/how-providers-can-succeed-in-the-internet-of-things.aspx> (cit. on p. 1).
- [2] E. A. Lee. “Cyber Physical Systems: Design Challenges”. In: *2008 11th IEEE International Symposium on Object and Component-Oriented Real-Time Distributed Computing (ISORC)*. May 2008, pp. 363–369. DOI: 10.1109/ISORC.2008.25 (cit. on p. 1).
- [3] R. Poovendran. “Cyber Physical Systems: Close Encounters Between Two Parallel Worlds”. In: *Proceedings of the IEEE* 98.8 (Aug. 2010), pp. 1363–1366. ISSN: 0018-9219. DOI: 10.1109/JPROC.2010.2050377 (cit. on pp. 1, 8).
- [4] C. Pahl and B. Lee. “Containers and Clusters for Edge Cloud Architectures – A Technology Review”. In: *2015 3rd International Conference on Future Internet of Things and Cloud*. Aug. 2015, pp. 379–386. DOI: 10.1109/FiCloud.2015.35 (cit. on pp. 1, 10, 13).
- [5] M. S. D. Brito, S. Hoque, R. Steinke, and A. Willner. “Towards Programmable Fog Nodes in Smart Factories”. In: *2016 IEEE 1st International Workshops on Foundations and Applications of Self\* Systems (FAS\*W)*. Sept. 2016, pp. 236–241. DOI: 10.1109/FAS-W.2016.57 (cit. on pp. 1, 6, 8).
- [6] M. Yannuzzi, R. Milito, R. Serral-Gracià, D. Montero, and M. Nemirovsky. “Key ingredients in an IoT recipe: Fog Computing, Cloud computing, and more Fog Computing”. In: *2014 IEEE 19th International Workshop on Computer Aided Modeling and Design of Communication Links and Networks (CAMAD)*. Dec. 2014, pp. 325–329. DOI: 10.1109/CAMAD.2014.7033259 (cit. on pp. 2, 8).
- [7] C. Pahl, S. Helmer, L. Miori, J. Sanin, and B. Lee. “A Container-Based Edge Cloud PaaS Architecture Based on Raspberry Pi Clusters”. In: *2016 IEEE 4th International Conference on Future Internet of Things and Cloud Workshops (FiCloudW)*. Aug. 2016, pp. 117–124. DOI: 10.1109/W-FiCloud.2016.36 (cit. on p. 2).
- [8] D. Evans. *The Internet of Things: How the Next Evolution of the Internet Is Changing Everything*. Tech. rep. Accessed: 2017-02-12. Cisco Internet Business Solutions Group (IBSG), Apr. 2011. URL: [http://www.cisco.com/c/dam/en\\_us/about/ac79/docs/innov/IoT\\_IBSG\\_0411FINAL.pdf](http://www.cisco.com/c/dam/en_us/about/ac79/docs/innov/IoT_IBSG_0411FINAL.pdf) (cit. on p. 5).
- [9] J. Rui and S. Danpeng. “Architecture Design of the Internet of Things Based on Cloud Computing”. In: *2015 Seventh International Conference on Measuring Technology and Mechatronics Automation*. June 2015, pp. 206–209. DOI: 10.1109/ICMTMA.2015.57 (cit. on pp. 5, 6).
- [10] T. Kramp, R. van Kranenburg, and S. Lange. “Introduction to the Internet of Things”. In: *Enabling Things to Talk*. Vol. 1. Springer-Verlag Berlin Heidelberg, 2013, pp. 1–10. ISBN: 978-3-642-40402-3. DOI: 10.1007/978-3-642-40403-0 (cit. on pp. 5, 6).

- [11] *ITU Internet Reports: The Internet of Things*. Tech. rep. Accessed: 2017-02-12. International Telecommunication Union, Nov. 2005. URL: <https://www.itu.int/net/wsis/tunis/newsroom/stats/The-Internet-of-Things-2005.pdf> (cit. on p. 5).
- [12] M. Weiser. *The Computer for the 21st Century*. Accessed: 2017-02-12. Sept. 1991. URL: <http://www.ubiq.com/hypertext/weiser/SciAmDraft3.html> (cit. on p. 6).
- [13] M. Lom, O. Pribyl, and M. Svitek. “Industry 4.0 as a part of smart cities”. In: *2016 Smart Cities Symposium Prague (SCSP)*. May 2016, pp. 1–6. DOI: 10.1109/SCSP.2016.7501015 (cit. on pp. 6, 8).
- [14] M. Hermann, T. Pentek, and B. Otto. *Design Principles for Industrie 4.0 Scenarios: A Literature Review*. Tech. rep. Accessed: 2017-02-12. Technische Universität Dortmund - Fakultät Maschinenbau, Jan. 2015. URL: [http://www.thiagobranquinho.com/wp-content/uploads/2016/11/Design-Principles-for-Industrie-4\\_0-Scenarios.pdf](http://www.thiagobranquinho.com/wp-content/uploads/2016/11/Design-Principles-for-Industrie-4_0-Scenarios.pdf) (cit. on pp. 6, 7).
- [15] B. Lydon. “Industry 4.0: Intelligent and flexible production”. In: *InTech Magazine* (May 2016). Accessed: 2017-02-13. URL: <https://www.isa.org/intech/20160601/> (cit. on pp. 6, 7).
- [16] *Dienstleistungspotenziale im Rahmen von Industrie 4.0*. Tech. rep. Accessed: 2017-02-12. vbw Vereinigung der Bayerischen Wirtschaft e. V., Mar. 2014. URL: <http://www.forschungsnetzwerk.at/downloadpub/dienstleistungspotenziale-industrie-4.0-mar-2014.pdf> (cit. on p. 7).
- [17] O. Jurevicius. *Vertical Integration*. Accessed: 2017-02-13. Apr. 2013. URL: <https://www.strategicmanagementinsight.com/topics/vertical-integration.html> (cit. on p. 7).
- [18] K. Scarfone, M. Souppaya, and P. Hoffman. *Guide to Security for Full Virtualization Technologies*. Tech. rep. Accessed: 2017-02-19. National Institute of Standards and Technology, Jan. 2011. URL: <http://nvlpubs.nist.gov/nistpubs/Legacy/SP/nistspecialpublication800-125.pdf> (cit. on p. 9).
- [19] A. Celesti, D. Mulfari, M. Fazio, M. Villari, and A. Puliafito. “Exploring Container Virtualization in IoT Clouds”. In: *2016 IEEE International Conference on Smart Computing (SMARTCOMP)*. May 2016, pp. 1–6. DOI: 10.1109/SMARTCOMP.2016.7501691 (cit. on pp. 9, 10).
- [20] S. Gallagher. *Mastering Docker*. Packt Publishing Ltd., Dez 2015. ISBN: 978-1-78528-703-9 (cit. on pp. 10, 15).
- [21] A. Tosatto, P. Ruiiu, and A. Attanasio. “Container-Based Orchestration in Cloud: State of the Art and Challenges”. In: *2015 Ninth International Conference on Complex, Intelligent, and Software Intensive Systems*. July 2015, pp. 70–75. DOI: 10.1109/CISIS.2015.35 (cit. on pp. 10, 13).
- [22] J. Anderson, H. Hu, U. Agarwal, C. Lowery, H. Li, and A. Apon. “Performance considerations of network functions virtualization using containers”. In: *2016 International Conference on Computing, Networking and Communications (ICNC)*. Feb. 2016, pp. 1–7. DOI: 10.1109/ICCNC.2016.7440668 (cit. on p. 10).
- [23] *Network Function Virtualisation (NFV); Architectural Framework*. Tech. rep. Accessed: 2017-02-27. ETSI - European Telecommunications Standards Institute, Oct. 2013. URL: [http://www.etsi.org/deliver/etsi\\_gs/nfv/001\\_099/002/01.01.01\\_60/gs\\_nfv002v010101p.pdf](http://www.etsi.org/deliver/etsi_gs/nfv/001_099/002/01.01.01_60/gs_nfv002v010101p.pdf) (cit. on p. 11).
- [24] L. Rivenes. *What is Network Function Virtualization (NFV)?* Accessed: 2017-03-03. Sept. 2014. URL: <https://datapath.io/resources/blog/network-function-virtualization-nfv> (cit. on p. 11).

- [25] S. Noble. *Network Function Virtualization or NFV Explained*. Accessed: 2017-03-03. Apr. 2015. URL: <http://wikibon.com/network-function-virtualization-or-nfv-explained> (cit. on pp. 11, 12).
- [26] *NFV*. Accessed: 2017-03-19. URL: <https://sdn-wiki.fokus.fraunhofer.de/doku.php?id=nfv> (cit. on p. 11).
- [27] F. Kahn. *Kubernetes User Case Studies*. Accessed: 2017-03-19. Mar. 2015. URL: <http://www.telecomlighthouse.com/a-cheat-sheet-for-understanding-nfv-architecture> (cit. on pp. 12, 13).
- [28] *Why is TOSCA Relevant to NFV? Explanation*. Accessed: 2017-03-19. URL: <https://www.sdxcentral.com/nfv/definitions/tosca-nfv-explanation> (cit. on pp. 12, 13).
- [29] *Understand images, containers, and storage drivers - Docker*. <https://docs.docker.com/engine/userguide/storagedriver/imagesandcontainers/>. Accessed: 2017-02-24 (cit. on p. 14).
- [30] *Docker Overview - Docker*. <https://docs.docker.com/engine/understanding-docker/>. Accessed: 2017-02-24 (cit. on p. 14).
- [31] B. Grant. *Kubernetes: a platform for automating deployment, scaling, and operations*. Accessed: 2017-02-27. Nov. 2015. URL: <https://www.slideshare.net/BrianGrant11/wso2con-us-2015-kubernetes-a-platform-for-automating-deployment-scaling-and-operations> (cit. on p. 15).
- [32] J. MSV. *Kubernetes architecture*. Accessed: 2017-03-03. Oct. 2016. URL: <https://www.slideshare.net/janakiramm/kubernetes-architecture> (cit. on pp. 15, 16).
- [33] E. Mulyana. *Kubernetes Basics*. Accessed: 2017-03-03. May 2016. URL: <https://www.slideshare.net/e2m/kubernetes-basics> (cit. on pp. 15, 16).
- [34] *Pods - Kubernetes*. Accessed: 2017-03-03. Dec. 2016. URL: <https://kubernetes.io/docs/user-guide/pods> (cit. on p. 15).
- [35] *Labels and Selectors - Kubernetes*. Accessed: 2017-03-03. Dec. 2016. URL: <https://kubernetes.io/docs/user-guide/labels> (cit. on p. 16).
- [36] *kube-proxy - Kubernetes*. Accessed: 2017-03-03. Dec. 2016. URL: <https://kubernetes.io/docs/admin/kube-proxy> (cit. on p. 16).
- [37] *Replication Controller - Kubernetes*. Accessed: 2017-03-03. Dec. 2016. URL: <https://kubernetes.io/docs/user-guide/replication-controller> (cit. on p. 16).
- [38] *Rolling Updates - Kubernetes*. Accessed: 2017-03-03. Dec. 2016. URL: <https://kubernetes.io/docs/user-guide/rolling-updates> (cit. on p. 16).
- [39] *Docker Swarm Documentation*. <https://docs.docker.com/engine/swarm>. Accessed: 2017-03-18 (cit. on p. 16).
- [40] *OpenBaton Documentation*. <http://openbaton.github.io/documentation>. Accessed: 2017-03-18 (cit. on pp. 16–18).
- [41] *FAQ - Frequently Asked Questions / MQTT*. Accessed: 2017-06-03. URL: <http://mqtt.org/faq> (cit. on p. 18).
- [42] V. Lampkin, W. Leong, L. Olivera, S. Rawat, N. Subrahmanyam, R. Xiang, G. Kallas, N. Krishna, S. Fassmann, M. Keen, et al. *Building Smarter Planet Solutions with MQTT and IBM WebSphere MQ Telemetry*. IBM redbooks. IBM Redbooks, 2012. ISBN: 9780738437088. URL: [https://books.google.de/books?id=F\\_HHAgAAQBAJ](https://books.google.de/books?id=F_HHAgAAQBAJ) (cit. on p. 18).
- [43] T. Bayer. *MQTT, Einführung in das Protokoll für M2M und IoT*. Accessed: 2017-06-03. Mar. 2016. URL: <https://www.predic8.de/mqtt.htm> (cit. on pp. 18–20).

- [44] *ØMQ - The Guide*. Accessed: 2017-06-06. URL: <http://zguide.zeromq.org/page:all> (cit. on pp. 20–23).
- [45] *zmq\_inproc(7) - ØMQ Api*. Accessed: 2017-06-06. URL: <http://api.zeromq.org/3-2:zmq-inproc> (cit. on p. 20).
- [46] *zmq\_tcp(7) - ØMQ Api*. Accessed: 2017-06-06. URL: <http://api.zeromq.org/3-2:zmq-tcp> (cit. on p. 20).
- [47] *zmq\_pgm(7) - ØMQ Api*. Accessed: 2017-06-06. URL: <http://api.zeromq.org/3-2:zmq-pgm> (cit. on p. 20).
- [48] T. K. Authors. *A Cheat Sheet for Understanding “NFV Architecture”*. Accessed: 2017-04-10. URL: <https://kubernetes.io/case-studies> (cit. on p. 25).
- [49] G. Technologies. *Orchestration-First, Model-Driven NFV Cloud Management*. Accessed: 2017-04-14. URL: <http://getcloudify.org/network-function-virtualization-vnf-nfv-orchestration-sdn-platform.html> (cit. on p. 26).
- [50] *Most Used Programming Languages 2017: The Trendiest & Most Sought After Coding Languages*. Accessed: 2017-06-16. URL: <https://stackify.com/trendiest-programming-languages-hottest-sought-programming-languages-2017> (cit. on pp. 28, 29).
- [51] *Python Garbage Collection - Digi Developer*. Accessed: 2017-06-17. URL: [https://www.digi.com/wiki/developer/index.php/Python\\_Garbage\\_Collection](https://www.digi.com/wiki/developer/index.php/Python_Garbage_Collection) (cit. on p. 29).
- [52] B. Peterson. *Python 2.7 Release Schedule*. Accessed: 2017-06-17. June 2016. URL: <http://legacy.python.org/dev/peps/pep-0373> (cit. on p. 29).
- [53] *Documentation - The Go Programming Language*. Accessed: 2017-06-16. URL: <https://golang.org/doc> (cit. on p. 29).
- [54] *Eclipse Mosquitto*. Accessed: 2017-06-15. URL: <https://projects.eclipse.org/projects/technology.mosquitto> (cit. on p. 32).
- [55] *Foreword - Flask Documentation*. Accessed: 2017-06-18. URL: <http://flask.pocoo.org/docs/0.12/foreword> (cit. on p. 38).
- [56] *Steve Cohen’s answer to What challenges has Pinterest encountered with Flask?* - Quora. Accessed: 2017-06-18. URL: <https://www.quora.com/What-challenges-has-Pinterest-encountered-with-Flask/answer/Steve-Cohen> (cit. on p. 38).
- [57] *Introducing Flask-RESTful*. Accessed: 2017-06-18. URL: <https://www.twilio.com/engineering/2012/10/18/open-sourcing-flask-restful> (cit. on p. 38).

