


NOTES:


- 1. REFERENCE CAD MODEL "APEX STANDARD V0.6.STEP" FOR ANY DIMENSIONS REFERENCED BY DRAWING CALLOUTS BUT NOT DIRECTLY INDICATED.
- 2. ANY DIMENSIONS NOT SHOWN AND WITHOUT TOLERANCES OR CALLOUTS APPLIED ARE NOT CONTROLLED BY THE APEX STANDARD.

CARRIER (HOST) SIDE



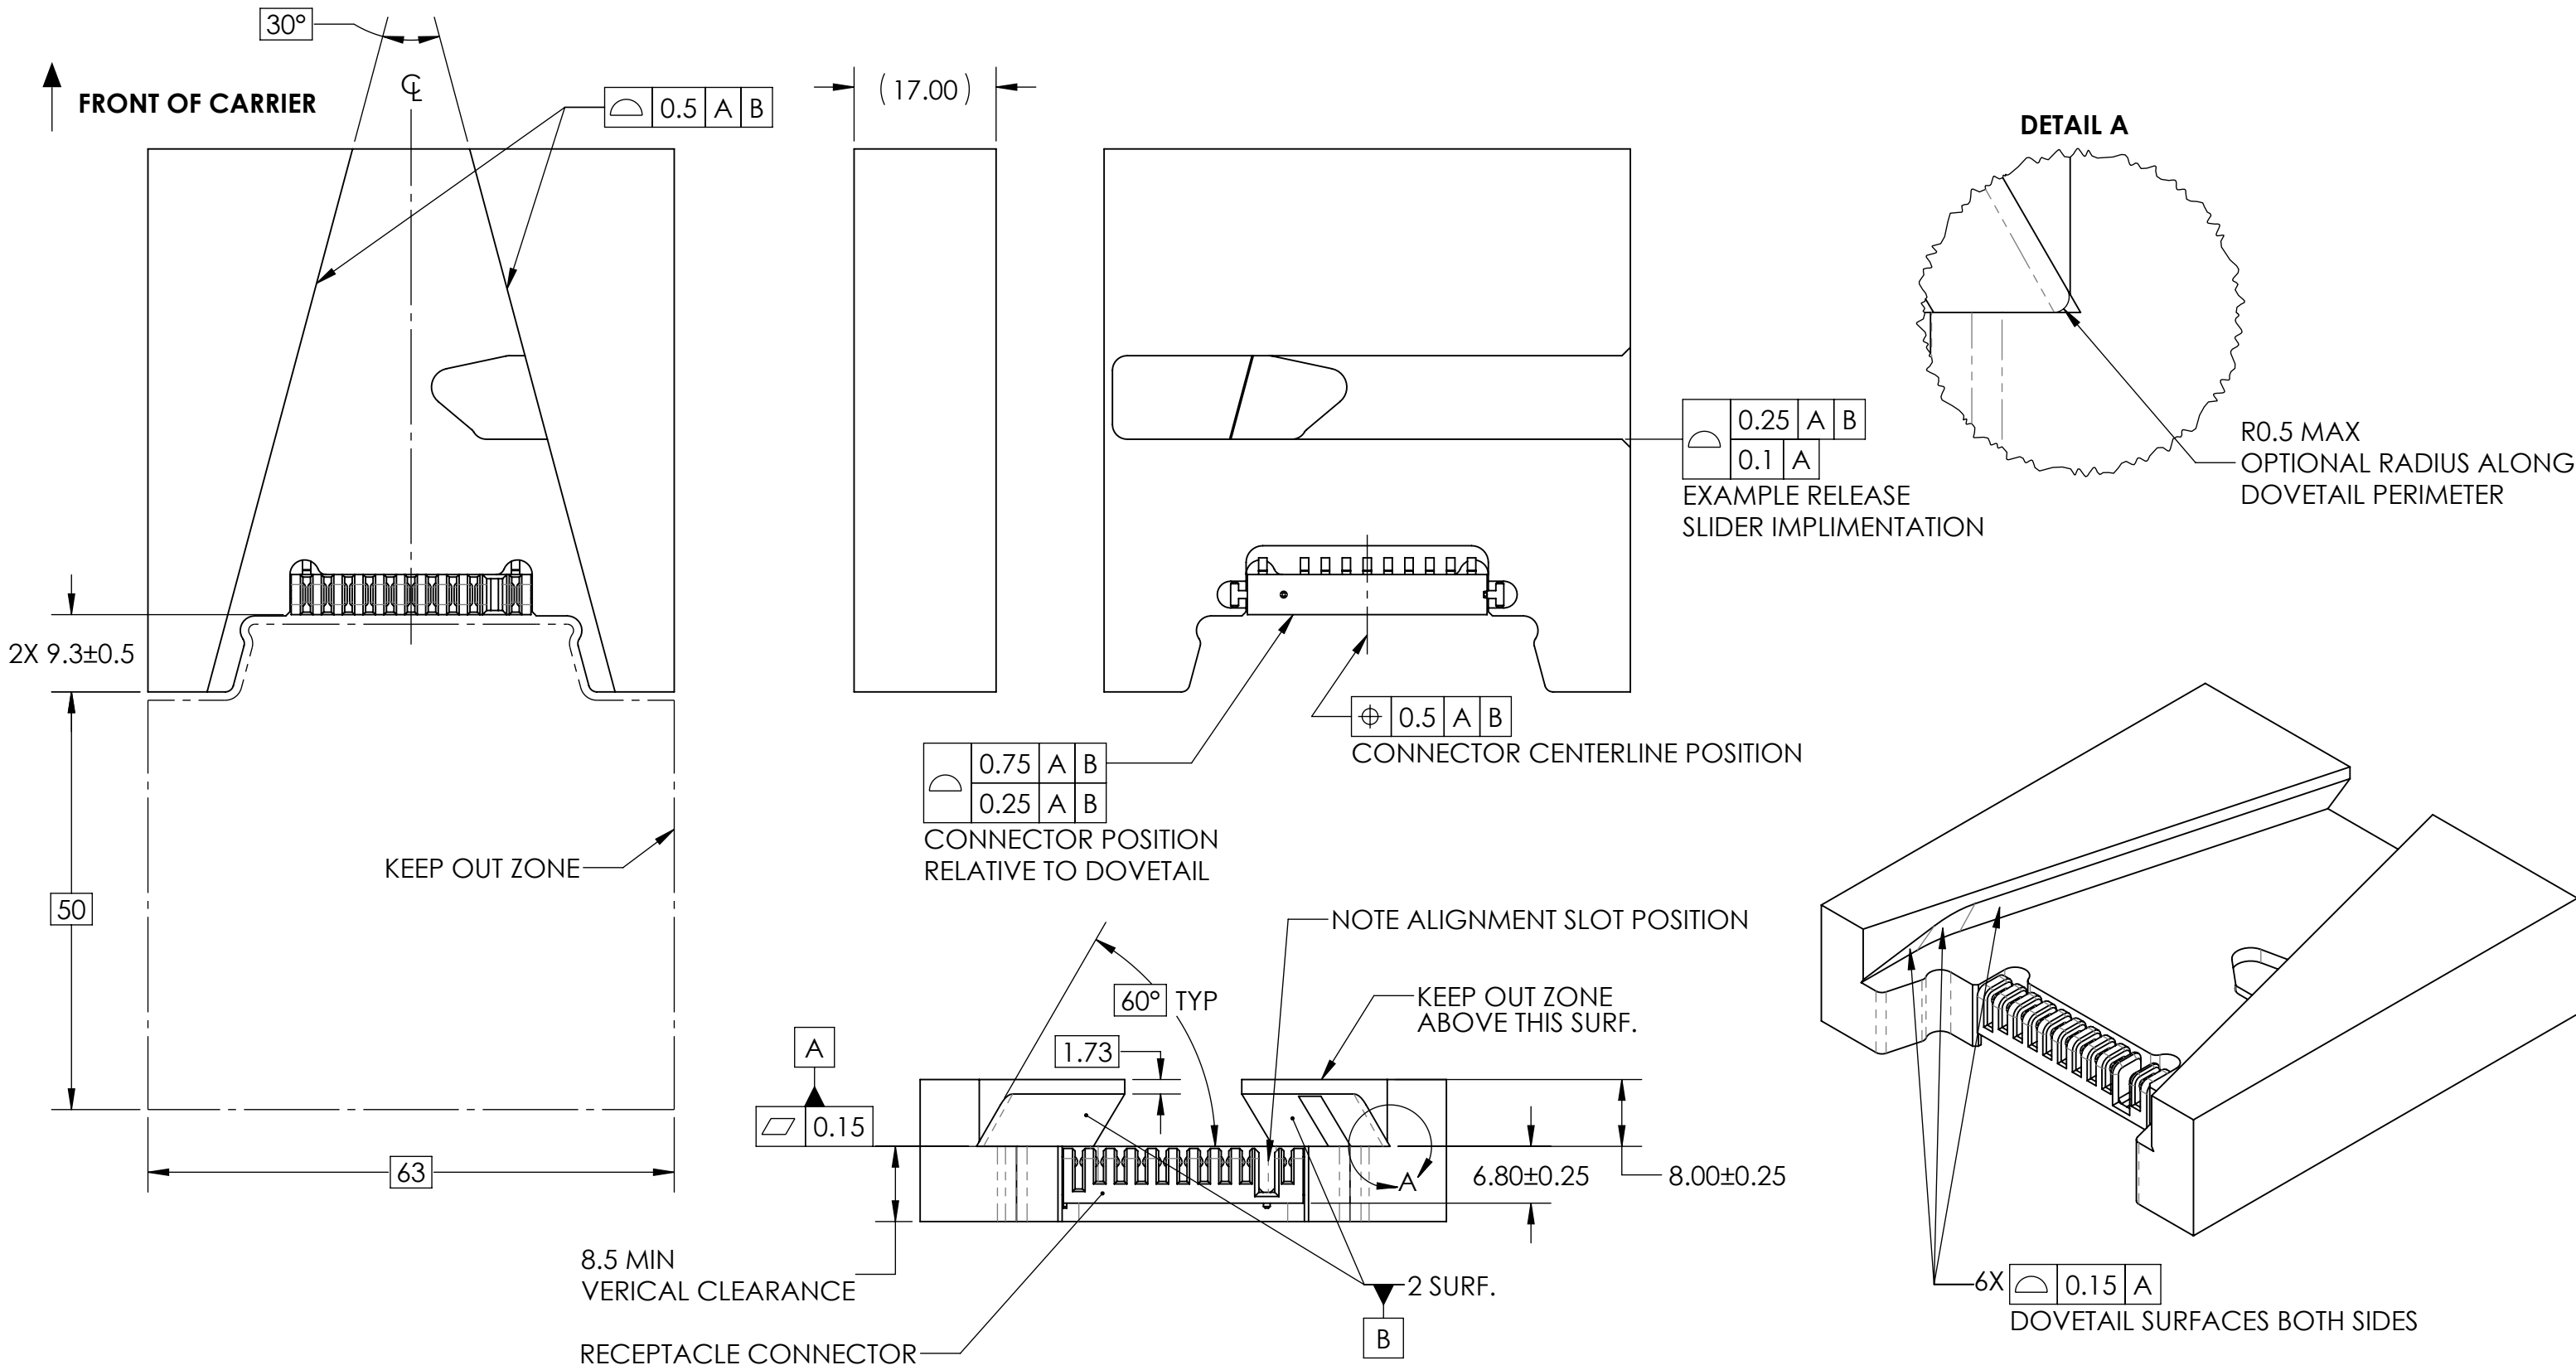


4.25±0.5 OVERTRAVEL CLEARANCE
FROM NOMINAL PAYLOAD CONTACT POINT


9.4 MIN SLIDER TRAVEL IN RELEASE DIRECTION
FROM NOMINAL PAYLOAD CONTACT POINT

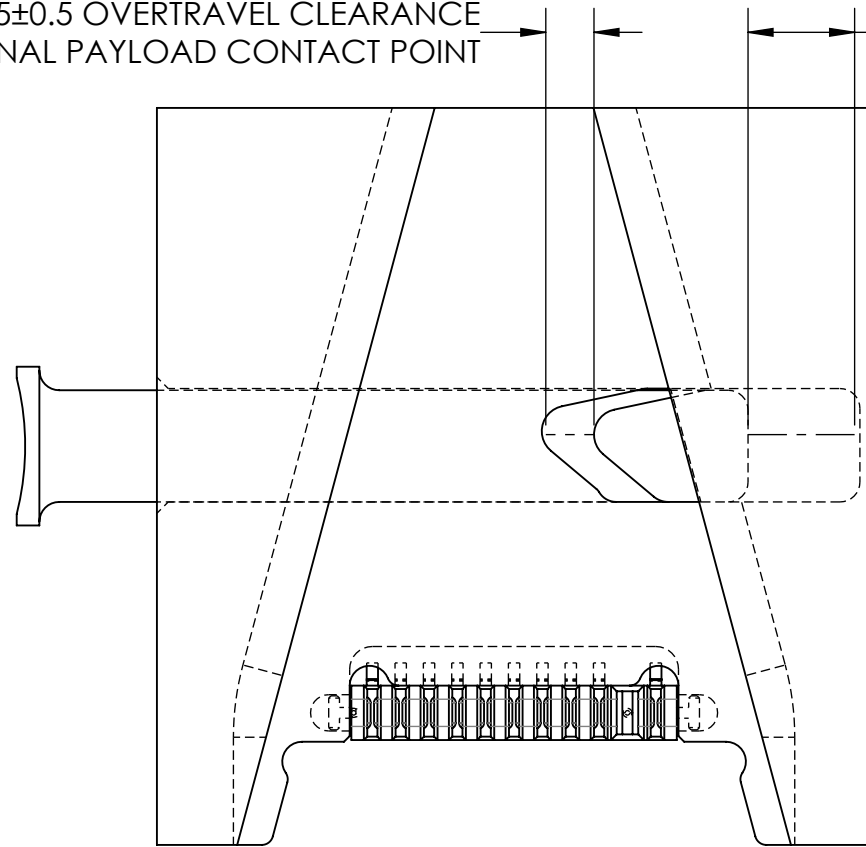

CAD MODEL SHOWS SLIDER AT NOMINAL
PAYLOAD CONTACT POINT

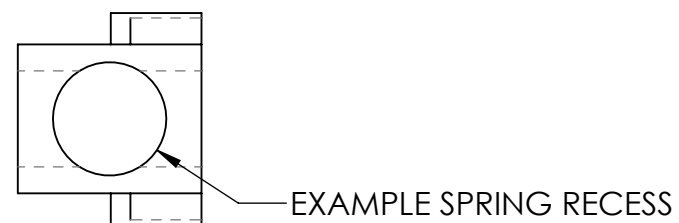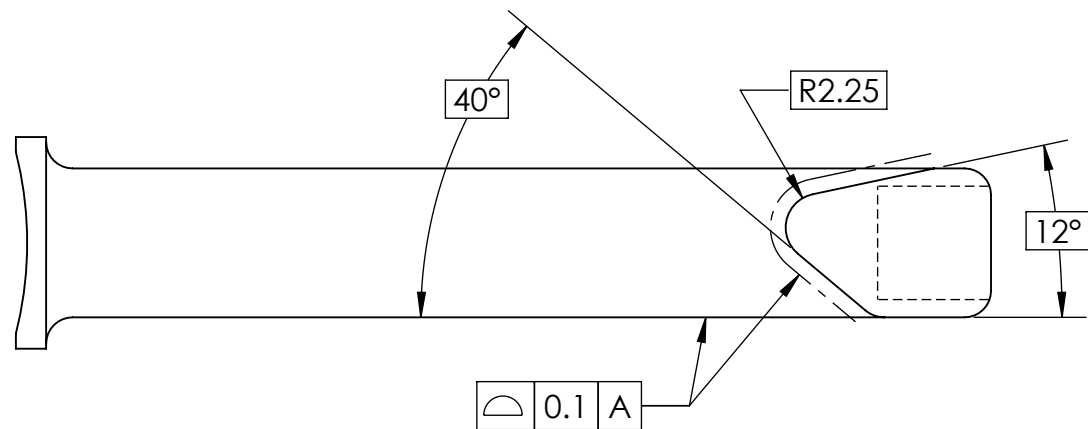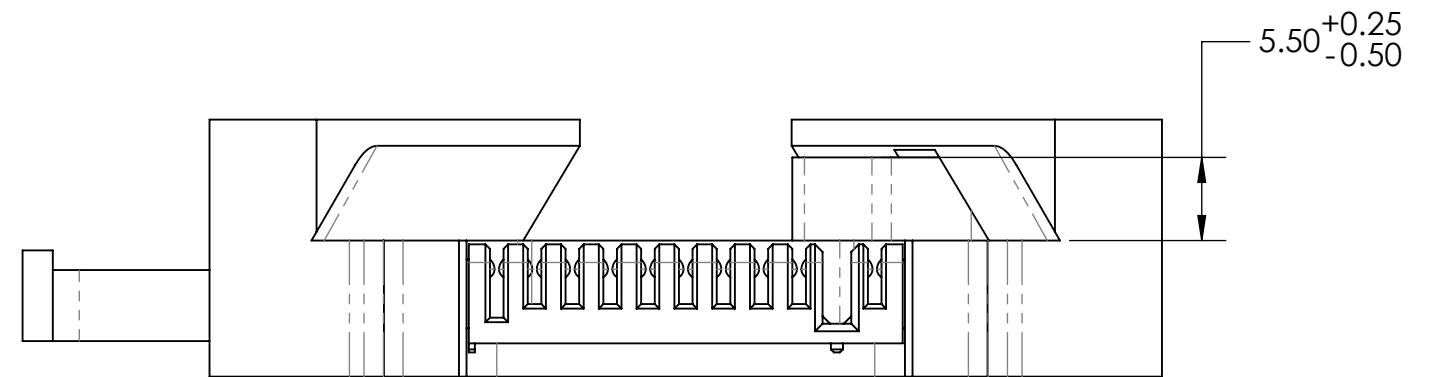

EXAMPLE SPRING RECESS

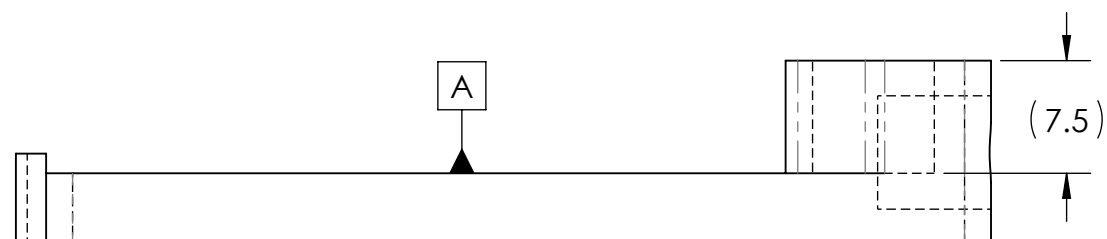

RECOMMENDED SPRING RETURN FORCE
BETWEEN 1LBF AND 2LBF FROM NOMINAL
PAYLOAD ENGAGEMENT POINT TO FULL
COMPRESSION OF SLIDER

RELEASE SLIDER

PAYLOAD (DEVICE) SIDE

