


1. Red : 10.35.29.0/24

Área	Dirección de red	Más car a	Máscara en bits	1° Host	último host	Broadcast
PC1	10.35.29.0	/26	255.255.255.192	10.35.29.1	10.35.29.62	10.35.29.63
PC2	10.35.29.64	/27	255.255.255.224	10.35.29.65	10.35.29.94	10.35.29.95
PC3	10.35.29.96	/28	255.255.255.240	10.35.29.97	10.35.29.110	10.35.29.111
PC4	10.35.29.112	/29	255.255.255.248	10.35.29.113	10.35.29.118	10.35.29.119
R1-R2	10.35.29.120	/30	255.255.255.252	10.35.29.121	10.35.29.122	10.35.29.123
R2-R3	10.35.29.124	/30	255.255.255.252	10.35.29.125	10.35.29.126	10.35.29.127

Topología utilizada:

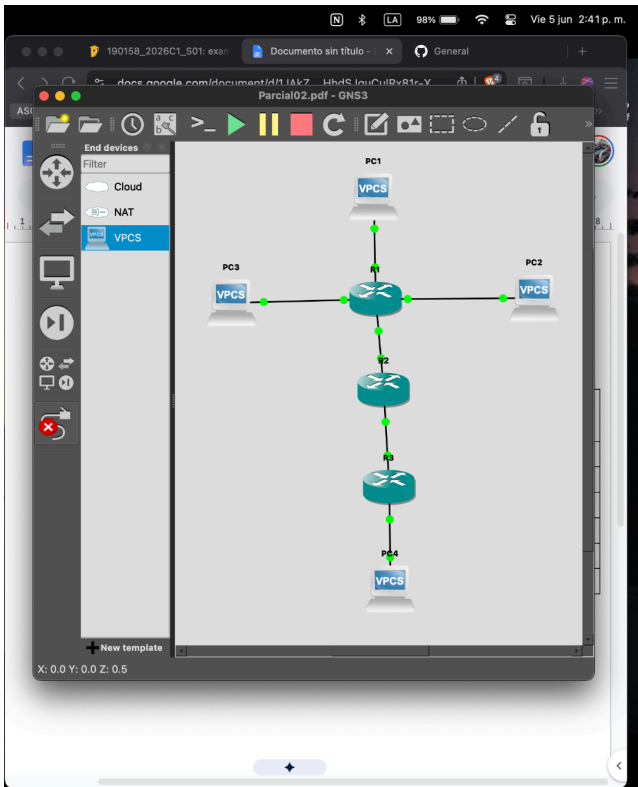

Carnet: 00|13|37|23

A: 35 Y B:29

Configuración IP de las Pcs

The screenshot displays a network simulation interface with multiple terminal windows and a topology diagram. The terminals show the configuration of four PCs (PC1, PC2, PC3, PC4) with their respective IP addresses, masks, and gateways. The topology diagram shows the physical layout of the network, including routers and switches.

PC1 Configuration:

```
PC1> ip 10.35.29.2 255.255.255.192 10.35.29.1
PC1> show ip
NAME : PC1[1]
IP/MASK : 10.35.29.2/26
GATEWAY : 10.35.29.1
DNS :
MAC : 00:50:79:66:68:00
LPORT : 10028
RHOST:PORT : 127.0.0.1:10029
MTU : 1500
```

PC2 Configuration:

```
PC2> ip 10.35.29.66 255.255.255.224 10.35.29.65
PC2> show ip
NAME : PC2[1]
IP/MASK : 10.35.29.66/27
GATEWAY : 10.35.29.65
DNS :
MAC : 00:50:79:66:68:01
LPORT : 10030
RHOST:PORT : 127.0.0.1:10031
MTU : 1500
```

PC3 Configuration:

```
PC3> ip 10.35.29.98 255.255.255.240 10.35.29.97
PC3> show ip
NAME : PC3[1]
IP/MASK : 10.35.29.98/28
GATEWAY : 10.35.29.97
DNS :
MAC : 00:50:79:66:68:02
LPORT : 10032
RHOST:PORT : 127.0.0.1:10033
MTU : 1500
```

PC4 Configuration:

```
PC4> ip 10.35.29.114 255.255.255.248 10.35.29.113
PC4> show ip
NAME : PC4[1]
IP/MASK : 10.35.29.114/29
GATEWAY : 10.35.29.113
DNS :
MAC : 00:50:79:66:68:03
LPORT : 10034
RHOST:PORT : 127.0.0.1:10035
MTU : 1500
```

Topology Diagram:

The topology diagram shows a central router (R2) connected to three other routers (R1, R3, R4). R1 is connected to PC1, R3 to PC2, and R4 to PC3. R2 is connected to PC4. The diagram also shows the physical layout of the network, including switches and links.

Configuración de interfaces de routers

The screenshot displays a network simulation interface with multiple terminal windows and a topology diagram. The terminals show the configuration of three routers (R1, R2, R3) with their respective interfaces and IP addresses. The topology diagram shows the physical layout of the network, including routers and switches.

R1 Configuration:

```
R1> ip 10.35.29.1 255.255.255.192 10.35.29.1
R1> show ip
NAME : R1[1]
IP/MASK : 10.35.29.1/26
GATEWAY : 10.35.29.1
DNS :
MAC : 00:50:79:66:68:00
LPORT : 10028
RHOST:PORT : 127.0.0.1:10029
MTU : 1500
```

R2 Configuration:

```
R2> ip 10.35.29.65 255.255.255.224 10.35.29.65
R2> show ip
NAME : R2[1]
IP/MASK : 10.35.29.65/27
GATEWAY : 10.35.29.65
DNS :
MAC : 00:50:79:66:68:01
LPORT : 10030
RHOST:PORT : 127.0.0.1:10031
MTU : 1500
```

R3 Configuration:

```
R3> ip 10.35.29.97 255.255.255.240 10.35.29.97
R3> show ip
NAME : R3[1]
IP/MASK : 10.35.29.97/28
GATEWAY : 10.35.29.97
DNS :
MAC : 00:50:79:66:68:02
LPORT : 10032
RHOST:PORT : 127.0.0.1:10033
MTU : 1500
```

Topology Diagram:

The topology diagram shows a central router (R2) connected to three other routers (R1, R3, R4). R1 is connected to PC1, R3 to PC2, and R4 to PC3. R2 is connected to PC4. The diagram also shows the physical layout of the network, including switches and links.

A: 35 Y B:29

Terminal

Shell

Edición

Visualización

Ventana

Ayuda

alejandroayala — R1 — telnet localhost 5001 — 80x24

```

R1#show ip route interface
Translating 'interface'
...
% Invalid input detected at '^' marker.

R1#show ip route
Codes: C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       I - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       Ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route

Gateway of last resort is not set

10.0.0.0/8 is variably subnetted, 6 subnets, 5 masks
C       10.35.29.0/26 is directly connected, FastEthernet0/0
S       10.35.29.112/29 [1/0] via 10.35.29.121
S       10.35.29.124/30 [1/0] via 10.35.29.125
S       10.35.29.128/30 is directly connected, FastEthernet0/1
S       10.35.29.96/28 is directly connected, FastEthernet0/0
S       10.35.29.64/27 is directly connected, FastEthernet0/1
R1#

```

alejandroayala — R2 — telnet localhost 5002 — 80x24

```

R2#co
Mon 1 00:44:33.043: SYS5-5-CONF1G1: Configured from console by console
R2#en
Building configuration...
[R2]
R2#show ip route
Codes: C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       I - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       Ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route

Gateway of last resort is not set

10.0.0.0/8 is variably subnetted, 6 subnets, 5 masks
S       10.35.29.0/26 [1/0] via 10.35.29.122
S       10.35.29.112/29 [1/0] via 10.35.29.125
S       10.35.29.124/30 is directly connected, FastEthernet0/1
S       10.35.29.128/30 is directly connected, FastEthernet0/0
S       10.35.29.96/28 [1/0] via 10.35.29.122
S       10.35.29.64/27 [1/0] via 10.35.29.122
R2#

```

alejandroayala — R3 — telnet localhost 5003 — 80x24

```

R3#show ip trace
...
% Invalid input detected at '^' marker.

R3#show ip route
Codes: C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       I - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       Ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route

Gateway of last resort is not set

10.0.0.0/8 is variably subnetted, 6 subnets, 5 masks
S       10.35.29.0/26 [1/0] via 10.35.29.126
S       10.35.29.112/29 is directly connected, FastEthernet0/0
S       10.35.29.124/30 is directly connected, FastEthernet0/1
S       10.35.29.128/30 [1/0] via 10.35.29.126
S       10.35.29.96/28 [1/0] via 10.35.29.126
S       10.35.29.64/27 [1/0] via 10.35.29.126
R3#

```

Diagrama de Red

Tabla de Direcciones

Área	Dirección de red	Más car a	Máscara en bits	1° Host	último host	Broadcast
PC1	10.35.29.0	/26	255.255.255.192	10.35.29.1	10.35.29.62	10.35.29.63
PC2	10.35.29.64	/27	255.255.255.224	10.35.29.65	10.35.29.94	10.35.29.95
PC3	10.35.29.96	/28	255.255.255.240	10.35.29.97	10.35.29.110	10.35.29.111
PC4	10.35.29.112	/29	255.255.255.248	10.35.29.113	10.35.29.118	10.35.29.119
R1-R2	10.35.29.120	/30	255.255.255.252	10.35.29.121	10.35.29.122	10.35.29.123
R2-R3	10.35.29.124	/30	255.255.255.252	10.35.29.125	10.35.29.126	10.35.29.127

Topología utilizada:

The collage consists of three main parts:

- Terminal Window (Top Left):** Shows the configuration of a Cisco IOS router (PC1) for a telnet session. The configuration includes setting the hostname to 'PC1', enabling telnet, and configuring the VTY lines. The output shows the router's configuration and the telnet session status.
- Google Docs Document (Top Right):** A document titled 'Documento sin título' containing a table with network parameters. The table has columns for 'Área', 'Dirección de red', 'Máscara', 'Máscara en bits', '1° Host', 'último host', and 'Broadcast'. The rows represent different network segments (PC1, PC2, PC3, PC4, R1-R2, R2-R3).
- Network Topology Diagram (Bottom):** A diagram showing a network topology. It includes three routers (R1, R2, R3) connected in a triangle. R1 is connected to PC1 and PC2. R2 is connected to PC3. R3 is connected to PC4. The diagram also shows the physical connections between the routers and the PCs.


Carnet: 00|13|37|23

A: 35 Y B:29

2. Red: 192.35.29.0/24

Área	Dirección de red	Máscara	Máscara en bits	1° Host	último host	Broadcast
PC1	192.35.29.0	/26	255.255.255.192	192.35.29.1	192.35.29.62	192.35.29.63
PC2	192.35.29.64	/27	255.255.255.224	192.35.29.65	192.35.29.94	192.35.29.95
PC3	192.35.29.96	/28	255.255.255.240	192.35.29.97	192.35.29.110	192.35.29.111
PC4	192.35.29.112	/28	255.255.255.240	192.35.29.113	192.35.29.126	192.35.29.127
PC6	192.35.29.128	/29	255.255.255.248	192.35.29.129	192.35.29.134	192.35.29.135
R1-R3	192.35.29.136	/30	255.255.255.252	192.35.29.137	192.35.29.138	192.35.29.139
R1-R2	192.35.29.140	/30	255.255.255.252	192.35.29.141	192.35.29.142	192.35.29.143
R3-R2	192.35.29.144	/30	255.255.255.252	192.35.29.145	192.35.29.146	192.35.29.147
R3-R4	192.35.29.148	/30	255.255.255.252	192.35.29.149	192.35.29.150	192.35.29.151
R4-R2	192.35.29.152	/30	255.255.255.252	192.35.29.153	192.35.29.154	192.35.29.155
R5-R2	192.35.29.156	/30	255.255.255.252	192.35.29.157	192.35.29.158	192.35.29.159

Topología utilizada:

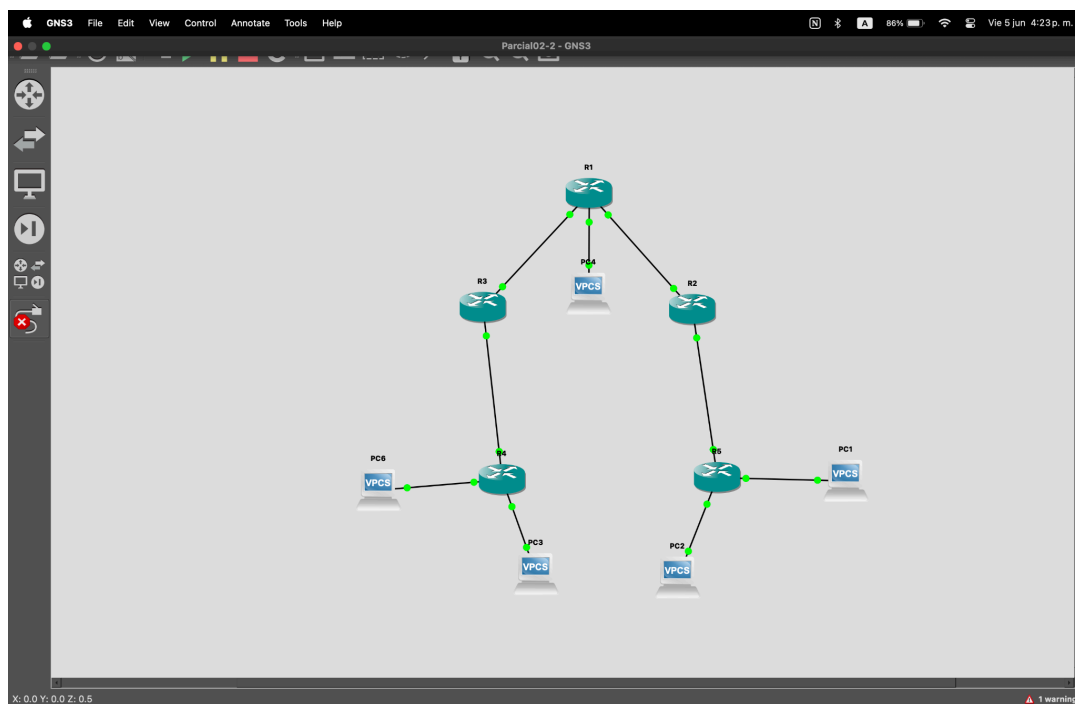

Carnet: 00|13|37|23

A: 35 Y B:29

Procesos generales

Carnet :
00 1337 23 A=13 B=37

22

13 +	37
22	22
35	59

1° host → 50 2⁶ = 64 → 62
2° → 25 2⁵ = 32 → 30
3° → 12 2⁴ = 16 → 14
4° → 6 2³ = 8 → 6
5° → 2 2² = 4

PCI EO → R1 fastE+ 0/0

VLAN

1° 50	• 2 ⁶ = 64 → 62
2° 25	• 2 ⁵ = 32 → 30
3° 12	2 ⁴ = 16 → 14
4° 6	2 ⁴ = 16 → 14
6° 6	2 ³ = 8 → 6
2	

