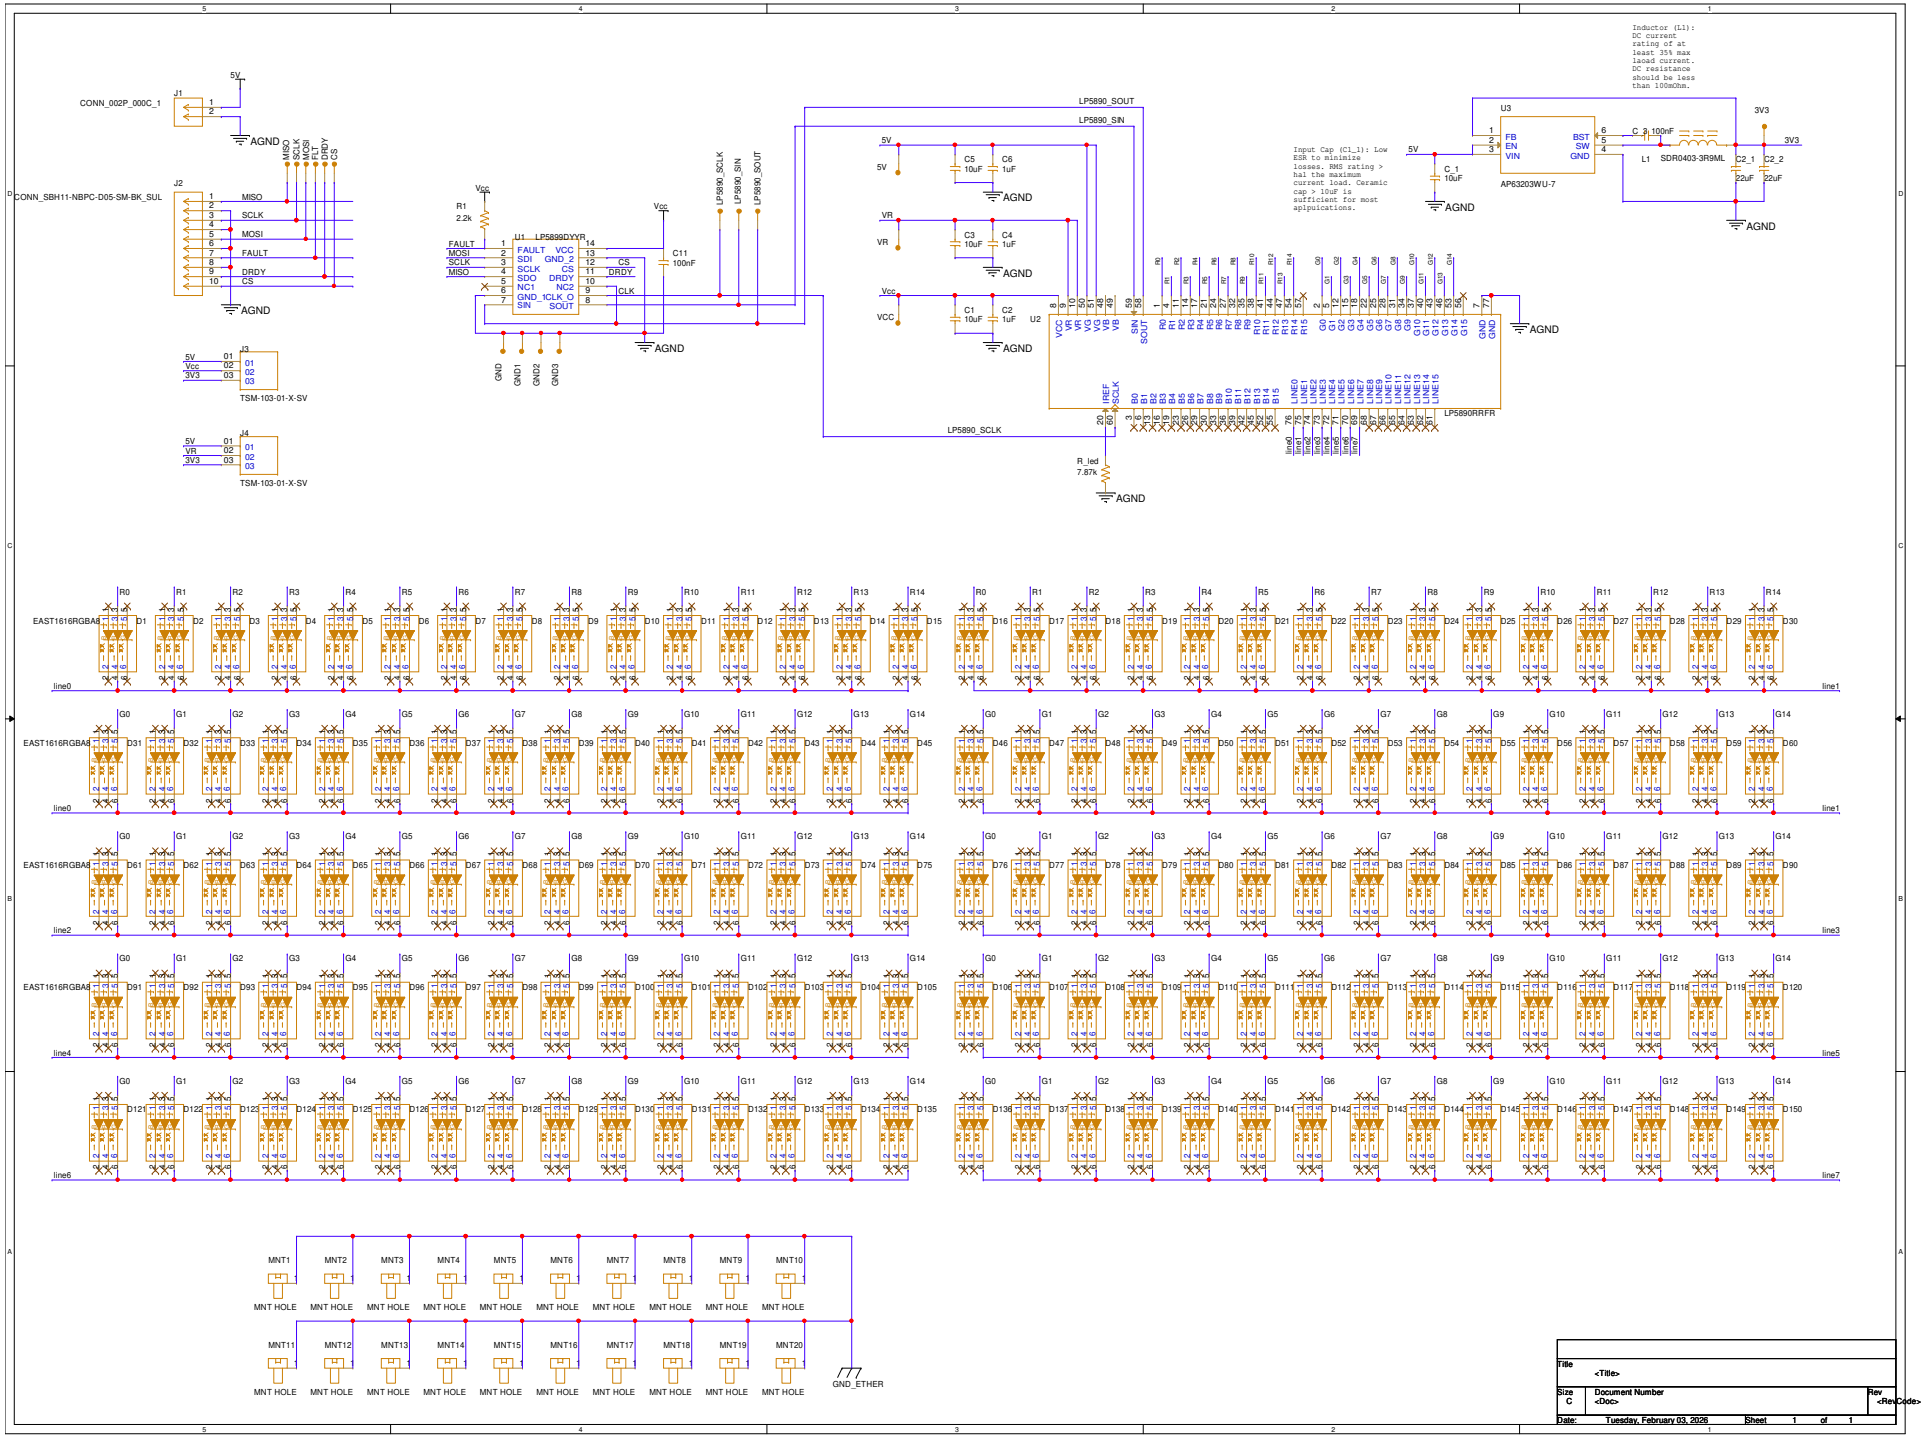
CONN_002P_000C_1
J1
5V
AGND
CONN_SBH11-NBPC-D05-SM-BK_SUL
J2
MISO
SCLK
MOSI
FAULT
DRDY
CS
J3
J4
TSM-103-01-X-SV
R1
2.2k
Vcc
U1 LP5899DYYR
FAULT VCC
SDI GND_2
SCLK CS
SDO DRDY
NC1 NC2
GND_1 CLK
SIN SOUT
C11
100nF
GND
GND1
GND2
GND3
LP5890_SOUT
LP5890_SIN
LP5890_SCLK
C5
10uF
C6
1uF
C3
10uF
C4
1uF
C1
10uF
C2
1uF
U2
VR
VCC
LP5890RRFR
R_led
7.87k
Inductor (L1):
DC current
rating of at
least 35% max
laoad current.
DC resistance
should be less
than 100mOhm.
Input Cap (C1_1): Low
ESR to minimize
losses. RMS rating >
hal the maximum
current load. Ceramic
cap > 10uF is
sufficient for most
apipuications.
U3
FB
EN
VIN
BST
SW
GND
AP63203WU-7
C_1
10uF
C_9
100nF
L1
SDR0403-3R9ML
C2_1
22uF
C2_2
22uF
3V3
EAST1616RGBA8
line0
line1
line2
line3
line4
line5
line6
line7
MNT1
MNT2
MNT3
MNT4
MNT5
MNT6
MNT7
MNT8
MNT9
MNT10
MNT11
MNT12
MNT13
MNT14
MNT15
MNT16
MNT17
MNT18
MNT19
MNT20
MNT HOLE
GND_ETHER
Title
<Title>
Size
C
Document Number
<Doc>
Rev
<RevCode>
Date:
Tuesday, February 03, 2026
Sheet
1
of
1