

Contents

1	Introduction	3
1.1	What this course will teach	3
1.2	Project Kit Contents	3
1.3	Working with the microcontroller	3
1.3.1	Installing the driver	3
1.3.2	Pinout Reference	3
1.3.3	Project Guide Updates	3
2	Electronics Essentials	4
2.1	The Breadboard: Your Circuit's Foundation	4
2.1.1	What is a breadboard?	4
2.1.2	Understanding the layout	4
2.2	LEDs: Lighting Up Your Circuits	4
2.2.1	What is an LED?	4
2.2.2	Polarity	4
2.2.3	Current limiting resistor	4
2.3	Buttons: Interacting with Your Circuits	4
2.3.1	What is a button?	4
2.3.2	Types of buttons	5
2.3.3	Connected Pins	5
2.4	Jumper Cables: Making Connections	5
2.4.1	What are jumper cables?	5
2.4.2	Using jumper cables	5
2.5	Resistors: Controlling Current Flow	5
2.5.1	What is a resistor?	5
2.5.2	Resistance value	5
2.6	LDRs: Sensing Light	5
2.6.1	What is an LDR?	5
2.6.2	Using an LDR with a microcontroller	5
2.7	Safety Tips:	6
3	MicroPython IDE	7
3.1	Connecting Your Microcontroller	7
4	Project 1: Night Light	8
4.1	Overview	8
4.2	Components	9
4.3	Directions	9
4.3.1	Creating the circuit	9
4.3.2	Programming the microcontroller	12
4.3.3	How the program works	12
4.4	Review	13
4.5	Possible Extensions	13
5	Project 2: Red Light, Green Light	14
5.1	Overview	14
5.2	Components	15
5.3	Directions	15
5.3.1	Creating the circuit	15
5.3.2	Programming the microcontroller	16
5.3.3	Hardware test checklist	17
5.4	Review	17
5.5	Possible Extensions	17

6	Project 3: Safe Cracker	18
6.1	Overview	18
6.2	Components	19
6.3	Directions	19
6.3.1	Understanding the KY-040 Rotary Encoder	19
6.3.2	Creating the circuit	20
6.3.3	Understanding the Code	21
6.3.4	Programming the microcontroller	23
6.4	Review	23
6.5	Possible Extensions	23
7	Project 4: Pocket DJ	24
7.1	Overview	24
7.2	Components	25
7.3	Directions	25
7.3.1	Creating the circuit	25
7.3.2	Programming the microcontroller	27
7.3.3	How the program works	28
7.3.4	Hardware test checklist	28
7.4	Review	28
7.5	Possible Extensions	29
8	Project 5: Wi-Fi Mood Lamp	30
8.1	Overview	30
8.2	Components	31
8.3	Directions	31
8.3.1	Creating the circuit	31
8.3.2	Programming the microcontroller	32
8.4	Review	33
8.5	Possible Extensions	33
9	Project 6: ESP-NOW Hot Potato	34
9.1	Overview	34
9.2	Directions	35
9.2.1	Creating the circuit	35
9.2.2	Programming the microcontroller	35
9.3	Review	35
9.4	Possible Extensions	35
10	Project 7: Tilting Ball Maze	36
10.1	Overview	36
10.2	Directions	37
10.2.1	Creating the circuit	37
10.2.2	Programming the microcontroller	37
10.3	Review	37
10.4	Possible Extensions	37
A	Python Primer	38

Chapter 1: Introduction

1.1 What this course will teach

This workshop will introduce the student to Python coding, electronics, and project design. We will be building several projects ranging from simple (less components and simpler code) to more complex (more components or more complicated code). These projects are based on the ESP32-C3 microcontroller (specifically the development board produced by Seeed Studio) which is running MicroPython and they depend on some other electronics components such as LEDs, buttons, and more.

Students are encouraged to make use of the written instructions and diagrams and to explore and play with the components for themselves to see how they work and what they do. There are many online resources as well for learning.

1.2 Project Kit Contents




Figure 1.1: This image shows all of the contents of the project kit and labels what each one is

1.3 Working with the microcontroller

1.3.1 Installing the driver

Connecting the microcontroller to your computer may require the installation of a USB driver. If so, download the driver for your OS from this page and install as instructed: <https://ftdichip.com/drivers/vcp-drivers/>. Once installed successfully, unplug and replug the USB cable into the microcontroller and then press the small reset button on the microcontroller board labeled "R" (for reset).

1.3.2 Pinout Reference

On any integrated circuit, that is a chip that contains electronic logic, a pinout is a diagram and description of what each of the pins of that circuit are used for. This is a very useful document for any electronics engineer to have handy and to reference. The pinout diagram for the microcontroller that we are using as part of this workshop is replicated below:




Figure 1.2: A simplified pinout of the Seeed Studio ESP32-C3 development board

In this diagram, you'll notice several things:

- An image of the microcontroller board in the center
- A label for each pin indicating its function

In the code throughout this guide, you will see references to pin numbers like **Pin(5)**. Wherever you see this, it means that the code is expecting a connection to, in this example, the 4th pin down on the left. If you find that your code is not working as expected, double check the pin numbers in the code vs. the placement of your wires.

1.3.3 Project Guide Updates

In case you are reading an out of date version of this guide, you can find the latest at https://netapp-ptc.github.io/YWIT-2026/project_guide.pdf.

You can also find the source code for all of the workshops and other useful information in the GitHub repository at <https://github.com/NetApp-PTC/YWIT-2026>.

Chapter 2: Electronics Essentials

Electronics is a fascinating world. This beginner's guide will introduce you to the essential components and tools you'll need to start building your own simple circuits. We'll cover the basics of breadboards, LEDs, light sensors (LDRs), buttons, resistors, and jumper cables. You should feel free to explore on your own as well using the components in your kit. While this guide will be useful, it is not even close to everything you'll need to know. There is always more to learn and if electronics interests you, there are lots of online tutorials as well as formal education to guide you further.

2.1 The Breadboard: Your Circuit's Foundation

2.1.1 What is a breadboard?

A breadboard is a reusable platform for prototyping electronic circuits without the need for soldering. It's a plastic board with numerous tiny holes arranged in rows and columns. These holes are connected internally, making it easy to connect components together.

2.1.2 Understanding the layout

Power rails

The long horizontal rows along the top and bottom edges are typically used as power rails to distribute power (positive and negative) throughout the circuit.

Internal connections

The remaining rows are divided into vertical columns, with each column having five holes connected internally. These connections allow you to easily connect multiple components within the same column.

[photo placeholder]

2.2 LEDs: Lighting Up Your Circuits

2.2.1 What is an LED?

An LED (Light-Emitting Diode) is a semiconductor device that emits light when an electric current passes through it. They are available in various colors and are commonly used as indicators or displays in electronic circuits.

2.2.2 Polarity

LEDs have two leads:

- **Anode (longer lead):** Connected to the positive (+) side of the power supply.
- **Cathode (shorter lead):** Connected to the negative (-) side of the power supply.

[photo placeholder]

2.2.3 Current limiting resistor

It's crucial to connect a resistor in series with an LED to limit the current flowing through it. Otherwise, the LED may get damaged or burn out. The value of the resistor depends on the LED's specifications and the power supply voltage.

2.3 Buttons: Interacting with Your Circuits

2.3.1 What is a button?

A button, also known as a pushbutton switch, is a simple mechanical device that completes or breaks an electrical circuit when pressed. They are commonly used to trigger actions or provide input to electronic circuits.

2.3.2 Types of buttons

- **Normally open (NO):** The circuit is open (no connection) when the button is not pressed and closes (connection made) when pressed.
- **Normally closed (NC):** The circuit is closed (connection made) when the button is not pressed and opens (no connection) when pressed.

2.3.3 Connected Pins

Many buttons will have more than two pins (often 4). If they do, then often you can see on the bottom that some of those pins will already be connected together. Pay attention to this so that you wire it up the right way.

[photo placeholder]

2.4 Jumper Cables: Making Connections

2.4.1 What are jumper cables?

Jumper cables are short wires with connectors at both ends used to make temporary connections between components on a breadboard or between a breadboard and other devices.

2.4.2 Using jumper cables

Insert the connectors into the appropriate holes on the breadboard or device to establish a connection.

[photo placeholder]

2.5 Resistors: Controlling Current Flow

2.5.1 What is a resistor?

A resistor is a passive component that limits the flow of electric current in a circuit. They are essential for protecting components (like LEDs) from excessive current and for controlling voltage levels in circuits.

2.5.2 Resistance value

The resistance value is measured in ohms (Ω) and is indicated by colored bands on the resistor body. You can use a resistor color code chart to decode the value.

[photo placeholder]

2.6 LDRs: Sensing Light

2.6.1 What is an LDR?

An LDR (light-dependent resistor), also called a photoresistor, is a resistor whose resistance changes with light. More light typically means lower resistance; covering it with your hand means higher resistance. Unlike an LED, an LDR has no polarity either orientation is fine.

2.6.2 Using an LDR with a microcontroller

A microcontroller pin measures voltage, not resistance directly. Pair the LDR with a fixed resistor to make a voltage divider, then connect the middle of that divider to an analog input pin. As the LDR's resistance changes, the voltage at the middle changes, and your program can read it as a number.

2.7 Safety Tips:

- Always disconnect the power supply before making any changes to the circuit.
- Be careful not to short-circuit the power supply by connecting the positive and negative rails directly.
- If you smell burning or see smoke, immediately disconnect the power supply.

Chapter 3: MicroPython IDE

3.1 Connecting Your Microcontroller

Throughout this guide, we will be making use of a free online IDE for connecting our microcontroller to our computer and loading, editing, and running code on it. You can access the IDE from your browser by going to <https://viper-ide.org/>. Click on the USB icon in the top right and choose your microcontroller from the list:




Figure 3.1: Click the button highlighted in red.

If you see multiple items in the dialog that pops up, choose the one that starts with "USB JTAG". See below for an example:




Figure 3.2: Click the button highlighted in red.

Once you have connected, you will see a green dialog labeled "Device connected" and the file manager on the list will populate with the list of files installed on the device:




Figure 3.3: Make sure to open the right file for this project

After your device is connected, refer back to the chapter you are working on for the next steps.


Chapter 4: Project 1: Night Light

4.1 Overview

This project is designed to provide a foundation for subsequent projects in this book (**and beyond**). Over the course of this project, you will:

- Create a simple circuit using your breadboard
- Write a program that runs in a loop
- Use MicroPython to read an analog sensor and drive an LED with PWM

At the end of this project, your microcontroller should run a MicroPython program that dims and brightens an LED as you cover and uncover a light sensor. Cover the sensor with your hand and the LED should get brighter—like a night light.



[photo placeholder]

Figure 4.1: The end result should look something like this


Learning goals:

- Build a first breadboard circuit with an LED, a current-limiting resistor, and an LDR
- Read a light level with the microcontroller's analog-to-digital converter (ADC)
- Use PWM (Pulse Width Modulation) to set LED brightness instead of only on or off

4.2 Components

- Seed XIAO ESP32-C3 microcontroller
- 1x LED (any color)
- 1x 220 Ω resistor (for the LED)
- 1x photoresistor (LDR)
- 1x 10k Ω resistor (for the LDR voltage divider)
- Breadboard
- Jumper wires

Which resistor is which? Both resistors are small and blue with five evenly spaced colored bands, and nothing is printed on them. You do not need to figure out which end to read from—just count the **red** bands. The **220 Ω** resistor has **two red bands next to each other**, and the **10k Ω** resistor has **exactly one red band**. Swapping the two will not damage anything, but the circuit will not behave the way this project describes, so ask an instructor if you are not sure.

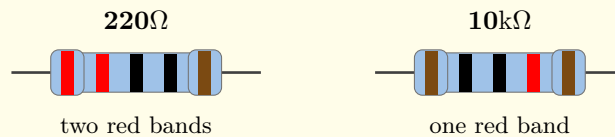

4.3 Directions

4.3.1 Creating the circuit

Using jumper cables, you will assemble two small circuits: an LED with a current-limiting resistor, and a light sensor made from an LDR and a 10k Ω resistor.

Attach the microcontroller to the breadboard

Orient the microcontroller so that the pin labeled **5V** goes into hole **H1** (Column H, Row 1), **GPIO2** into **D1**, **GPIO20** into **H7**, and **GPIO21** into **D7**. Then press it down—this takes more force than you might expect.

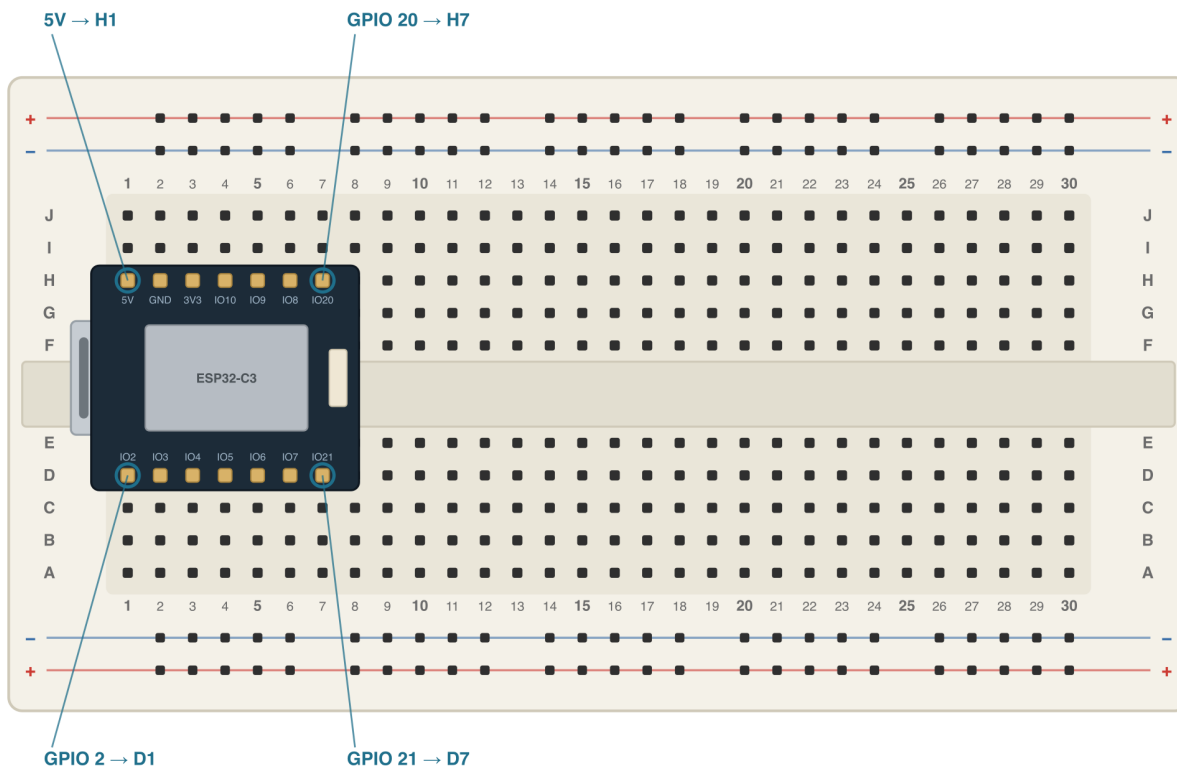


Figure 4.2: So far, so good!

Connect the LED and 220 Ω resistor

Place an LED of your choice (the example image below uses RED) into the breadboard. The longer leg should be placed in **B16** and the shorter leg should be placed in **B17**. Then place one leg of a 220 Ω resistor (doesn't matter which one) in **A17** and the other in **A21**.

You should be left with something that looks like this:

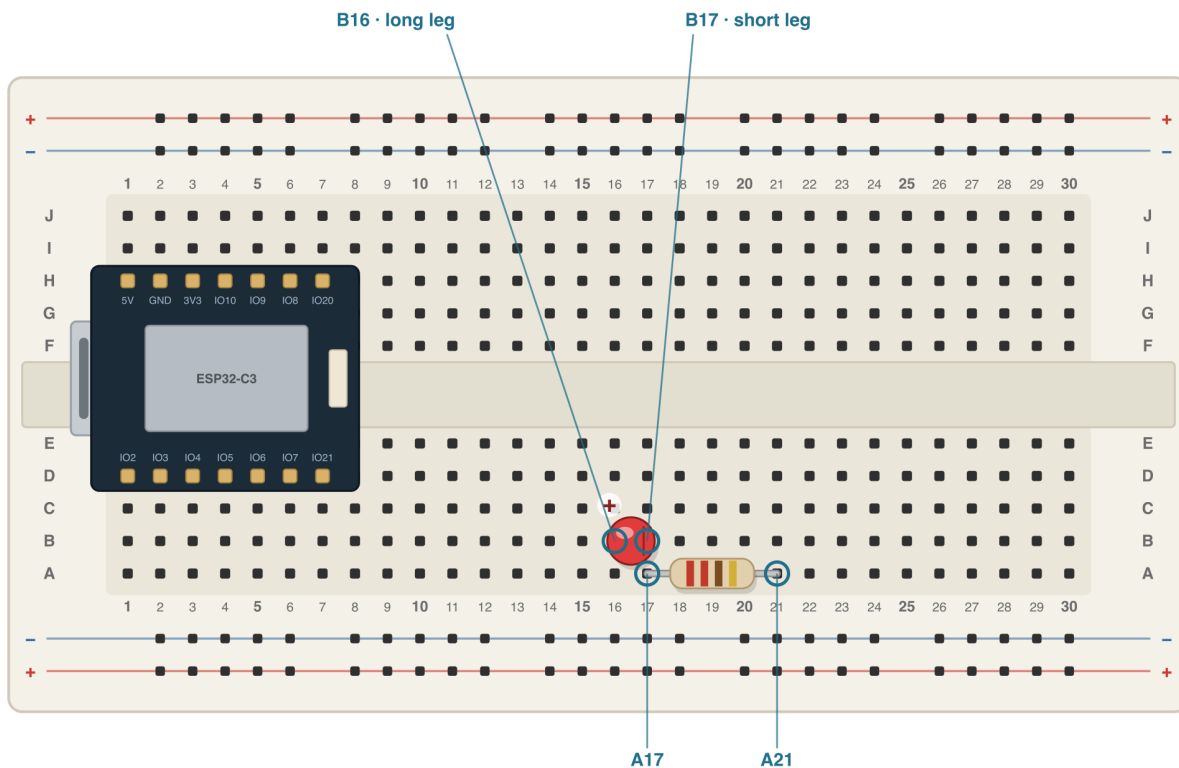


Figure 4.3: The LED and its current-limiting resistor are placed.

NOTE: Whenever you connect an LED to a circuit, you must always connect a resistor in series with it. In series means that the power goes in one leg of the LED, the other leg of the LED is attached to one leg of the resistor, and the ground completes the circuit from the other leg of the resistor. This is important so that you do not burn out the LED and/or the microcontroller pin.

Connect the LDR and 10k Ω resistor

An LDR (light-dependent resistor) has no polarity—either orientation is fine. Place one leg in **B10** and the other in **B11**. Then place one leg of a 10k Ω resistor in **A10** and the other in **A14**.

The LDR and the 10k Ω resistor share row 10. Together they form a **voltage divider**: the microcontroller will measure the voltage at that shared row, which changes as the LDR sees more or less light.

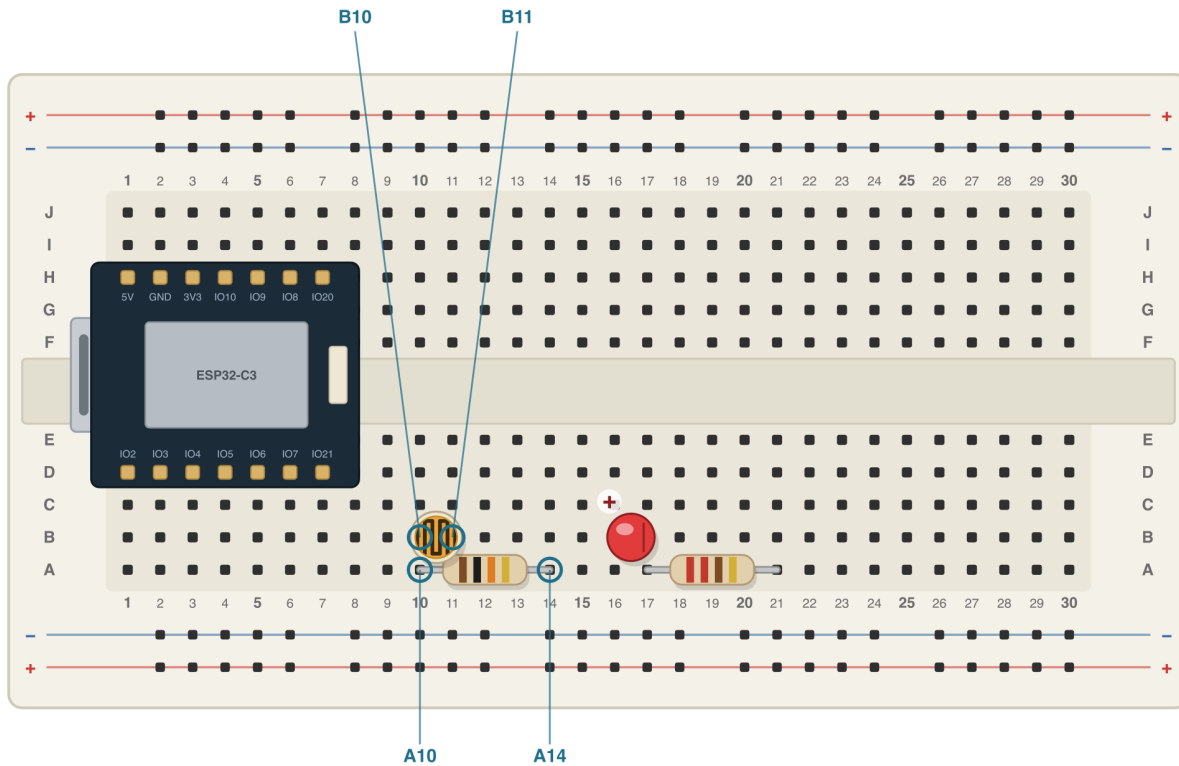


Figure 4.4: All of the components except for the jumper wires are now placed.

Connect the necessary jumper wires

Circuit connection	XIAO pin	Jumper holes
LED anode	GPIO 20	J7 → E16
LED resistor	GND	J2 → E21
LDR/resistor junction	GPIO 2	C1 → E10
LDR	3V3	J3 → E11
LDR resistor	GND	I2 → E14

The program uses PWM on GPIO 20 to set the LED brightness. GPIO 2 measures the voltage at the junction between the LDR and its 10kΩ resistor.

You should be left with something that looks like this:

If something does not work:

- If the LED never lights, check LED polarity (longer leg toward GPIO 20 / hole **B16**), the 220Ω resistor, and the jumper from **J7** to **E16**.
- If the LED lights but does not change when you cover the sensor, check the LDR divider: GPIO 2 (**C1** to **E10**), 3.3V (**J3** to **E11**), and ground (**I2** to **E14**). Watch the printed numbers—if they never move, the sensor wiring is the problem.
- Classroom lighting varies. If the LED looks stuck bright or stuck dim, cover the LDR fully with your hand, then uncover it, and compare the two printed `level` values.

4.4 Review

In this project, we learned the basics of setting up a simple circuit and running some code to interact with that circuit. We learned that some pins can be programmed to turn connected devices on and off, and that PWM lets us control **how bright** an LED is, not only whether it is on. We also learned that an LDR plus a resistor makes a voltage divider the microcontroller can measure, and that connecting an LED in a circuit always requires adding a resistor in series to prevent burning out the components.

4.5 Possible Extensions

If you want to do some experimentation, try these:

- Swap the mapping so the LED is a **daytime indicator** (brighter when the room is brighter). Hint: use `duty = level * PWM_MAX // ADC_MAX` instead of subtracting from `ADC_MAX`.
- Add `LIGHT_MIN` and `LIGHT_MAX` constants from the numbers you printed, then scale the reading so covering and uncovering the sensor uses the full dim-to-bright PWM range.
- Slow the loop (`time.sleep`) or print less often if the serial console is too noisy.

Chapter 5: Project 2: Red Light, Green Light

5.1 Overview

In this project, you will build a reflex game with a button and a 3-pixel WS2812B LED strip. Each reaction window cycles through red, yellow, and green phases:

- During **RED**, do not press. Pressing during red ends the round immediately.
- During **YELLOW**, get ready for green and do not press yet.
- During **GREEN**, press the button as quickly as possible to score a point.

Each successful green press prints your reaction time in milliseconds to the serial console. Each round has 5 total reaction windows. A hit during green scores a point, and a missed green window counts as a miss.

Learning goals:

- Read a pushbutton using an internal pull-up resistor
- Control WS2812B addressable LEDs with MicroPython
- Build a simple game state machine
- Measure reaction time with millisecond timers

5.2 Components

- Seed XIAO ESP32-C3 microcontroller
- 3-pixel WS2812B LED strip
- 1x pushbutton
- Breadboard
- Jumper wires

5.3 Directions

Remove previous components

Before starting Project 2, remove components and wires from the previous project.

5.3.1 Creating the circuit

Attach the microcontroller to the breadboard

Orient the microcontroller so that the pin labeled **5V** goes into hole **H1** (Column H, Row 1), **GPIO2** into **D1**, **GPIO20** into **H7**, and **GPIO21** into **D7**. Then press it down—this takes more force than you might expect.

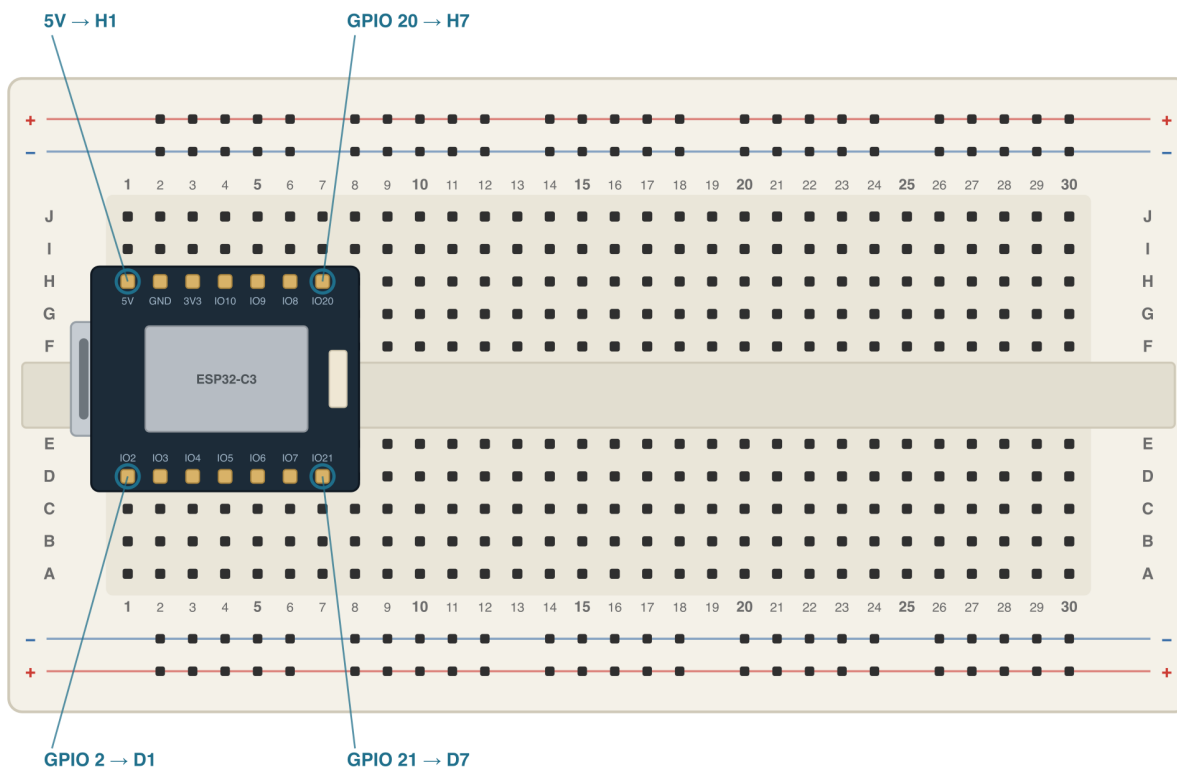


Figure 5.1: So far, so good!

WS2812B strip wiring

The LED strip has a right-angle header so it stands upright once seated. Push those three pins into the top half of the board: **5V** into **J12**, **DI** into **J13**, and **GND** into **J14**. Then add these connections:

WS2812B pin	XIAO pin	Jumper holes
5V	3V3	I3 → I12
DI	GPIO 20	I7 → I13
GND	GND	I2 → I14

Button wiring

Press the button into the bottom edge of the board so that its legs reach from column **A** up to column **D**. One pair of legs goes into **A12** and **D12**, and the other pair two rows along into **A14** and **D14**. The two legs of a pair are already joined inside the button, so it is the gap between the two pairs that the button closes. Then add these connections:

Button connection	XIAO pin	Jumper holes
One side	GPIO 21	C7 → E12
Other side	GND	J2 → E14

The code enables the internal pull-up resistor, so the pin reads HIGH when idle and LOW when pressed.

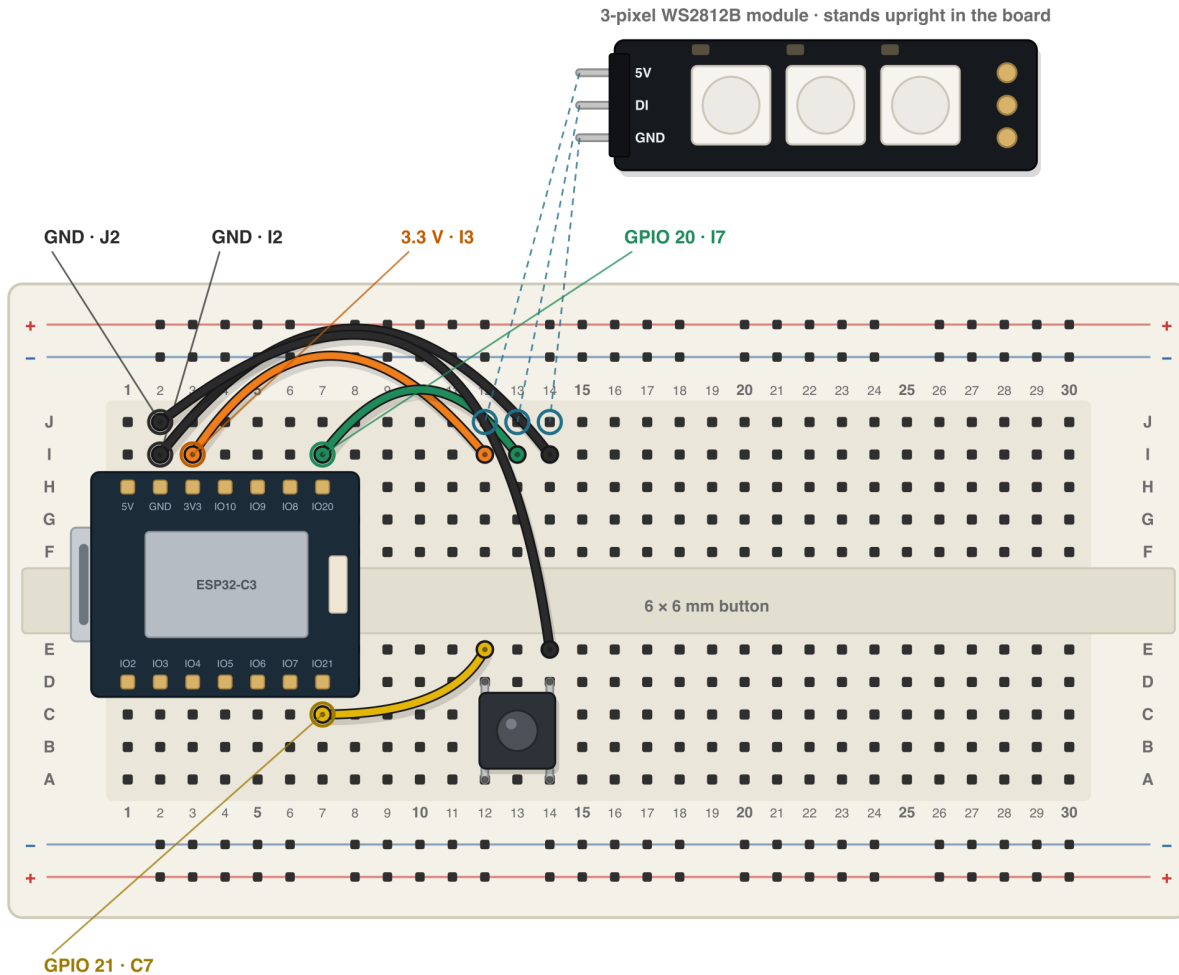


Figure 5.2: Connect the LED strip and button to the XIAO ESP32-C3.

5.3.2 Programming the microcontroller

Open the file `project_2_red_light_green_light.py` and run it in the IDE (Chapter 3).

At startup, the serial console will print instructions and wait for a button press to begin:

Project 2: Red Light, Green Light
Press button to start.

During gameplay:

- The 3 LEDs act like a stoplight: red LED, yellow LED, and green LED are used individually.
- RED phase lights only the red LED and prints “RED! Do not press.”
- YELLOW phase lights only the yellow LED and prints “YELLOW! Get ready...”
- GREEN phase lights only the green LED and prints “GREEN! Press now.”
- Idle/round-over uses the yellow LED as a waiting indicator.
- A valid green press prints reaction time and increases score.
- A missed green window is counted as one of the 5 windows.
- A red/yellow press ends the round and prints final score + best reaction.

5.3.3 Hardware test checklist

Use this checklist to confirm your circuit and code are working:

1. Confirm LED order on your strip: the LED closest to the header is red, the middle is yellow, and the far end is green.
2. Press button from idle state: yellow wait indicator transitions into red/green gameplay cycling.
3. Wait for GREEN (green LED only) and press quickly: score increases and a reaction time is printed.
4. Do not press during RED or YELLOW: pressing before green ends the round immediately.
5. Skip pressing during one green window: verify it is counted as a miss and the next window starts.
6. Repeat at least 5 rounds to confirm stable behavior and reliable button detection.

5.4 Review

In this project, you combined timed logic, button input, and LED output to build a full game loop. You practiced:

- State-based programming (idle, green, red, round_over)
- Reusing a shared debounced button library for cleaner input handling
- Using `time.ticks_ms()` and `time.ticks_diff()` for timing
- Providing immediate visual and text feedback to players

5.5 Possible Extensions

Try these enhancements:

- Add difficulty levels by shrinking GREEN timing windows
- Display average reaction time after each round
- Add a buzzer sound effect for valid and invalid presses
- Use different LED patterns (chase, blink, gradient) per game state
- Add a countdown before each round starts

Chapter 6: Project 3: Safe Cracker

6.1 Overview

In this project, you will build a combination-lock game using a rotary encoder and a small speaker. Spin the encoder dial to select digits 0–9, press the built-in encoder button to lock in each digit, and listen for audio hints that get warmer as you approach the correct value. Match the full secret sequence to “open the safe!”

Over the course of this project, you will:

- Wire a KY-040 rotary encoder module to your microcontroller
- Wire a small speaker using PWM (Pulse Width Modulation) to generate tones
- Use library code to reliably read encoder rotation and button presses
- Program a game loop with randomized secret codes and audio proximity feedback
- Practice reading serial output to debug your program

At the end of this project, your microcontroller will run a fully playable combination-lock game entirely driven by sound and a single knob—no screen required!

How the game works: A random 3-digit secret code (each digit 0–9) is generated when the program starts and printed to the serial console. Spin the encoder knob to change the current dial value. As you get closer to the target digit, the tone played on each tick gets higher and shorter. When you are exactly on the target, you hear a sharp high click. Press the encoder button to lock in your digit. A correct digit advances you to the next position; a wrong digit plays a low buzz and you try again. Crack all three digits to trigger the victory fanfare and start a new game!

6.2 Components

- Seed XIAO ESP32-C3 microcontroller
- KY-040 rotary encoder module (5-pin, includes onboard pull-up resistors)
- Treedix 1W 8 Ω mini speaker (JST 2-pin connector)
- Breadboard
- Jumper wires

6.3 Directions

Remove previous components

Before beginning, remove any components from prior chapters including LEDs, buttons, and wires. You may leave the microcontroller attached to the breadboard.

Attach the microcontroller to the breadboard

Orient the microcontroller so that the pin labeled **5V** goes into hole **H1** (Column H, Row 1), **GPIO2** into **D1**, **GPIO20** into **H7**, and **GPIO21** into **D7**. Then press it down—this takes more force than you might expect.

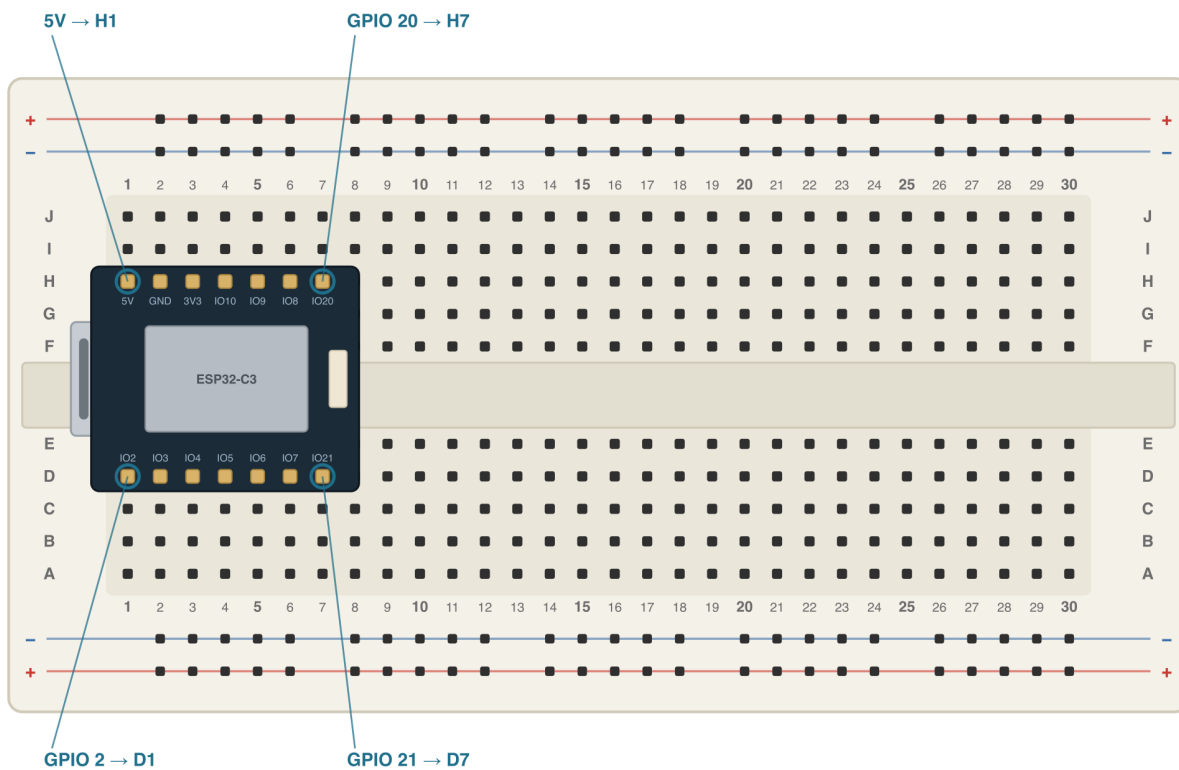


Figure 6.1: So far, so good!

6.3.1 Understanding the KY-040 Rotary Encoder

A rotary encoder is a type of position sensor that converts the angular position (rotation) of a knob into electrical signals. Unlike a potentiometer, an encoder has no physical stops—you can spin it continuously in either direction.

The KY-040 module has five pins:

- **CLK** — Clock signal; pulses as the knob turns
- **DT** — Data signal; used together with CLK to determine direction
- **SW** — Switch; goes LOW when the built-in button is pressed
- **+** — Power supply (connect to 3.3V); some boards label this **VCC**
- **GND** — Ground

Hold the module with the knob facing you and the pins pointing down: the silkscreen reads **GND**, **+**, **SW**, **DT**, **CLK** from left to right.

Important: Power the KY-040 from **3.3V**, not 5V. The ESP32-C3 GPIO pins are not 5V-tolerant, so using 5V could damage your microcontroller.

6.3.2 Creating the circuit

Using jumper cables, assemble the circuit according to the following wiring table. The encoder and speaker share the breadboard with the microcontroller.

KY-040 Encoder Wiring

Seat the encoder module's five-pin header along the front edge of the breadboard, knob facing you, so the pins land in silkscreen order: **GND** in **A12**, **+** in **A13**, **SW** in **A14**, **DT** in **A15**, and **CLK** in **A16**. Row A leaves the knob clear of the other wiring, so it is easier to grip and turn. Then add these connections:

KY-040 pin	XIAO pin	Jumper holes
GND	GND	I2 → E12
+ (VCC)	3V3	I3 → E13
SW	GPIO 8	I6 → E14
DT	GPIO 9	I5 → E15
CLK	GPIO 10	I4 → E16

Speaker Wiring

Insert the speaker's adapted Dupont leads into the bottom half of the breadboard: the positive lead in **C20** and the negative lead in **C22**. Then add these connections:

Speaker lead	XIAO pin	Jumper holes
Signal (+)	GPIO 20	I7 → E20
Ground (−)	GND	J2 → E22

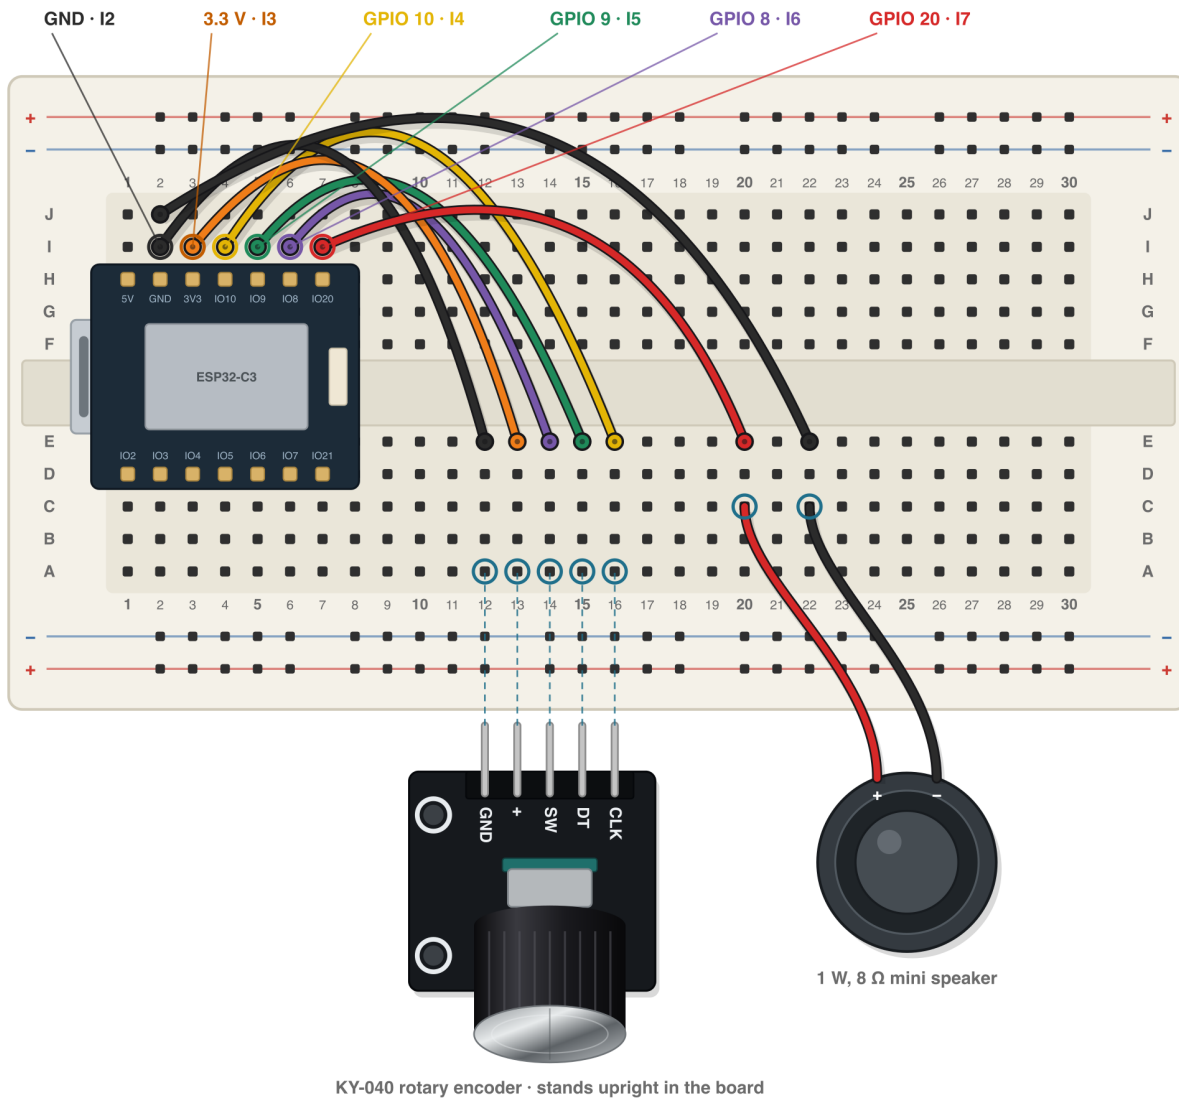


Figure 6.2: Encoder and speaker wired to the XIAO ESP32-C3

6.3.3 Understanding the Code

Open the file named `project_3_safe_cracker.py` in the IDE. Let's walk through the key sections.

Configuration Constants

At the top of the file, a configuration block defines all pin assignments and game parameters in one place. This makes it easy to adjust the game without hunting through the code:

Listing 6.1: Configuration constants

```

1 CODE_LENGTH = 3
2 DIAL_MIN = 0
3 DIAL_MAX = 9
4
5 PIN_CLK = 10
6 PIN_DT = 9
7 PIN_SW = 8
8 PIN_SPEAKER = 20
9
10 TONE_EXACT = (880, 80) # high click when exactly on target
11 TONE_WARM = (550, 50) # warm mid tone when 1-2 away
12 TONE_COLD = (220, 30) # low cold tone when 3+ away

```

```

13 TONE_BUZZ    = (150, 200) # wrong-digit buzz
14 VICTORY_NOTES = [(262, 150), (330, 150), (392, 150), (523, 400)]

```

Playing Tones with PWM

The `play_tone` function uses PWM (Pulse Width Modulation) to drive the speaker. PWM rapidly switches the GPIO pin on and off at a given frequency, which the speaker cone turns into sound:

Listing 6.2: PWM tone helper

```

1 def play_tone(freq, duration_ms):
2     pwm = PWM(Pin(PIN_SPEAKER), freq=freq, duty=512)
3     time.sleep_ms(duration_ms)
4     pwm.deinit()

```

A duty of 512 out of 1023 means the pin is HIGH roughly half the time—this is called a 50% duty cycle and produces the loudest sound for a square wave.

Proximity Hints

The game measures how close the current dial value is to the target digit using a *circular distance*. Because the dial wraps around (0 and 9 are neighbors), we take the smaller of the straight-line distance and the wrap-around distance:

Listing 6.3: Circular distance on a 0-9 dial

```

1 def dial_distance(current, target):
2     diff = abs(current - target)
3     return min(diff, 10 - diff)

```

This distance is then mapped to a tone:

Distance to target	Sound
0 (exact match)	High click (880 Hz, 80 ms)
1 or 2 away	Warm mid tone (550 Hz, 50 ms)
3 or more away	Low cold tone (220 Hz, 30 ms)

Reading the Encoder and Button

The code uses two library modules from the `lib/` folder:

- **RotaryIRQ** — reads the encoder using hardware interrupts; configured for bounded range 0–9 with automatic wrap-prevention.
- **DebouncedButton** — reads the encoder’s push-button and fires a callback only once per press, filtering out electrical noise (bouncing).

Listing 6.4: Setting up the encoder and button

```

1 knob = RotaryIRQ(
2     pin_num_clk=PIN_CLK,
3     pin_num_dt=PIN_DT,
4     min_val=DIAL_MIN,
5     max_val=DIAL_MAX,
6     reverse=True,
7     pull_up=True,
8     range_mode=RotaryIRQ.RANGE_BOUNDED,
9 )
10 knob.add_listener(on_dial_change)
11 DebouncedButton(PIN_SW, on_enter)

```

`reverse=True` makes clockwise rotation increase the displayed number (adjust to `False` if your knob spins the wrong way). `pull_up=True` enables the internal pull-up resistors so the CLK and DT pins read HIGH when idle.

Game Loop

Each time the knob moves, `on_dial_change` is called automatically by the library. It reads the current encoder value, computes the distance to the target digit, and plays the corresponding hint tone. When the encoder button is pressed, `on_enter` checks whether the current value matches the target:

- **Correct:** A confirming click plays, the dial index advances. If all digits are correct, the victory fanfare plays and a new game begins.
- **Wrong:** A low buzz plays and the player tries again on the same digit.

6.3.4 Programming the microcontroller

Connect the USB cable to the microcontroller and open the IDE. Refer back to Chapter 3 for IDE instructions if needed. Click on the file named `project_3_safe_cracker.py`. Read through the comments and code to understand how it works, then click the blue play button to start the game.

When the program starts, watch the serial console—it will print the secret code so you (or your instructor) can verify the game is working:

New safe code: [3, 7, 1]

Dial 1/3: showing 5 (target 3, distance 2)

Tip: If the tones are silent, check that the speaker’s signal wire is connected to GPIO 20 and that the ground wire goes to GND. If the dial counts in the wrong direction, change `reverse=True` to `reverse=False` in the code.

6.4 Review

In this project, we combined hardware input (rotary encoder) and output (PWM speaker tones) to build a complete interactive game. We learned:

- How a rotary encoder converts physical rotation into digital signals
- How PWM can drive a speaker to play different pitches
- How to use interrupt-driven library code to read hardware without blocking the main loop
- How circular distance can create smooth “hot and cold” proximity feedback
- How to structure a game with state variables, callbacks, and a main loop

6.5 Possible Extensions

If you want to experiment further, try these ideas:

- Increase `CODE_LENGTH` to 4 or 5 digits for a harder challenge
- Add a countdown timer—if you don’t crack the safe in time, the game resets
- Change the victory fanfare to play a song you recognize (look up the note frequencies!)
- Add a “lives” system: after 3 wrong guesses on the same digit, the game resets
- Print the elapsed time to the serial console when the safe is cracked


Chapter 7: Project 4: Pocket DJ

7.1 Overview

In this project, you will turn your microcontroller into a handheld musical instrument: the **Pocket DJ!** You will wire three pushbuttons, a mini speaker, and a 3-pixel RGB LED strip to your breadboard. Pressing each button triggers a distinct musical note on the speaker and lights up a matching colored pixel on the LED strip.

Over the course of this project, you will:

- Connect multiple tactile pushbuttons and read them using MicroPython
- Use PWM (Pulse Width Modulation) to generate different pitch frequencies on a speaker
- Control individual addressable WS2812B RGB LEDs to create synchronized visual pulses
- Program rhythm loops and sound sequences using Python lists and tuples



[photo placeholder]

Figure 7.1: The assembled Pocket DJ ready to drop some beats!

Learning goals:

- Read pushbuttons with active-low logic and internal pull-up resistors
- Generate musical notes by controlling PWM frequency on a speaker
- Control WS2812B addressable LEDs using the `neopixel` library
- Structure musical sequences and automated rhythm loops in code

7.2 Components

- Seeed XIAO ESP32-C3 microcontroller
- 3-pixel WS2812B LED strip
- 3x Tactile pushbuttons (6×6 mm)
- 1x Treedix 1W 8Ω mini speaker (with breadboard-friendly Dupont leads)
- Breadboard
- Jumper wires

7.3 Directions

Remove previous components

Before beginning, remove components and wires from the previous project. You may leave the microcontroller seated in the breadboard.

7.3.1 Creating the circuit

Attach the microcontroller to the breadboard

Orient the microcontroller so that the pin labeled **5V** goes into hole **H1** (Column H, Row 1), **GPIO2** into **D1**, **GPIO20** into **H7**, and **GPIO21** into **D7**. Then press it down—this takes more force than you might expect.

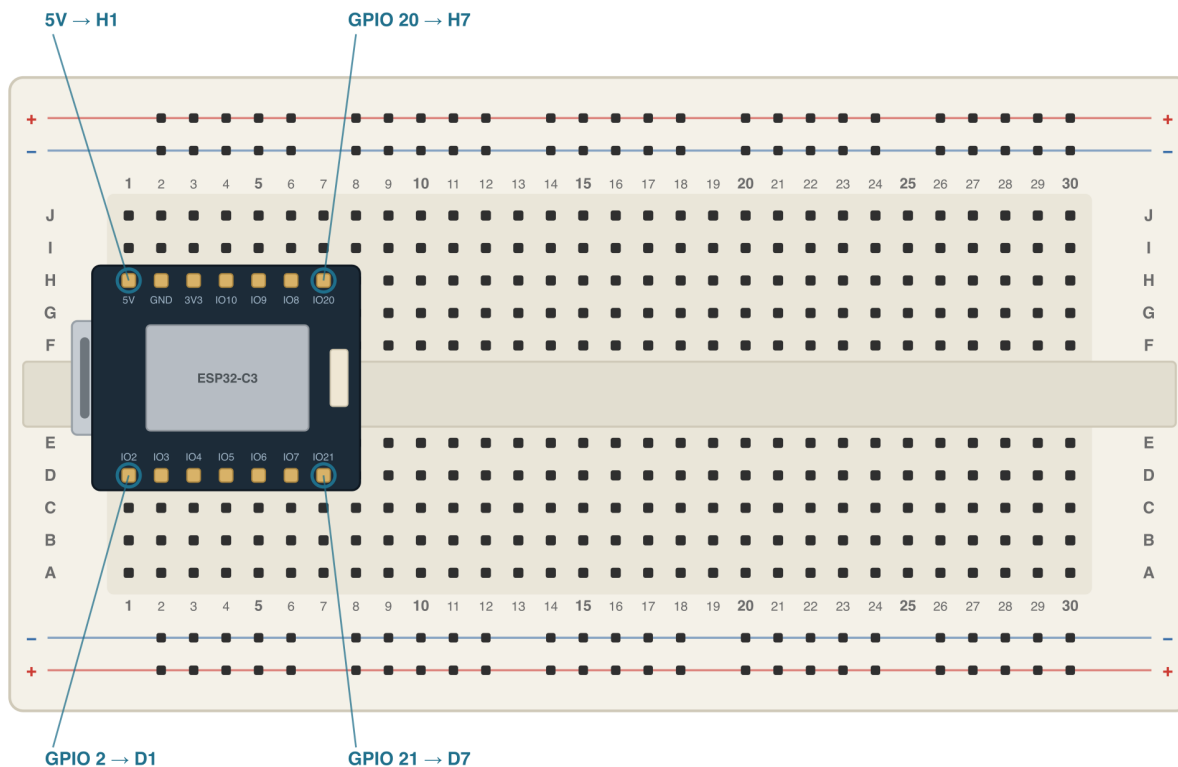


Figure 7.2: So far, so good!

Ground rail distribution

Because we have multiple components requiring a ground connection, we connect the microcontroller's **GND** pin to the breadboard's top blue (–) power rail. This powers the entire rail with ground:

Connection	XIAO pin	Jumper holes
Top GND rail	GND	I2 → top-2

WS2812B LED strip placement and wiring

The LED strip has a right-angle header so it stands upright once seated. Insert those three pins into row **F** (rows 22–24) on the right side of the breadboard so it is clearly visible and not obscured by jumper wires: **5V** into **F22**, **DI** into **F23**, and **GND** into **F24**. Then connect the jumper wires:

WS2812B pin	Source / Pin	Jumper holes
5V	3V3	I3 → J22
DI	GPIO 20	I7 → J23
WS2812B ground	Top GND rail	top-24 → J24

Tactile button placement and wiring

Seat the three pushbuttons in the lower half of the breadboard spanning columns **A** through **D**:

- **Pad 0 (Loop/Bass):** Place one pair of legs in **A10** and **D10**, and the other pair in **A12** and **D12**.
- **Pad 1 (Mid note):** Place one pair of legs in **A14** and **D14**, and the other pair in **A16** and **D16**.
- **Pad 2 (High note):** Place one pair of legs in **A18** and **D18**, and the other pair in **A20** and **D20**.

Connect each button's signal leg (column **E**) to the microcontroller:

Button signal	XIAO pin	Jumper holes
Pad 0 (row 10)	GPIO 21	C7 → E10
Pad 1 (row 14)	GPIO 7	C6 → E14
Pad 2 (row 18)	GPIO 6	C5 → E18

Next, wire each button's ground leg (column **E**) to the top ground rail:

Button ground	Source	Jumper holes
Pad 0 ground	Top GND rail	top-12 → E12
Pad 1 ground	Top GND rail	top-16 → E16
Pad 2 ground	Top GND rail	top-20 → E20

Speaker placement and wiring

Insert the speaker's two Dupont leads into the lower half of the breadboard: the positive red lead into **C26** and the negative black lead into **C28**. Then connect the speaker signal and ground jumpers:

Speaker lead	Source / Pin	Jumper holes
Signal (+)	GPIO 10	I4 → E26
Speaker ground (−)	Top GND rail	top-28 → E28

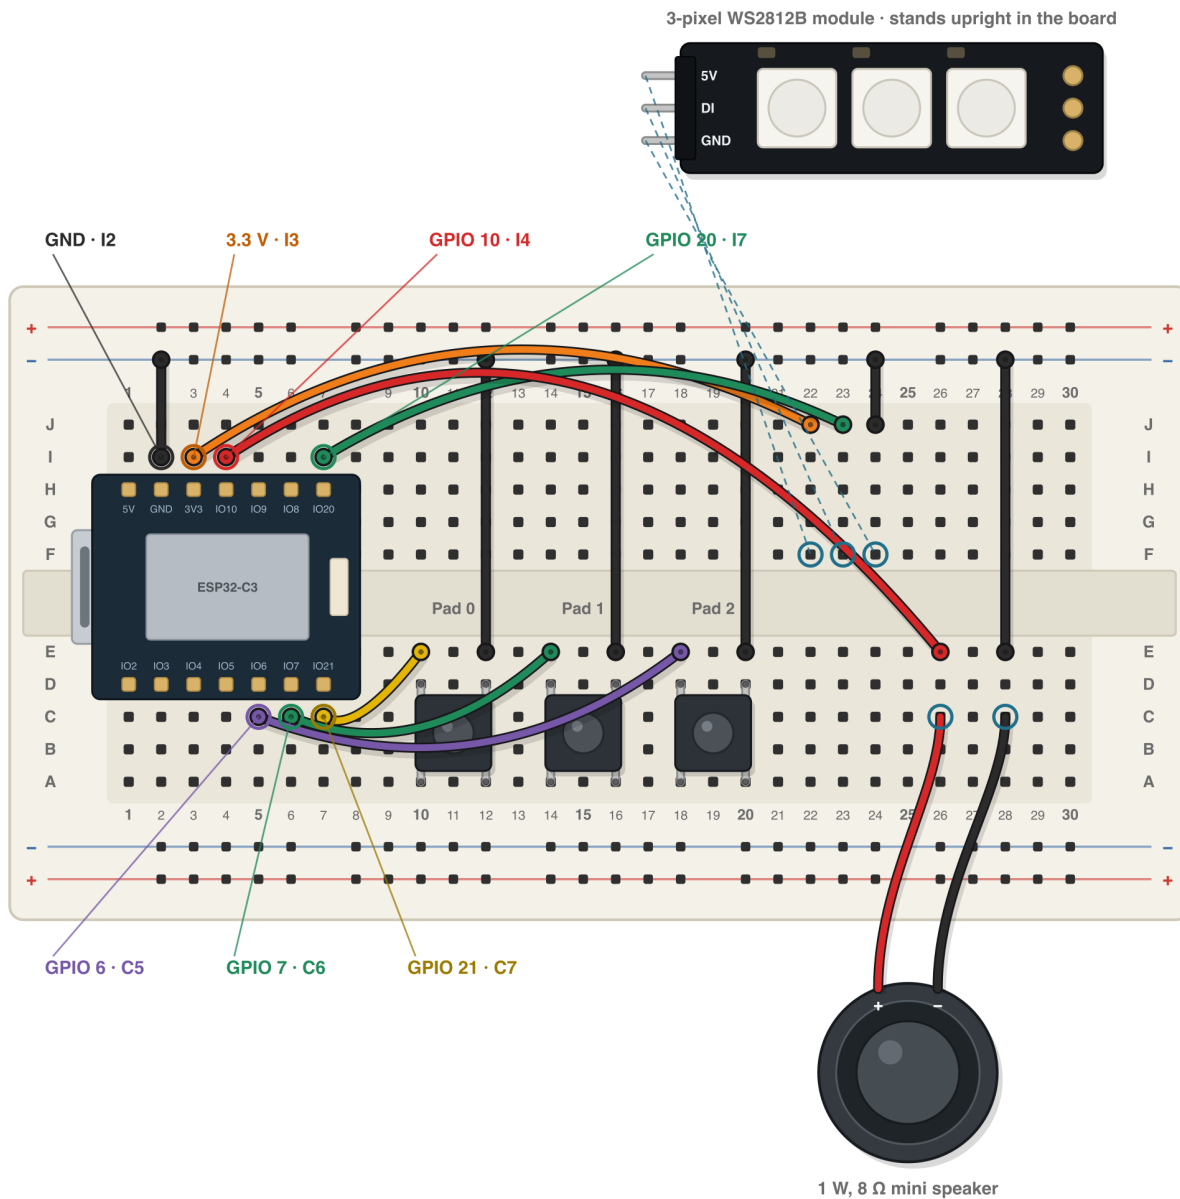


Figure 7.3: Complete wiring diagram for Project 4: Pocket DJ.

7.3.2 Programming the microcontroller

Open the file named `project_4_pocket_dj.py` in the IDE and run it.

When the script starts, the serial console displays:

Project 4: Pocket DJ

Pad 0: GPIO 21 | Pad 1: GPIO 7 | Pad 2: GPIO 6

Speaker: GPIO 10 | LED Strip: GPIO 20

Press any button to play music!

Try pressing each pad:

- **Pad 1** plays a middle note (330 Hz) and flashes the middle LED green.
- **Pad 2** plays a higher note (392 Hz) and flashes the third LED blue.
- **Pad 0** plays an automated 4-step rhythm loop across the notes and colors!

7.3.3 How the program works

Musical tones with PWM

In Project 1, PWM was used to control LED brightness by changing duty cycle at a fixed frequency. Here, we use PWM on the speaker pin, but instead of changing brightness, we change the **frequency** (the pitch):

Listing 7.1: Playing a tone on the speaker

```
1 pwm = PWM(Pin(PIN_SPEAKER), freq=freq, duty=512)
2 time.sleep_ms(duration_ms)
3 pwm.deinit()
```

A higher frequency makes the speaker vibrate faster, producing a higher musical pitch. A 50% duty cycle (`duty=512`) provides optimal volume. Calling `pwm.deinit()` silences the speaker when the note is done.

RGB LEDs with NeoPixel

The WS2812B LEDs are addressable: a single digital data pin (GPIO 20) controls the color and brightness of all three pixels independently. Colors are specified as (**Red**, **Green**, **Blue**) tuples from 0 to 255:

Listing 7.2: Lighting a pixel

```
1 pixels[pixel_idx] = color
2 pixels.write()
```

Rhythm loops

Pad 0 reads a sequence of note indices and timing delays stored in a Python tuple:

Listing 7.3: Rhythm loop sequence

```
1 LOOP = (
2     (0, 80), # Pad 0, rest 80 ms
3     (2, 60), # Pad 2, rest 60 ms
4     (1, 80), # Pad 1, rest 80 ms
5     (2, 120), # Pad 2, rest 120 ms
6 )
```

When triggered, a `for` loop steps through each element, playing each note and waiting before the next beat.

7.3.4 Hardware test checklist

1. Press Pad 1: You should hear a tone and see the green LED light up.
2. Press Pad 2: You should hear a higher tone and see the blue LED light up.
3. Press Pad 0: You should hear the 4-step beat loop play across the different tones and LEDs.
4. Check serial output in the IDE to verify that button presses are detected cleanly without double triggers.

If something does not work:

- **No sound from speaker:** Check that the speaker red lead is in **C26** and jumpered from **I4** to **E26** (GPIO 10). Check that the black lead is in **C28** and grounded to the top rail via **top-28** to **E28**.
- **LED strip does not light:** Check that the strip is seated in F22–F24 with DI in **F23** and connected to GPIO 20 (**I7** to **J23**), power to 3.3V (**I3** to **J22**), and GND to the top rail (**top-24** to **J24**).
- **Button press does nothing:** Verify button orientation and connections. Check that the microcontroller GND wire (**I2** to **top-2**) is connected to the top rail, and each button ground jumper is connected.

7.4 Review

In this project, you constructed a multi-component digital instrument combining inputs (pushbuttons) with two different types of outputs (PWM audio on a speaker and addressable RGB LEDs). You learned how frequency determines pitch, how to drive NeoPixel LEDs, and how to program sequenced loops.

7.5 Possible Extensions

- **Custom melodies:** Modify the `LOOP` tuple in `project_4_pocket_dj.py` to create your own custom beats or jingles.
- **Scale selector:** Add higher or lower octaves by doubling or halving the frequencies in `PADS`.
- **DJ light show:** Update `play_note` to create visual ripple effects where non-playing LEDs pulse with complementary colors.

Chapter 8: Project 5: Wi-Fi Mood Lamp

8.1 Overview

In this project, your ESP32-C3 becomes both a Wi-Fi access point and a light controller. After uploading a Python file plus one HTML dashboard file, you will connect your phone or laptop to the microcontroller's network, open a local web page, and control a chain of three WS2812B LEDs.

You will build:

- A password-protected Wi-Fi network hosted by the ESP32-C3
- A local web dashboard served directly from the board
- Manual lighting controls for all LEDs together and for each LED individually
- A set of built-in animations (breathing, rainbow, wipe, and blink)

By the end, you will have a complete wireless “mood lamp” that works without internet.

8.2 Components

- Seed XIAO ESP32-C3 microcontroller
- 3-pixel WS2812B LED strip
- Breadboard
- Jumper wires

8.3 Directions

8.3.1 Creating the circuit

Before starting, remove components from earlier projects that are no longer needed.

Attach the microcontroller to the breadboard

Orient the microcontroller so that the pin labeled **5V** goes into hole **H1** (Column H, Row 1), **GPIO2** into **D1**, **GPIO20** into **H7**, and **GPIO21** into **D7**. Then press it down—this takes more force than you might expect.

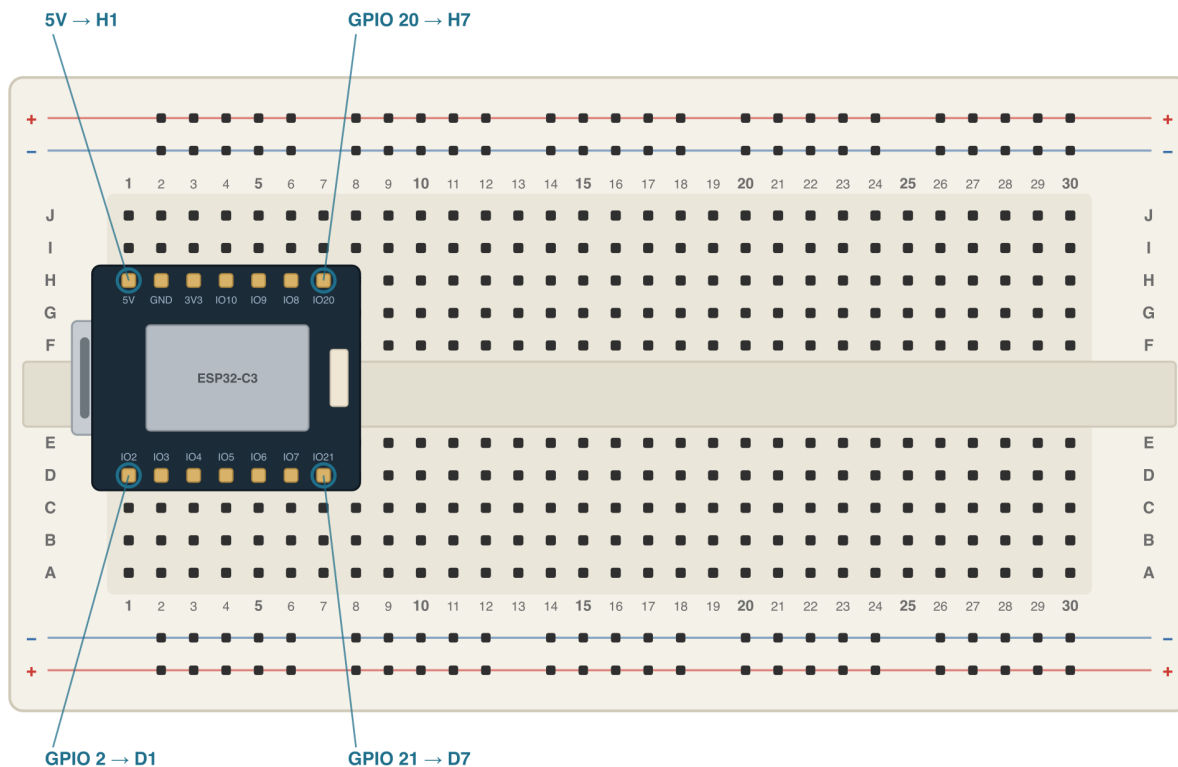


Figure 8.1: So far, so good!

WS2812B strip wiring

The LED strip has a right-angle header so it stands upright once seated. Push those three pins into the top half of the board: **5V** into **J12**, **DI** into **J13**, and **GND** into **J14**. Then add these connections:

WS2812B pin	XIAO pin	Jumper holes
5V	5V	I1 → I12
DI	GPIO 20	I7 → I13
GND	GND	I2 → I14

- **Global controls:** Set color and brightness for all LEDs at once
- **Per-LED controls:** Set each LED independently
- **Animation controls:** Start/stop breathing, rainbow, wipe, and blink

Tip: If many students are in the room, the unique suffix in the SSID helps you identify your own board quickly.

8.4 Review

In this project, you combined embedded networking and LED control in one program. You practiced:

- Hosting a Wi-Fi access point directly on an ESP32-C3
- Serving a local web interface from a microcontroller
- Parsing user commands from HTTP requests
- Driving WS2812B LEDs with both static colors and animated effects
- Designing a system that is interactive, wireless, and real-time

8.5 Possible Extensions

- Add a “favorites” list of saved color presets
- Add a timed auto-off feature (for example, sleep after 30 minutes)
- Add a “party mode” that randomly cycles between multiple effects
- Add an ambient light sensor and auto-adjust brightness
- Add a physical button that toggles between saved scenes without opening the web page

Chapter 9: Project 6: ESP-NOW Hot Potato

9.1 Overview

This project is a placeholder for Project 6 (ESP-NOW Hot Potato). A multiplayer wireless game where a countdown timer is passed between boards using the ESP-NOW protocol. The student holding the “potato” when the timer hits zero loses!

9.2 Directions

9.2.1 Creating the circuit

9.2.2 Programming the microcontroller

Click on the file named "project_6_hot_potato.py" and run it using the IDE. Refer back to Chapter 3 for IDE instructions.

9.3 Review

9.4 Possible Extensions

Chapter 10: Project 7: Tilting Ball Maze

10.1 Overview

This project is a placeholder for Project 7 (Tilting Ball Maze). Students will use an MPU-6050 accelerometer/gyro and an OLED screen to draw a maze with a ball sprite that moves as the board is tilted.

10.2 Directions

10.2.1 Creating the circuit

10.2.2 Programming the microcontroller

Click on the file named "project_7_tilting_ball_maze.py" and run it using the IDE. Refer back to Chapter 3 for IDE instructions.

10.3 Review

10.4 Possible Extensions

Appendix A: Python Primer

If you're new to Python, this section will give you a few things you should know in order to better understand the projects in this guide. This is by no means a complete or comprehensive look at the Python language. For that, we recommend looking at the official Python site and reading through the tutorial there.

Note: for the projects being used here, we are using an implementation of Python known as MicroPython. This version is meant to run on microcontrollers with limited resources. It also has built into it libraries for dealing with hardware devices that are not part of the standard CPython distribution. Therefore, not all Python examples you find online will run on your microcontroller and not all projects for a microcontroller can be run on your computer. But a lot of the code can be shared so the lessons you learn here can apply to other Python projects.

Here is a sample of a small Python script. We will dissect and explain what each section does below:

Listing A.1: An example Python script

```
1 def show(message, repeat=1):
2     """This function prints the given message to the
3     console as many times as specified in the
4     srepeat parameter.
5     """
6
7     for iteration in range(0, repeat):
8         print(iteration, message)
9
10 name = input("What is your name: ")
11 show(name)
12 show(name, repeat=3)
```

On line 1, we are defining a function named `show`. This function accepts two parameters, `message` and `repeat`. The `message` parameter is required and the `repeat` parameter is optional with a default value of 1.

Lines 2 through 5 comprise the docstring for the function. This information is meant for programmers to read and explains what the function does. It does not affect how the function works.

Line 7 starts a loop. The loop will repeat the statements in the loop body until a condition is met. In this case, it will loop until it has performed the operation for each repeat.

Line 8 is the body of the loop. This statement will print the message that the user passed in to the console along with the iteration number of the loop.

Line 10 prompts the user for their name and saves the result in a variable called `name`.

Line 11 calls our `show` function which will print the user's name once (the default).

Line 12 calls our `show` function again, this time saying that we want to repeat the loop of printing the name twice.

Running the program, we will see output like this:

```
$ python program.py
What is your name: Emily
0 Emily
0 Emily
1 Emily
2 Emily
$
```

Another feature that you'll see used often in Python are classes. Classes are a convenient way to model something in your program that holds state and implements functionality. For example, let's say that we are writing a game about racing go-karts. We need to allow each player to have their own kart and keep track of how fast it is going, which way they are turning, and allow the kart to speed up and slow down. Here is a small class that will help us do that:

Listing A.2: An example of a Python class

```
1 class Kart:
2     MAXIMUM_SPEED = 100
```

```

3
4     def __init__(self):
5         """The kart starts motionless at the beginning"""
6         self._speed = 0
7         self._direction = 0
8         self._acceleration = 0
9
10    def brake(self):
11        """This is called when the user presses the brake button"""
12        self._acceleration = -5
13
14    def accelerate(self):
15        """This is called when the user presses the accelerator button"""
16        self._acceleration = 5
17
18    def steer(self, direction):
19        """This is called when the user presses left or right"""
20        self._direction = direction
21
22    def update(self, ticks):
23        """Update will be called by our game engine and will be
24        provided the number of ticks since it was last called.
25        """
26
27        self._speed += self._acceleration * ticks
28
29        # limit our speed so that we don't go faster than our
30        # kart is allowed to, or slower than 0
31        if self._speed > Kart.MAXIMUM_SPEED:
32            self._speed = Kart.MAXIMUM_SPEED
33        if self._speed < 0:
34            self._speed = 0

```

Looking at this class, there are 5 methods. The first one (on line 4) is a special method that is called by the Python interpreter whenever a new Kart is created. It will initialize some variables for this particular Kart object.

You may have noticed that the first method takes a parameter called "self". This is the first parameter of all methods in a class in Python. It is automatically passed by the interpreter and is a reference to the current object. It lets us access the variables that belong to the class, like those we defined in the `__init__` method.

Speaking of the variables in the `__init__` method. Notice how we named them all with an underscore? This is a convention in Python that says they are private to our class and that code written outside of the class shouldn't access them directly. That means that our class should provide ways to modify or read these variables via other methods.

The second method starts on line 10. This is called when the player presses the brake button on their controller and will set our Kart's acceleration to a negative value so that we start to slow down. It modifies the private `_acceleration` member of the class.

The third starts on line 14. It is the opposite of braking and will start speeding our Kart up when the user presses the accelerator. It also modifies the private `_acceleration` member of the class.

The fourth method, line 18, is again something to deal with user input. This time we can see that it takes a second parameter, `direction`. If the user presses left on their controller, then we can expect left to be passed here. The same for right. We will modify the private `_direction` member here.

Finally, we have a fifth method starting on line 22. This method is called by our game engine and uses the class members to determine what happens to the Kart throughout the game. That is, it is asking the Kart to update itself at a certain moment in time (usually once per frame) so that next time it draws it to the screen, it will be in the updated location.

Notice in the last method, we are accessing not only our own variables, `_speed`, and `_acceleration`, but we are also reading a class variable, `Kart.MAXIMUM_SPEED`. Unlike our member variables, a class variable is the same for all instances of a class. It is useful here to keep the game fair so that all Karts have the same limitation on their speed.