MATLAB INTERFACE FOR RPL DODAG VISUALIZATION

Software: NetSim Standard v13.1(64bit), Visual Studio 2019, MATLAB R2015b or higher

Project Download Link:

https://github.com/NetSim-

TETCOS/RPL_DODAG_Visualization_in_IOT_v13.0/archive/refs/heads/main.zip

Follow the instructions specified in the following link to download and setup the Project in NetSim:

https://support.tetcos.com/en/support/solutions/articles/14000128666-downloading-and-setting-up-netsim-file-exchange-projects

Introduction

RPL (Routing Protocol for Low-Power and Lossy Networks) is a routing protocol for wireless networks with low power consumption and generally susceptible to packet loss. It is a proactive protocol based on distance vectors and operates on IEEE 802.15.4, optimized for multi-hop and many-to-one communication, but also supports one-to-one messages.

This protocol is specified in RFC 6550 with special applications in RFCs 5867, 5826, 5673 and 5548. RPL can support a wide variety of link layers, including those with limitations, with potential losses or that are used in devices with limited resources. This protocol can quickly create network routes, share routing knowledge and adapt the topology in an efficient way.

RPL creates a topology similar to a tree (DAG or directed acyclic graph). Each node within the network has an assigned rank (Rank), which increases as the teams move away from the root node (DODAG). The nodes resend packets using the lowest range as the route selection criteria.

The DODAG formed as part of RPL protocol in NetSim can be visualized by interfacing NetSim with MATLAB.

Steps to simulate

 Add the following MATLAB install directory path in the Environment PATH variable <MATLAB_INSTALL_DIRECTORY>\bin\win64
 For eg: C:\Program Files\MATLAB\R2020a\bin\win64




Figure 1: Environment variable PATH

Note: If the machine has more than one MATLAB installed, the directory for the target platform must be ahead of any other MATLAB directory (for instance, when compiling a 64-bit application, the directory in the MATLAB 64-bit installation must be the first one on the PATH).

- 2. Open Command prompt as admin and execute the command "matlab -regserver". This will register MATLAB as a COM automation server and is required for NetSim to start MATLAB automation server during runtime.
- 3. Open the Source codes in Visual Studio by going to Your work-> Source Code and Clicking on Open code button in NetSim Home Screen window.
- 4. Right click on the solution in the solution explorer and select Rebuild.

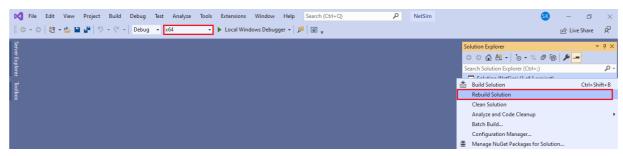


Figure 2: Screen shot of NetSim project source code in Visual Studio

5. Upon rebuilding, **RPL.dll** will automatically be updated in the respective bin folder of the current workspace.

Example

- The RPL_DODAG_Visualization_in_IOT_v13.1 comes with a sample network configuration that are already saved. To open this example, go to Your work in the Home screen of NetSim and click on the DODAG_Visualization_Example from the list of experiments.
- · The saved network scenario consists of
 - a. 5 Wireless Sensor Nodes
 - b. 16_LOWPAN Gateway
 - c. 1 Routers
 - d. 1 wired node

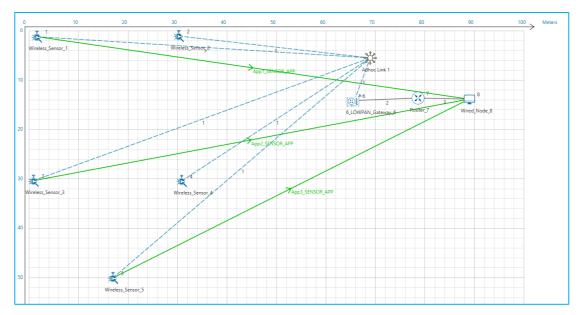


Figure 3: Network Scenario

Run Simulation.

Results and discussion

A plot will open, showing the DODAG when the simulation is started, and the first route is formed between sink node and the sensor. And the DODAG will be dynamically updated. The DoDAG gets plotted in MATLAB as shown below:

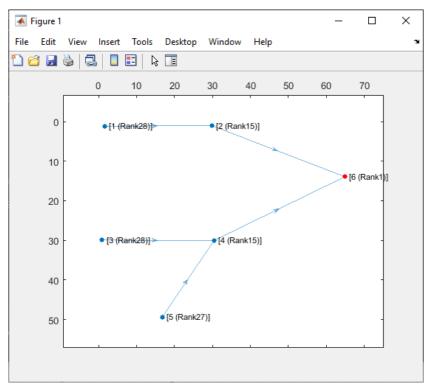


Figure 4: Plot of DODAG Formation in MATLAB

Added MATLAB Functions (), in DoDAG_Plot.c file, within RPL project

```
/* Which takes care of interactions with MATLAB* /
double fn_netsim_matlab_DODDAG_run()
char theArray[BUFSIZ * 2], Xc[BUFSIZ * 2], Yc[BUFSIZ * 2];
char H[BUFSIZ * 2], nID[BUFSIZ * 2], nRank[BUFSIZ * 2];
char command[BUFSIZ], output[BUFSIZ];
unsigned int i, j = 0;
i = 0;
dcounti = 0;
sprintf(Xc, "Xc=[");
sprintf(Yc, "Yc=[");
sprintf(theArray, "theArray=[");
sprintf(nID, "nID=[");
sprintf(nRank, "nRank=[");
while (dcounti < NETWORK->nDeviceCount)
if (!(isSENSOR(dcounti) || isSINKNODE(dcounti)))
dcounti++;
continue;
i = 0;
dcounti = 0;
while (dcountj < NETWORK->nDeviceCount)
if (!(isSENSOR(dcountj) || isSINKNODE(dcountj)))
dcountj++;
continue;
if (is_prefparent(NETWORK->ppstruDeviceList[dcounti]->nDeviceId, NETWORK-
>ppstruDeviceList[dcountj]->nDeviceId))
sprintf(theArray, "%s%d,", theArray, 1);
else
{
sprintf(theArray, "%s%d,", theArray, 0);
j++;
dcountj++;
PRPL_NODE rpl = GET_RPL_NODE(NETWORK->ppstruDeviceList[dcounti]->nDeviceId);
if (isSINKNODE(dcounti))
sprintf(nRank, "%s%d,", nRank, 1);
```

```
else if (rpl->joined_dodag != NULL)
sprintf(nRank, "%s%d,", nRank, rpl->joined_dodag->rank);
else
sprintf(nRank, "%s%d,", nRank, 0);
sprintf(Xc, "%s%lf,", Xc, DEVICE_POSITION(NETWORK->ppstruDeviceList[dcounti]-
>nDeviceId)->X);
sprintf(Yc, "%s%lf,", Yc, DEVICE_POSITION(NETWORK->ppstruDeviceList[dcounti]-
>nDeviceId)->Y);
sprintf(nID, "%s%d,", nID, NETWORK->ppstruDeviceList[dcounti]->nConfigDeviceId);
if (isSINKNODE(dcounti))
sprintf(H, "H=\%d;", i + 1);
sprintf(theArray, "%s;", theArray);
i++:
dcounti++;
sprintf(Xc, "%s];", Xc);
sprintf(Yc, "%s];", Yc);
sprintf(nID, "%s];", nID);
sprintf(nRank, "%s];", nRank);
sprintf(theArray, "%s];", theArray);
netsim_matlab_send_ascii_command(Xc);
netsim_matlab_send_ascii_command(Yc);
netsim_matlab_send_ascii_command(nID);
netsim matlab send ascii command(nRank);
netsim_matlab_send_ascii_command(theArray);
netsim matlab send ascii command(H);
sprintf(command, "output=PlotDAG(theArray,Xc,Yc,H,nID,nRank)");
netsim_matlab_send_ascii_command(command);
netsim_matlab_get_value(output, BUFSIZ, "output", "double");
return 0;
}
double fn_netsim_matlab_finish()
       fprintf(stderr, "\nPress any key to terminate MATLAB process...\n");
       _getch();
       netsim_matlab_interface_close();
       return 0;
}
```

Changes code in fn_netsim_matlab_init() and fn_NetSim_RPL_Finish (), in RPL.c, within RPL project

```
/*RPL Init function initializes the RPL parameters.*/
    _declspec (dllexport) int fn_NetSim_RPL_Init(struct stru_NetSim_Network
        *NETWORK Formal,
    NetSim_EVENTDETAILS *pstruEventDetails_Formal,
    char *pszAppPath_Formal,
    char *pszWritePath_Formal,
    int nVersion_Type,
    void **fnPointer)
    netsim_matlab_interface_configure(pszAppPath);
    fn netsim matlab DODDAG run();
    return fn NetSim RPL Init F();
    }
/*This function is called by NetworkStack.dll, once simulation end to free the allocated memory for
the network*/
     _declspec(dllexport) int fn_NetSim_RPL_Finish()
    fn_netsim_matlab_finish();
    return fn_NetSim_RPL_Finish_F();
```

Changes code to rpl_add_route_to_parent(), in Neighbor.c file. within RPL project

```
rpl_add_route_to_parent(d, dodag->pref_parent->nodeld);
fn_netsim_matlab_DODDAG_run();

for (i = 0; i < rpl->neighbor_count; i++)
{
    PRPL_NEIGHBOR neighbor = rpl->neighbor_list[i];

    if (matching_ranks[i] >= INFINITE_RANK)
{
        if (neighbor->lastDIOMSG != NULL)
        { /* forget messages from other DODAG iterations */
        rpl_dio_pdu_free(neighbor->lastDIOMSG);
        neighbor->lastDIOMSG = NULL;
    }
    continue;
}
```