J1 - installed land pattern - TOP VIEW

Millimetres; origin at component centre. Coordinate tables define pad centres.

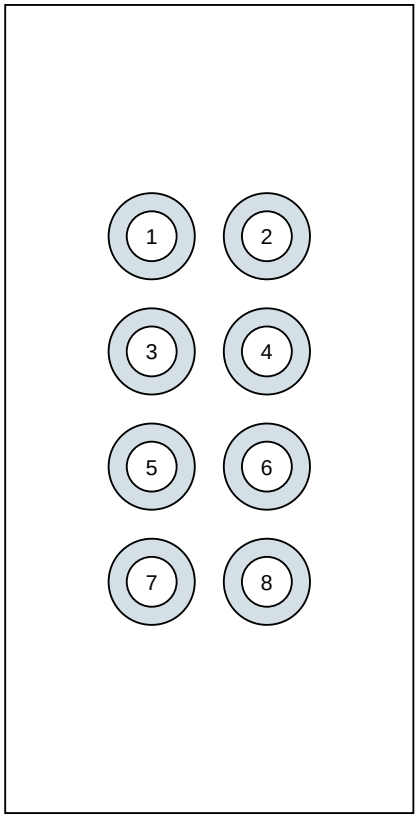

Pin	X	Y(up)	pad W x H
1	-1.270	3.810	1.90 x 1.90
2	1.270	3.810	1.90 x 1.90
3	-1.270	1.270	1.90 x 1.90
4	1.270	1.270	1.90 x 1.90
5	-1.270	-1.270	1.90 x 1.90
6	1.270	-1.270	1.90 x 1.90
7	-1.270	-3.810	1.90 x 1.90
8	1.270	-3.810	1.90 x 1.90

Straight MALE 2x4 shrouded IDC; 2.54 mm pitch and row spacing.

Notch LEFT; contact 1 upper-left. Physical numbering 1,3,5,7 LEFT; 2,4,6,8 RIGHT.

Reference envelope 9.00 x 17.82 mm; finished holes 1.10 mm; square pins 0.64 mm.

Propose economical equivalent with complete keyed cavity/pin-1 drawing and solder-process rating.

Reference: Wuerth 61200821621. No substitute is qualified by pitch alone.

D1 - installed land pattern - TOP VIEW

Millimetres; origin at component centre. Coordinate tables define pad centres.

Pin	X	Y(up)	pad W x H
2 (A)	-0.825	0.000	0.80 x 0.80
1 (K)	0.825	0.000	0.80 x 0.80

POWER yellow-green, 565-575 nm. Anode LEFT; cathode RIGHT.

0603 / 1608 body; pads 0.80 x 0.80 mm; pad centre spacing 1.65 mm.

Vf <=2.2 V at 1 mA. Show suitability/brightness at 0.5-1 mA.

Supplier must identify exact MPN and demonstrate polarity/land-pattern compatibility.

D2 - installed land pattern - TOP VIEW

Millimetres; origin at component centre. Coordinate tables define pad centres.

Pin	X	Y(up)	pad W x H
2 (A)	-0.825	0.000	0.80 x 0.80
1 (K)	0.825	0.000	0.80 x 0.80

ACCESS red, 620-635 nm. Anode LEFT; cathode RIGHT.

0603 / 1608 body; pads 0.80 x 0.80 mm; pad centre spacing 1.65 mm.

Vf <=2.2 V at 1 mA. Show suitability/brightness at 0.5-1 mA.

Supplier must identify exact MPN and demonstrate polarity/land-pattern compatibility.

S1 - installed land pattern - TOP VIEW

Millimetres; origin at component centre. Coordinate tables define pad centres.

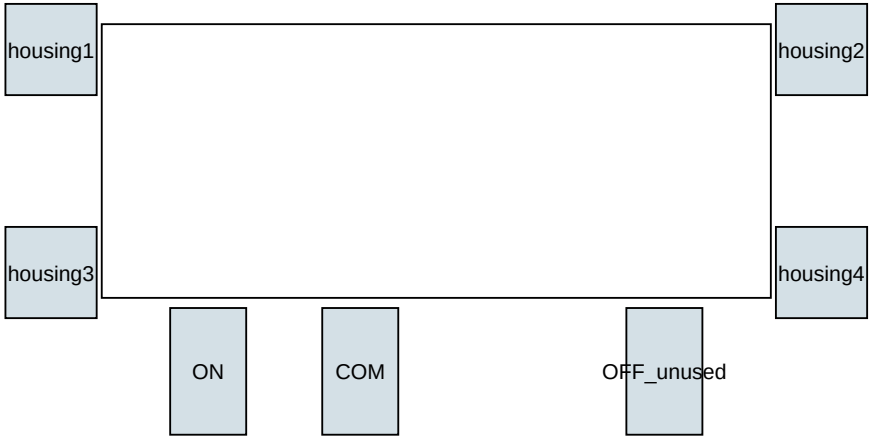

Pin	X	Y(up)	pad W x H
COM	-0.750	-2.075	0.75 x 1.25
ON	-2.250	-2.075	0.75 x 1.25
OFF_unused	2.250	-2.075	0.75 x 1.25
housing1	-3.800	1.100	0.90 x 0.90
housing2	3.800	1.100	0.90 x 0.90
housing3	-3.800	-1.100	0.90 x 0.90
housing4	3.800	-1.100	0.90 x 0.90

Fixed MPN Hroparts K3-1296S-E1. Actuator points UP.

Two NPTH locating holes: diameter 0.90 mm; centres (-1.50,0) and (+1.50,0).

COM connects to 3V3_IN; ON to POWER_SWITCHED; OFF pad electrically unused.

All four metal housing tabs are soldered to GND.

S2 - installed land pattern - TOP VIEW

Millimetres; origin at component centre. Coordinate tables define pad centres.

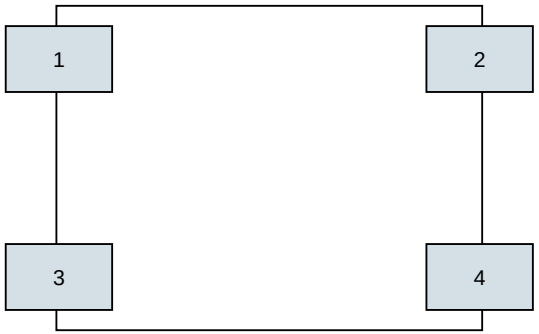

Pin	X	Y(up)	pad W x H
1	-2.075	1.075	1.05 x 0.65
2	2.075	1.075	1.05 x 0.65
3	-2.075	-1.075	1.05 x 0.65
4	2.075	-1.075	1.05 x 0.65

Fixed MPN ALPS SKRPACE010. Momentary normally open; gate circuit only.

Physical 1-2 internally common; physical 3-4 internally common.

Logical Fritzing IDs are not the physical manufacturer numbering.