

Reference audio



$x[n] \cdot \text{native rate}$

Candidate encoding



Measured bytes $B(c)$

Alignment-aware comparison


Common time grid



Fixed delay



Full duration

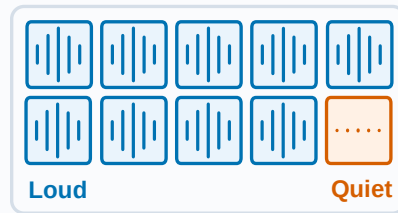

Loud

Quiet

Reference active frames



Global fidelity

Global SNR ≥ 20 dB

Temporal tail

Tail SNR ≥ 15 dB

Evaluate fidelity

Both constraints pass



Smallest feasible file