


DC BRUSHLESS FAN 40×40×20mm (BD4020)

Dimensions:mm

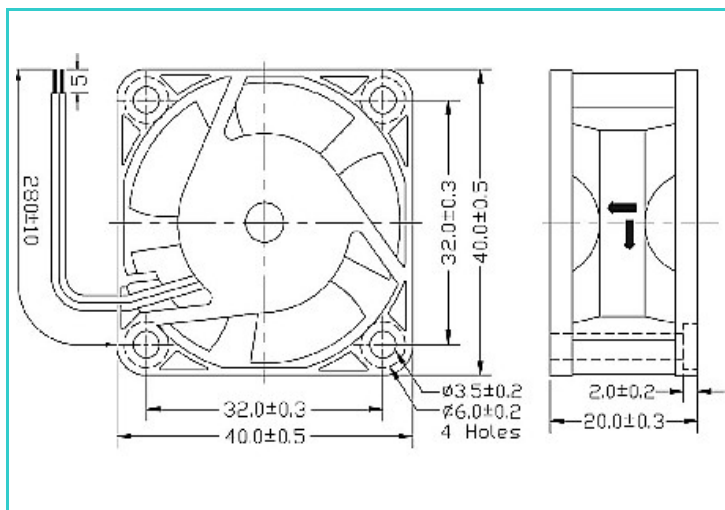

DC FAN GENERAL DATA

Frame Type: Black PBT (UL94V-0)

Impeller: Black PBT (UL94V-0)

Bearing: Ball Bearing (1 Ball, 2 Ball) & Sleeve Bearing

Insulation Resistance: 10M at 500VDC

Dielectric Withstand: Between lead or terminal and housing

700VAC for 3 sec or 500 VDC for 1 min

Life Expectancy: Ambient temperature 25℃ and humidity 65%

Sleeve bearing: 30,000 Hours

1 Ball bearing: 40,000 Hours

2 Ball bearing: 50,000 Hours

Operation Temperature: -10℃~70℃ (Ordinary humidity)

Storage Temperature: -40℃~80℃ (Ordinary humidity)

Lead wire: UL 1007AWG#24/26,+: Red,-: Black ,Y: Yellow

Safety: CE approved, RoHS

Ingress of Protection: IP44

SPECIFICATION

S: Sleeve Bearing D: 1 Ball Bearing B: 2 Ball Bearing

Frame size (mm)	Speed Define	Bearing Type			Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Pressure (mm-H ₂ O)	Noise (dBA)	Weight (g)
尺寸	类别	S	D	B	电压	电流	功率	转速	风量	风压	噪声	重量
40×40×20 (BD4020)	H	✱		✱	5	0.16	0.80	7000	7.80	5.88	30.40	23
	M	✱		✱	5	0.12	0.60	6000	6.69	4.56	26.20	23
	L	✱		✱	5	0.09	0.45	5000	5.59	3.25	25.60	23
	H	✱		✱	12	0.09	1.08	7000	7.80	5.88	30.40	23
	M	✱		✱	12	0.07	0.84	6000	6.69	4.56	26.20	23
	L	✱		✱	12	0.06	0.72	5000	5.59	3.25	25.60	23
	H	✱		✱	24	0.13	3.12	7000	7.80	5.88	30.40	23
	M	✱		✱	24	0.11	2.64	6000	6.69	4.56	26.20	23
	L	✱		✱	24	0.09	2.16	5000	5.59	3.25	25.60	23