

IntelliCane

Smart Assistive Cane with Haptic Obstacle Avoidance, Fall Detection, and a Mobile App for Blind Users and their Caretakers

Team Neural-Nexus | Track A: Embedded IoT System Development | IoTrix 2.0

Members: Dulnith Liyanage, Thenul Senadheera, Chamith Ranasinghe, Suneth Pathirana

Repository: <https://github.com/Neural-Nexus-IoTrix-2-0/intellicane> | Submission Date: 5 October 2026

1. Problem Definition & Intended Use Case

Visually impaired individuals encounter hazardous obstacles during daily mobility, including low-lying clutter, knee-to-waist hazards, and sudden vertical drops. Furthermore, accidental cane drops or user falls can leave individuals stranded without immediate assistance. Existing commercial Electronic Travel Aids (ETAs) present three critical shortcomings: (1) prohibitive acquisition costs often exceeding \$500 USD (LKR 150,000+), (2) architectural reliance on cloud connectivity for basic hazard detection, and (3) acoustic audio spam that obstructs natural hearing.


IntelliCane addresses these issues directly. It provides an ultra-low-cost (LKR 2,800 bench electronics), 100% offline-safe assistive white cane that pairs real-time haptic obstacle guidance and inertial fall detection with a dedicated companion Android mobile application for blind users and their caretakers.

2. Proposed Solution & System Overview

The IntelliCane ecosystem integrates an intelligent embedded controller on the cane with a dual-mode companion smartphone application:

- Safety-Critical Cane Reflex (ESP32-C3):** Executes a sub-50 ms deterministic loop. An HC-SR04 ultrasonic transceiver detects forward hazards up to 4 meters, driving a 3-pin vibration motor via 200 Hz hardware LEDC PWM that scales smoothly between 60 cm and 10 cm. A 6-axis MPU6050 IMU detects cane impact and orientation ($> 65^\circ$ tilt) to trigger an emergency buzzer, with auto-recovery ($< 30^\circ$).
- Companion Android Application** (com.example.intellicane): Connects wirelessly over Bluetooth Low Energy (BLE 5.0 Nordic UART Service). Operates in two dedicated modes:
 - Blind User Mode:* Accessible interface broadcasting cane battery, connection status, and emergency assistance controls.
 - Caretaker Mode:* Real-time terminal telemetry monitor, emergency fall alerts via Firebase Cloud Messaging, and an interactive OpenStreetMap (OSMDroid) tracking map using the smartphone's native A-GPS—eliminating the cost and power draw of a standalone hardware GPS module.

3. System Architecture & Data Flow

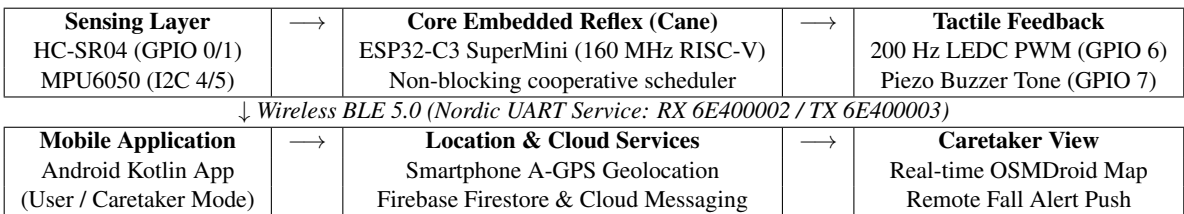

4. Hardware Implementation & Circuit Design

The cane hardware is designed around the stamp-sized **ESP32-C3 SuperMini** powered by a regulated 5 V rail:

- Ultrasonic Ranging (HC-SR04):** Triggered via 10 μ s pulses on GPIO 0. The 5 V Echo output is scaled to safe 3.21 V logic using a dedicated precision resistor divider ($R_1 = 1\text{ k}\Omega$, $R_2 = 1.8\text{ k}\Omega$) connected to GPIO 1.
- Inertial Motion Sensor (GY-521 MPU6050):** Communicates over hardware I2C (SDA: GPIO 4, SCL: GPIO 5) at 100 kHz. AD0 is grounded to set address 0x68. A custom direct-register fallback driver ensures resilience against clone ICs and bus lockups.
- Tactile Haptic Motor Module:** 3-pin vibration motor module with onboard MOSFET driver powered from 5 V; gate modulated via GPIO 6 at 200 Hz PWM, providing gradual spatial perception without hand numbness.
- Audible Hazard Alarm:** Active/passive 3.3 V buzzer on GPIO 7 provides urgent pulsed alerts ($< 30\text{ cm}$ and fall states).

5. Firmware Architecture & Control Logic

The firmware (firmware/core-sensing/core-sensing.ino) operates with zero blocking delay() calls, utilizing a cooperative time-sliced scheduler:

- Task Rates:** Ultrasonic ranging @ 20 Hz (50 ms), IMU tilt tracking @ 50 Hz (20 ms), Actuator PWM updates @ 100 Hz (10 ms), and BLE telemetry transmission @ 10 Hz (100 ms).

- **Proportional Ramping Equation:** The PWM duty cycle ramps monotonically as obstacle distance d decreases:

$$\text{PWM Duty} = \text{constrain} \left(255 - \frac{d - d_{\min}}{d_{\max} - d_{\min}} \times (255 - \text{PWM}_{\min}), \text{PWM}_{\min}, 255 \right) \quad (d_{\min} = 10\text{cm}, d_{\max} = 60\text{cm})$$

- **Fall Detection & Self-Clearing Logic:** Sustained tilt $> 65^\circ$ or impact acceleration $> 2.5g$ initiates a 1.5 s confirmation timer. When triggered, the emergency buzzer pulses continuously. Restoring the cane upright ($< 30^\circ$) automatically clears the alarm.

6. Companion Mobile Application (application/)

The native Android application is structured in Kotlin (com.example.intellicane) to bridge IoT telemetry:

- **BLE GATT Central Client:** Auto-discovers Intelligent-Cane, connects to the Nordic UART Service, and parses incoming telemetry packets: DIST: XX.Xcm | TILT: XX.Xdeg | FALL: X | MOTOR: XXX | BUZZ: X | BLE: CONN.
- **Caretaker Dashboard & Map Integration:** Integrates org.osmdroid with live OpenStreetMap tile rendering. Displays the user’s real-time coordinate marker, GPS accuracy circle, battery status, and last-seen timestamp.
- **Firestore Cloud Backend:** Synchronizes state with Firestore and issues push alerts to registered caretakers via MyFirebaseMessagingService.kt upon fall detection.

7. Testing, Validation & Verification Evidence

- **Host Unit Testing** (tests/proximity_feedback_test.cpp): 100% pass across boundary conditions, invalid inputs (NaN, ∞ , negative distances), monotonic PWM progression, motor polarity inversion, and 32-bit millis() rollover resilience.
- **Bench Distance Calibration:** HC-SR04 verified against physical tape measurements from 2 cm to 250 cm with ± 1.5 cm accuracy. Motor PWM engages deterministically at 59.9 cm and hits 100% duty at 10 cm.
- **Tilt Verification:** Calibrated with a digital protractor; fall alarm triggers reliably at $> 65^\circ$ and silences within 200 ms of cane recovery ($< 30^\circ$).
- **Wireless BLE Performance:** Telemetry stream validated at 10 Hz to smartphone with < 25 ms latency and up to 10 m range.

8. Budget & Cost Feasibility

The prototype achieves industry-leading cost efficiency by leveraging the user’s smartphone for GPS and connectivity:

Component	Specification / Purpose	Phase 1 Cost (LKR)		Status
ESP32-C3 SuperMini	RISC-V 160 MHz MCU with BLE 5.0 & Native USB-C	1,400		Deployed & Verified
HC-SR04 Transceiver	Forward ultrasonic obstacle ranging (2–400 cm)	450		Deployed & Verified
GY-521 MPU6050	6-Axis Accelerometer / Gyroscope for tilt & fall	600		Deployed & Verified
3-Pin Vibration Motor	Integrated driver module (200 Hz LEDC PWM)	250		Deployed & Verified
Piezo Buzzer & Resistors	High-urgency audio hazard tone & 1k Ω /1.8k Ω divider	100		Deployed & Verified
Total Electronics Cost	Safety-Critical Bench Prototype	LKR 2,800	Budget Ceiling: LKR 35,000	

9. Limitations, Risks & Mitigations

- **Ultrasonic Specular Scattering:** Sound waves can scatter on angled soft fabrics beyond 2 meters. *Mitigation:* For the final build, a Time-of-Flight (ToF) laser ranging sensor will be integrated as a complementary secondary channel.
- **Breadboard Jumper Durability:** Prototype jumpers can loosen under prolonged mechanical tapping. *Mitigation:* Migrating to a custom two-layer PCB and vibration-isolated enclosure before the final competition.
- **Smartphone Disconnection:** If the phone battery depletes, remote caregiver tracking stops. *Mitigation:* Core obstacle avoidance and local audio-visual fall alarms remain 100% operational offline on the cane.

10. Roadmap Prior to the Final (17 October 2026)

1. **Hardware Enclosure & Custom PCB:** Fabricate a custom PCB and 3D-print an ergonomic cane handle housing with TPU shock damping.
2. **End-to-End Caretaker Alert Flow:** Finalize Firestore Cloud Functions to dispatch automated SMS and push notifications upon verified fall events.
3. **Battery Optimization:** Integrate an 18650 Li-ion cell with TP4056 charging circuit and configure ESP32-C3 Light Sleep for > 24 hour operation.

GitHub Repository Link: <https://github.com/Neural-Nexus-IoTrix-2-0/intellicane>