
LAPORAN P9

Anggota:
-Neilvent Victor Chenarias (2510101007)
-Putra Maliki ramadhan (2510101049)

Topologi

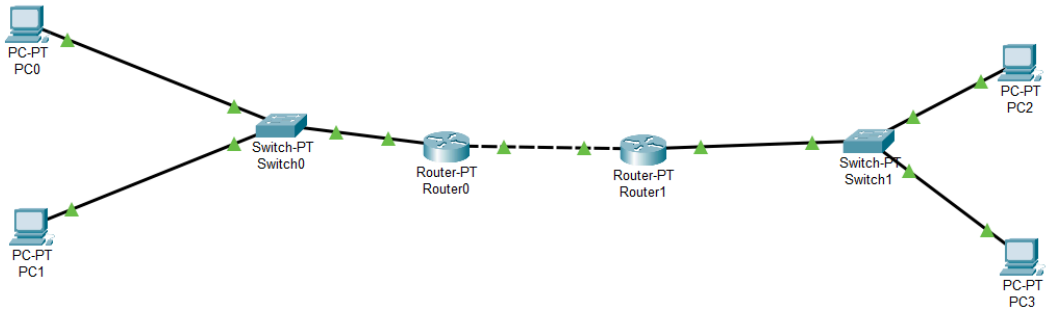


Tabel IP Address


Device	IP Address	Default Gateaway	Interface
PC0	192.168.10.2	192.168.10.1	FastEthernet0
PC1	192.168.10.3	192.168.10.1	FastEthernet0
PC2	192.168.20.2	192.168.20.1	FastEthernet0
PC3	192.168.20.3	192.168.20.1	FastEthernet0
router0 LAN 1	192.168.10.1		FastEthernet1/0
router0 WAN	10.10.10.1		FastEthernet0/0
router1 LAN 2	192.168.20.1		FastEthernet1/0
router1 WAN	10.10.10.2		FastEthernet0/0

Konfigurasi yang digunakan:

Router0:

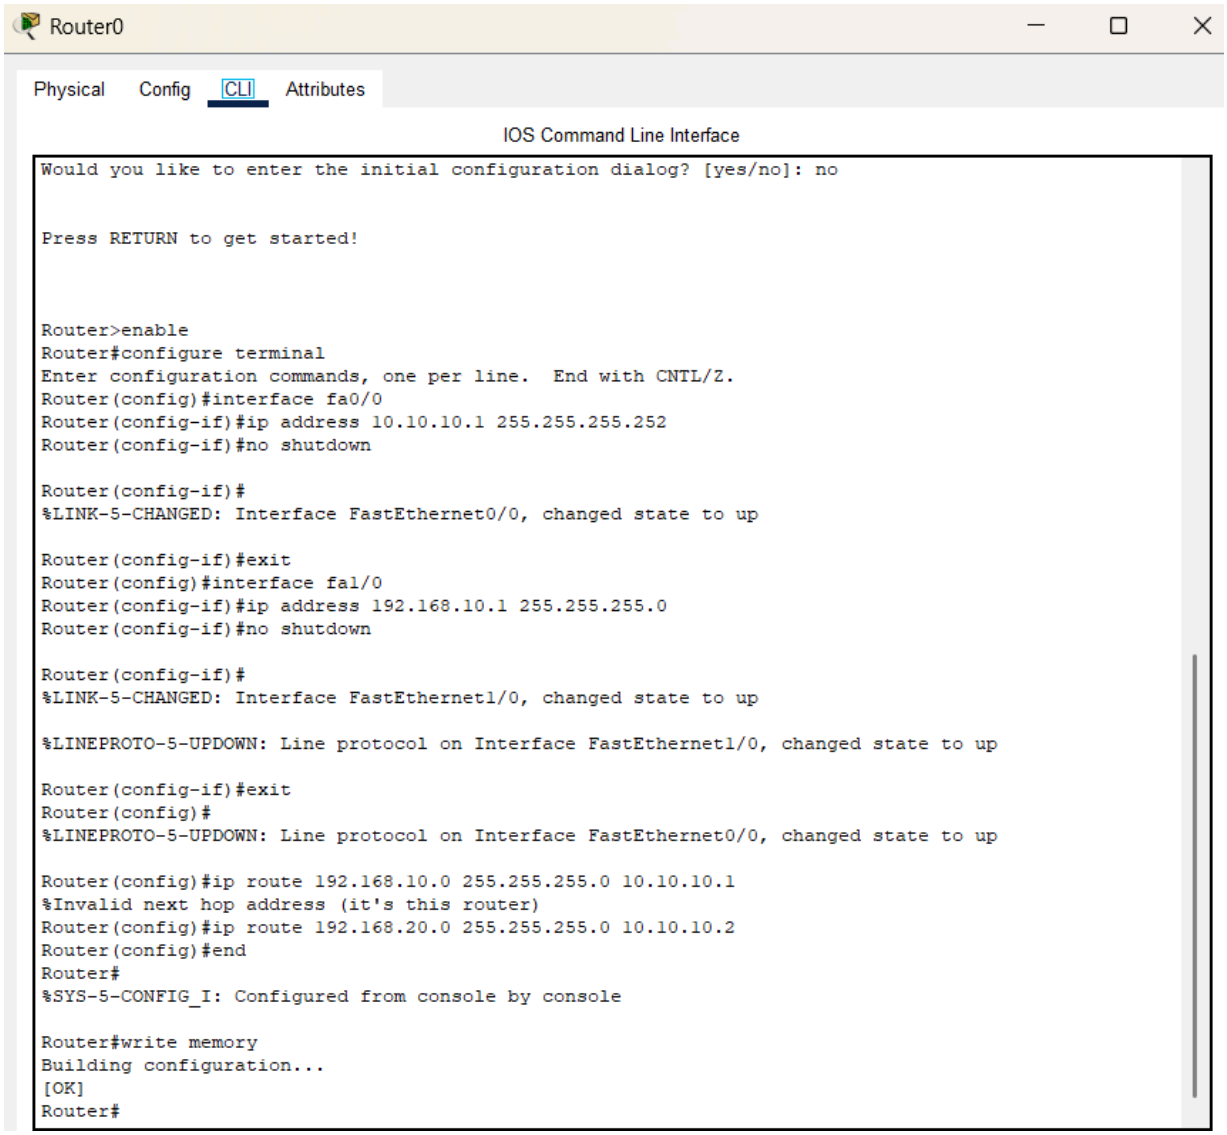



Router1

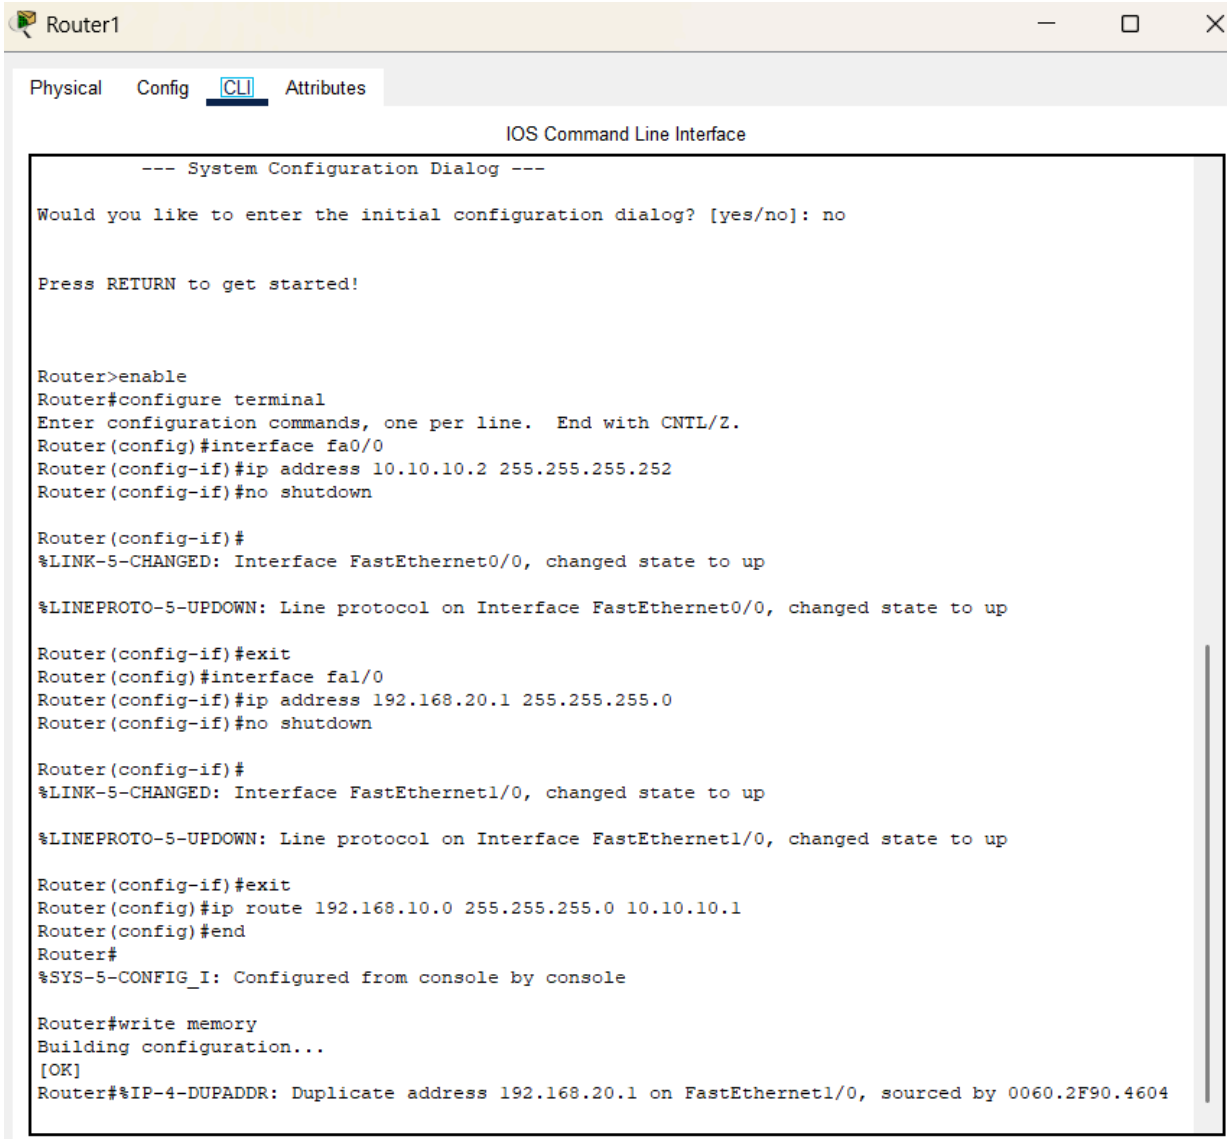
Router1
Physical
Config
CLI
Attributes
IOS Command Line Interface
--- System Configuration Dialog ---
Would you like to enter the initial configuration dialog? [yes/no]: no
Press RETURN to get started!
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface fa0/0
Router(config-if)#ip address 10.10.10.2 255.255.255.252
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
Router(config-if)#exit
Router(config)#interface fa1/0
Router(config-if)#ip address 192.168.20.1 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet1/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet1/0, changed state to up
Router(config-if)#exit
Router(config)#ip route 192.168.10.0 255.255.255.0 10.10.10.1
Router(config)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console
Router#write memory
Building configuration...
[OK]
Router#%IP-4-DUPADDR: Duplicate address 192.168.20.1 on FastEthernet1/0, sourced by 0060.2F90.4604

Screenshot hasil pengujian ping:

PC0 ping ke PC2 & PC3, PC1 ping ke PC2 & PC3

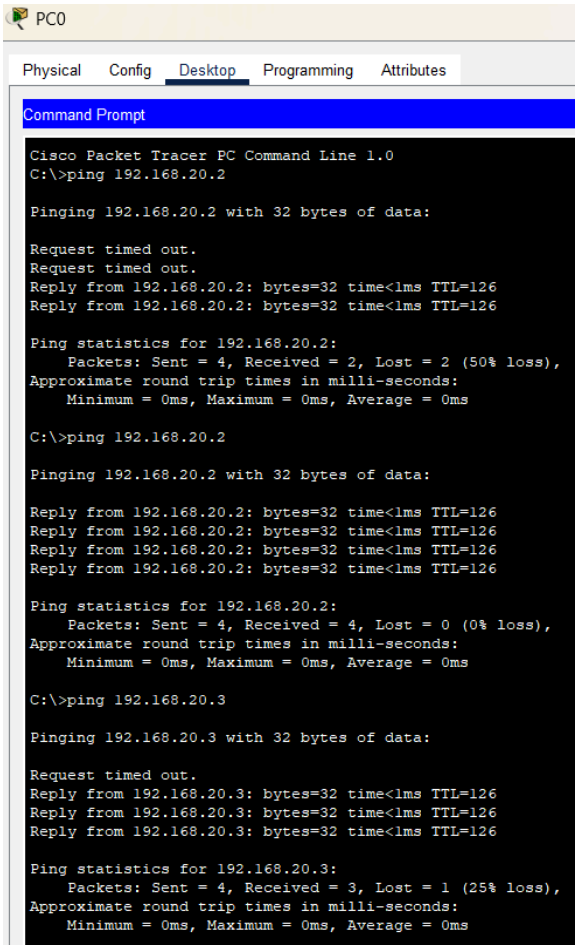

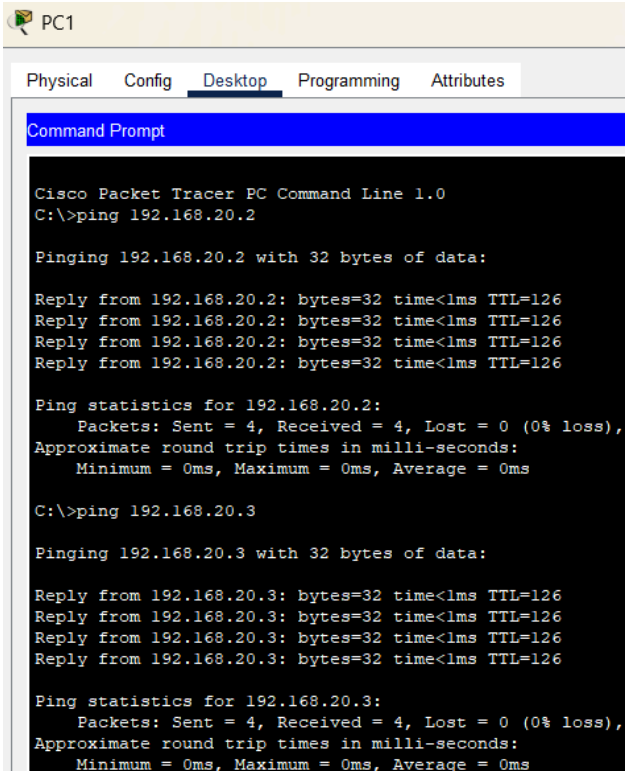

Kesimpulan Singkat:

Sistem memakai penerapan static routing di jalur penghubung antar router. Simulasi berhasil dibangun dengan memakai 4 PC, 2 Switch, dan 2 Router menggunakan interface FastEthernet. Berdasarkan hasil pengujian menggunakan perintah ping, seluruh perangkat PC telah terbukti dapat saling berkomunikasi secara sukses.