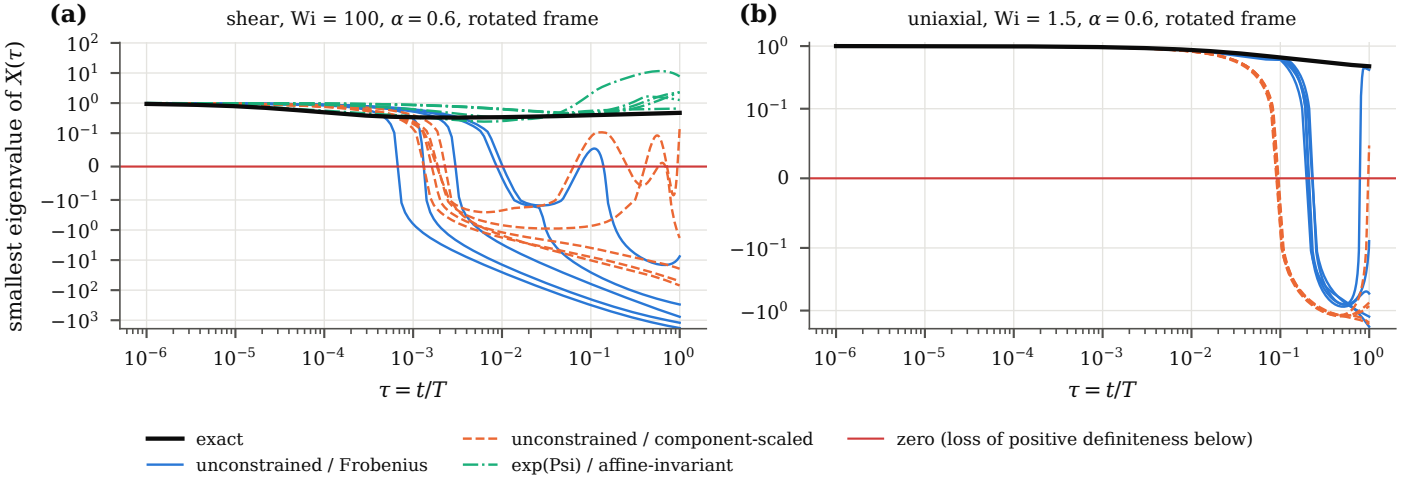
(a)
shear, Wi = 100, α = 0.6, rotated frame
smallest eigenvalue of X(τ)
τ = t/T
(b)
uniaxial, Wi = 1.5, α = 0.6, rotated frame
τ = t/T
exact
unconstrained / Frobenius
unconstrained / component-scaled
exp(Psi) / affine-invariant
zero (loss of positive definiteness below)