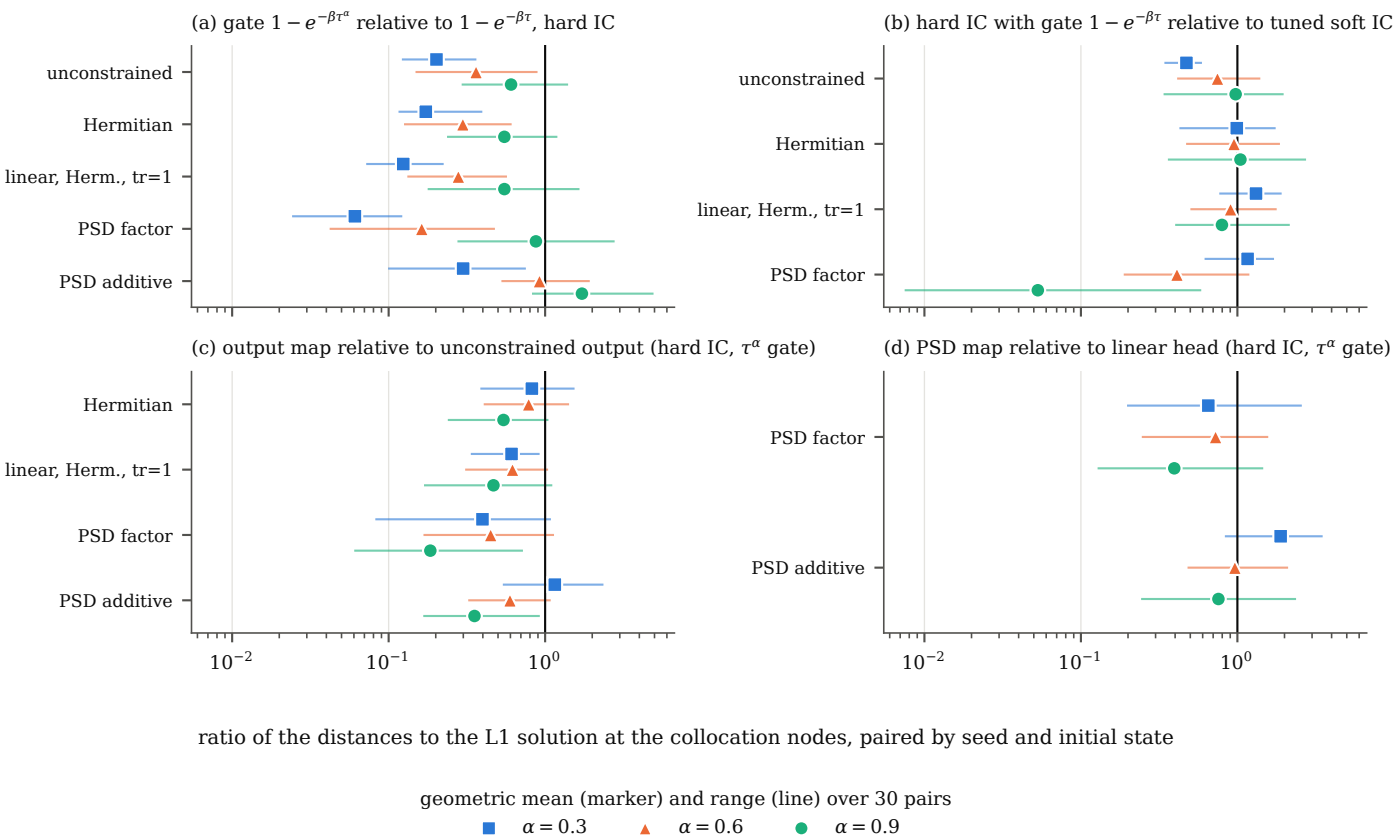
(a) gate $1 - e^{-\beta\tau^\alpha}$ relative to $1 - e^{-\beta\tau}$, hard IC
unconstrained
Hermitian
linear, Herm., tr=1
PSD factor
PSD additive
(b) hard IC with gate $1 - e^{-\beta\tau}$ relative to tuned soft IC
unconstrained
Hermitian
linear, Herm., tr=1
PSD factor
(c) output map relative to unconstrained output (hard IC, τ^α gate)
Hermitian
linear, Herm., tr=1
PSD factor
PSD additive
10^{-2}
10^{-1}
10^{0}
(d) PSD map relative to linear head (hard IC, τ^α gate)
PSD factor
PSD additive
10^{-2}
10^{-1}
10^{0}
ratio of the distances to the L1 solution at the collocation nodes, paired by seed and initial state
geometric mean (marker) and range (line) over 30 pairs
$\alpha = 0.3$
$\alpha = 0.6$
$\alpha = 0.9$