


Revision History

Version	Date	By	Change Dscription
V1.0	2024-09-19	zuozhongkai	1:Initial release version

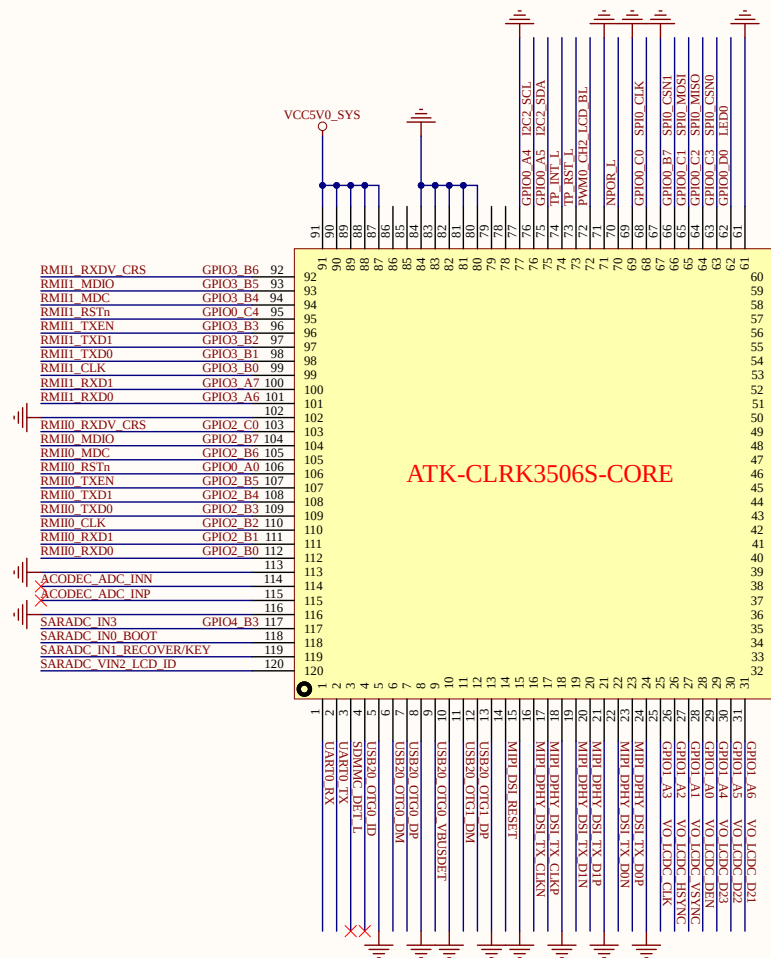

	U1	ATK-CLRK3506S-CORE		
60	GPIO0_B0	SA1I_MCLK		
59	GPIO0_B1	SA1I_SCLK		
58	GPIO0_B2	SA1I_LRCK		
57	GPIO0_B3	SA1I_SDI		
56	GPIO0_B4	SA1I_SD00		
55	GPIO0_B5	I2C0_SCL		
54	GPIO0_B6	I2C0_SDA		
53				
52	GPIO1_D3	D0_LCDC_D0	CAN0_RX	RM_IQ31
51	GPIO1_D2	D0_LCDC_D1	UART3_TX	RM_IQ30
50	GPIO1_D1	D0_LCDC_D2	CAN0_TX	RM_IQ29
49	GPIO1_D0	D0_LCDC_D3		
48	GPIO1_C7	D0_LCDC_D4		
47	GPIO1_C6	D0_LCDC_D5		
46	GPIO1_C5	D0_LCDC_D6		
45	GPIO1_C4	D0_LCDC_D7		
44	GPIO1_C3	D0_LCDC_D8	UART3_TX	RM_IQ28
43	GPIO1_C2	D0_LCDC_D9	UART2_RX	RM_IQ27
42	GPIO1_C1	D0_LCDC_D10		
41	GPIO1_C0	D0_LCDC_D11		
40	GPIO1_B7	D0_LCDC_D12		
39	GPIO1_B6	D0_LCDC_D13		
38	GPIO1_B5	D0_LCDC_D14		
37	GPIO1_B4	D0_LCDC_D15		
36	GPIO1_B3	D0_LCDC_D16	UART2_TX	RM_IQ26
35	GPIO1_B2	D0_LCDC_D17	I2C1_SCL	RM_IQ25
34	GPIO1_B1	D0_LCDC_D18	I2C1_SDA	RM_IQ24
33	GPIO1_B0	D0_LCDC_D19		
32	GPIO1_A7	D0_LCDC_D20	RTC_INT_L	

The schematic diagram illustrates the RTL8733BUAA module, a yellow rectangular component with various pins and internal connections. The module is labeled with 'BT_RF', 'WL_RF', 'CHIP_EN', 'VDD33', 'USB_DM', and 'USB_DP'.

Pin Connections:

- Pin 15:** NC (No Connection)
- Pin 16:** NC (No Connection)
- Pin 17:** NC (No Connection)
- Pin 5:** BT_PCM_IN
- Pin 6:** BT_PCM_OUT
- Pin 7:** BT_PCM_SYNC
- Pin 8:** BT_PCM_CLK
- Pin 9:** BT_WAKE_HOST
- Pin 10:** HOST_WAKE_BT
- Pin 11:** VDD33
- Pin 12:** HUB_DM3
- Pin 13:** HUB_DP3
- Pin 18:** CHIP_EN
- Pin 19:** HOST_WAKE_WL
- Pin 20:** WL_WAKE_HOST

Internal Components and Connections:


- BT_RF Section:** Includes a 10pF capacitor (C1) connected to pin 2 (BT_RF) and a 10pF capacitor (C2) connected to pin 3 (WL_RF). Both capacitors are connected to GND.
- WL_RF Section:** Includes a 10pF capacitor (C3) connected to pin 3 (WL_RF) and a 10pF capacitor (C4) connected to pin 6 (BT_PCM_OUT). Both capacitors are connected to GND.
- CHIP_EN Section:** Includes a 10kΩ resistor (R1) connected to pin 18 (CHIP_EN) and a 10kΩ resistor (R2) connected to pin 11 (VDD33). Both resistors are connected to GND.
- VDD33 Section:** Includes a 100nF capacitor (C5) connected to pin 11 (VDD33) and a 10uF capacitor (C6) connected to pin 11 (VDD33). Both capacitors are connected to GND.
- USB Section:** Includes a 100nF capacitor (C7) connected to pin 12 (HUB_DM3) and a 100nF capacitor (C8) connected to pin 13 (HUB_DP3). Both capacitors are connected to GND.

Antennas:


- BT ANT:** A SMA connector connected to pin 2 (BT_RF).
- WL ANT:** A SMA connector connected to pin 3 (WL_RF).

Legend:


- BT_RF:** Bluetooth Radio Frequency
- WL_RF:** Wi-Fi Radio Frequency
- CHIP_EN:** Chip Enable
- VDD33:** 3.3V Power Supply
- USB_DM3:** USB Differential Mode 3
- USB_DP3:** USB Differential Mode 3

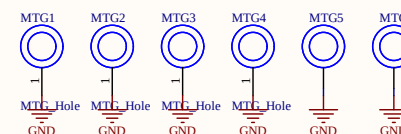




12V DCIN

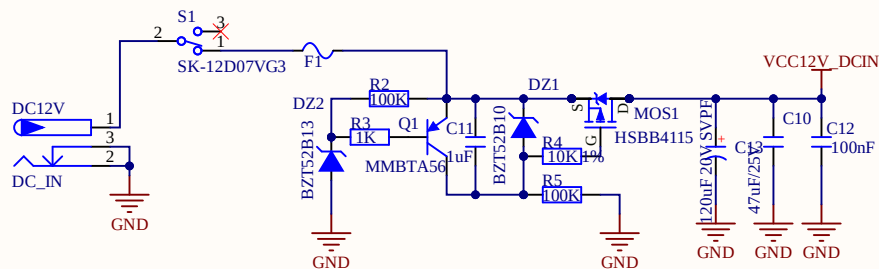


USB HUB

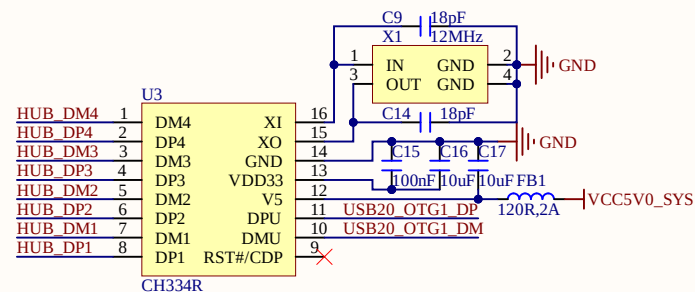


VCC5V0

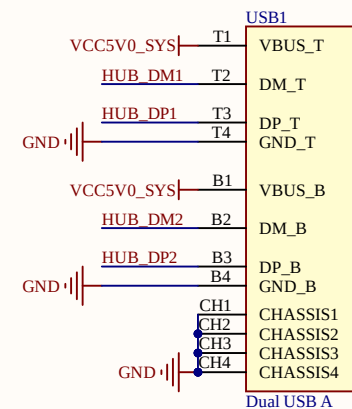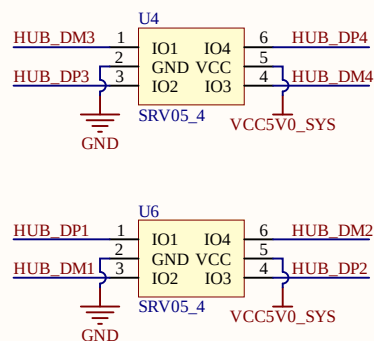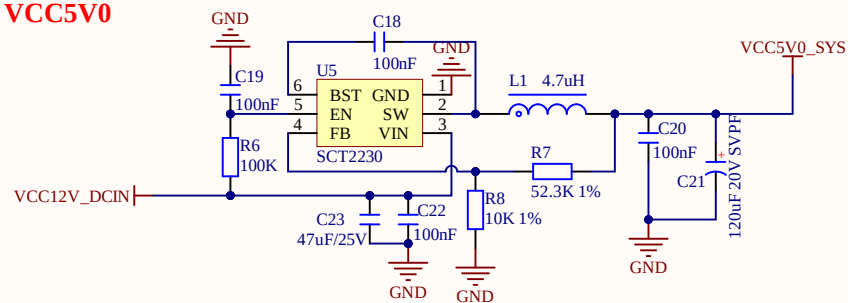


VCC_3V3

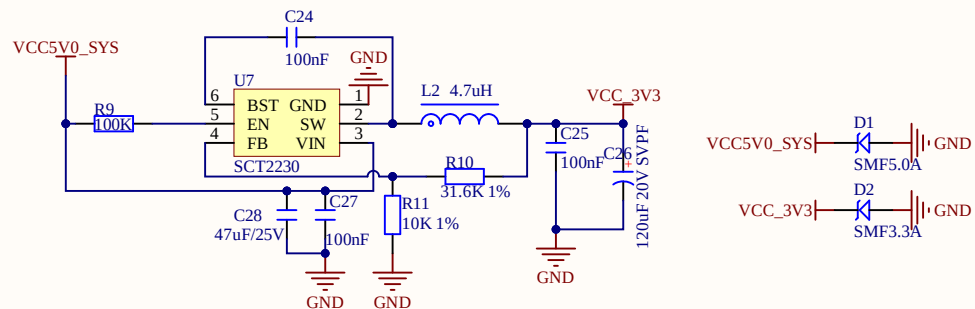


CODEC ES8388

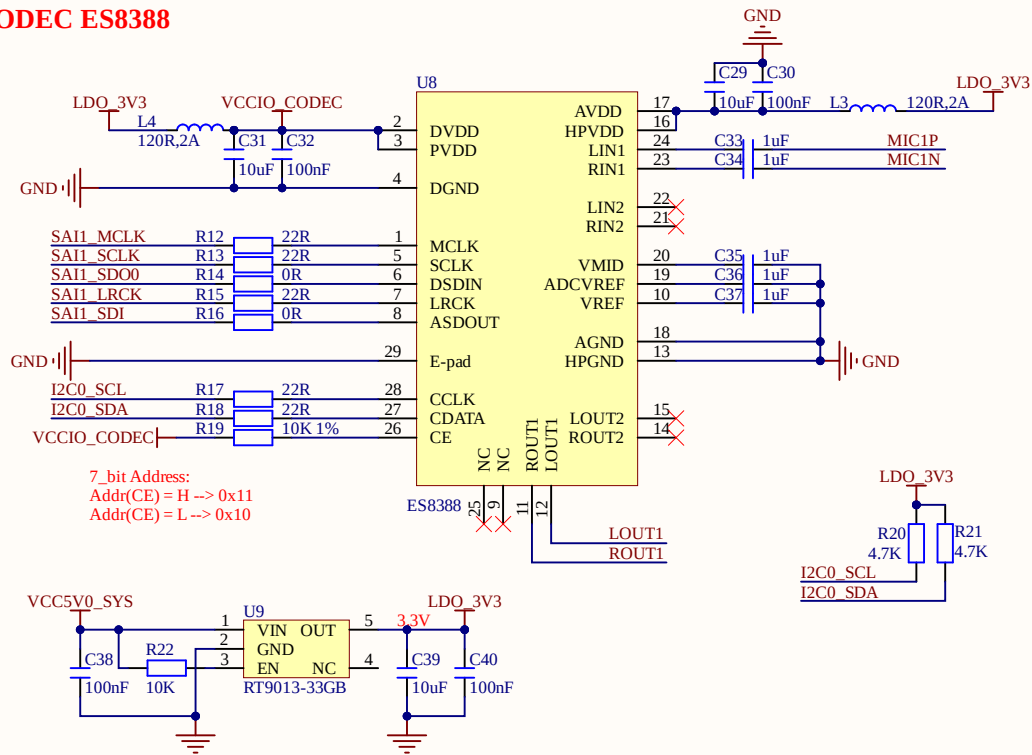


40PIN

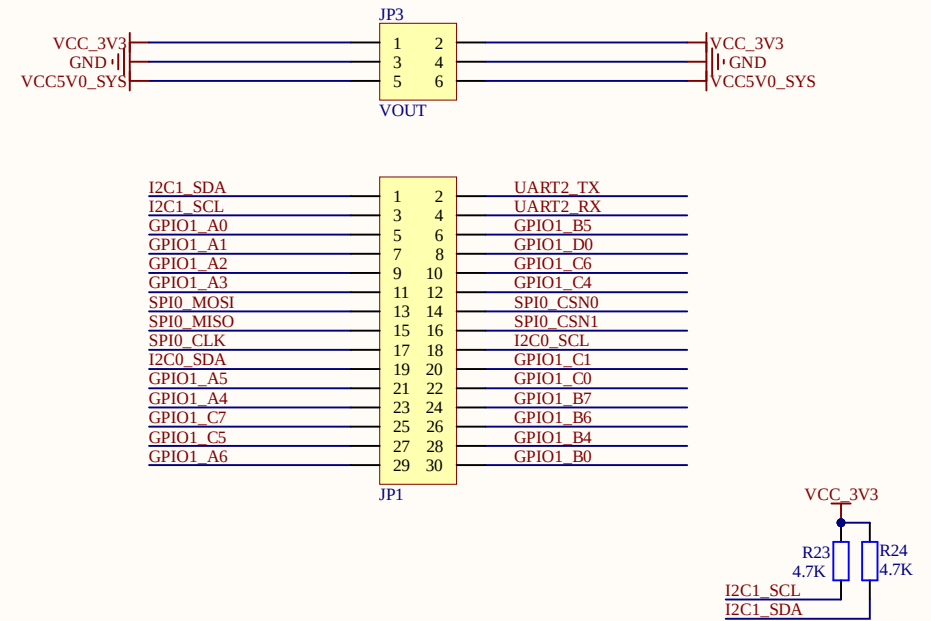


EARPHONE

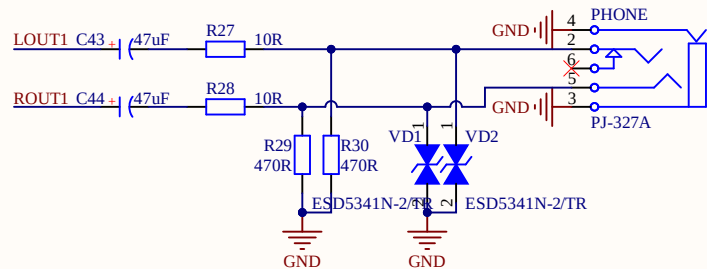



MIC

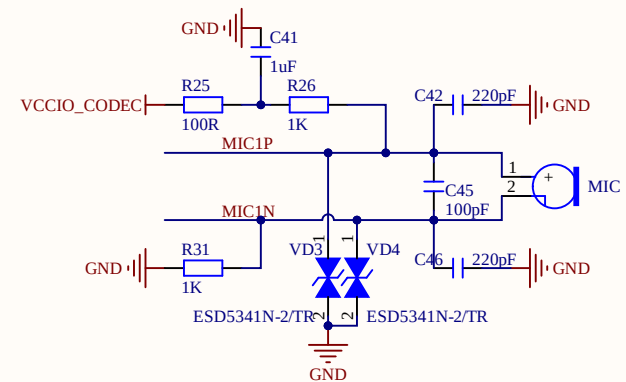

PHY

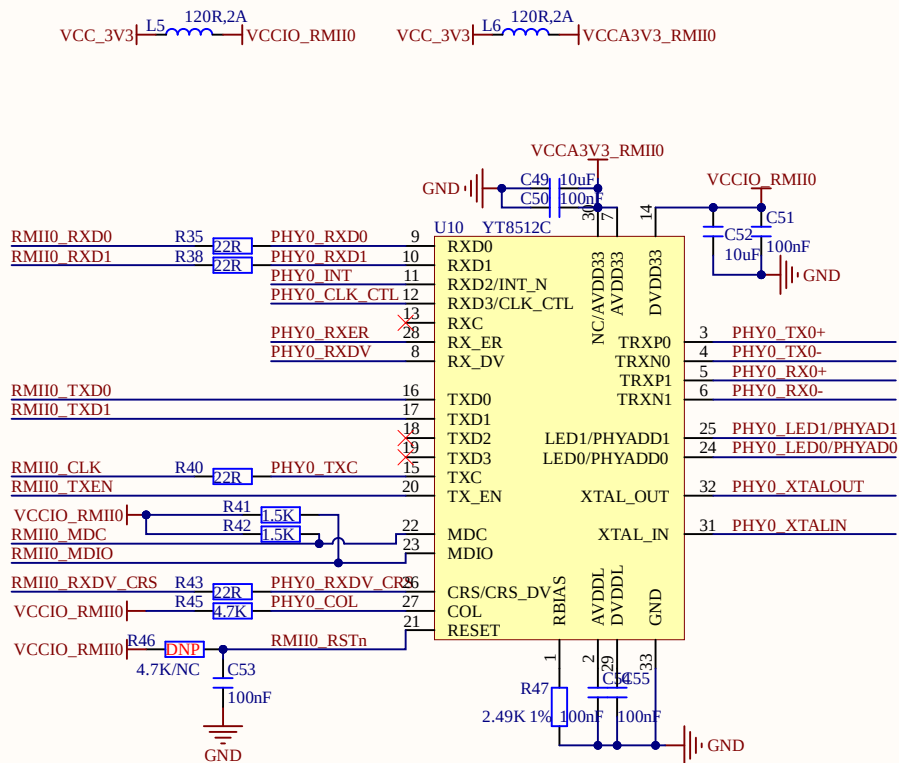

RJ45

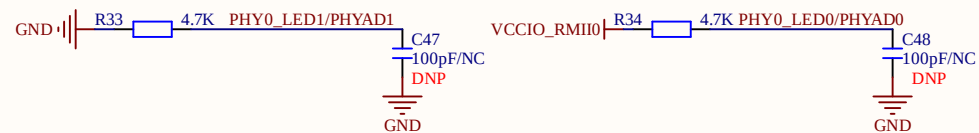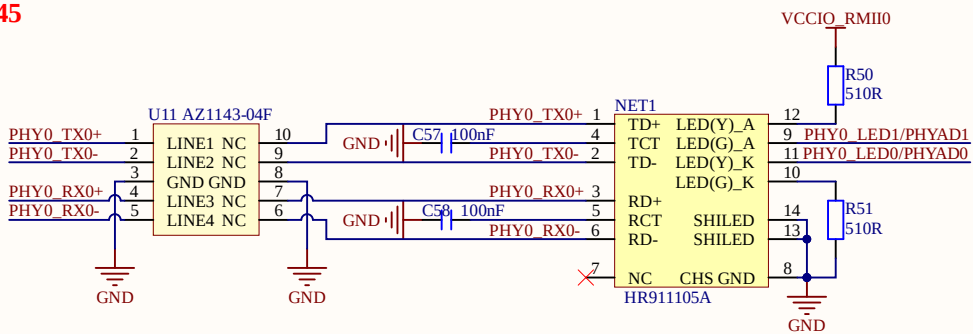


PHY Address Config

PHY Address	PHYAD[1:0]
1(default)	2'b01




RMII REF_CLK direction

(0 = RMII REF_CLK PHY Output mode; 1 = RMII REF_CLK PHY Input mode)




This pin is pulled high by an external 4.7Kohm.

This pin is used for the interrupt function only when in the RMII mode.




MII/RMII Selection (Pull High for RMII mode(default))



WOL/LED0 Selection (0 = LED0 Mode(default); 1 = WOL(Wake-on-LAN) Mode)


25M XTAL

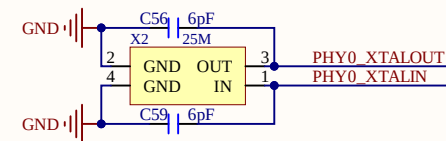



Title: 05_ATK_DLRK3506J_NET0.SchDoc		
Project: ATK-DLRK3506JS V1.0.PrjPcb		
Size: A4	Author: ALIENTEK	
Date: 2025/7/21	Version: V1.0	Sheet: 5 of 8



PHY

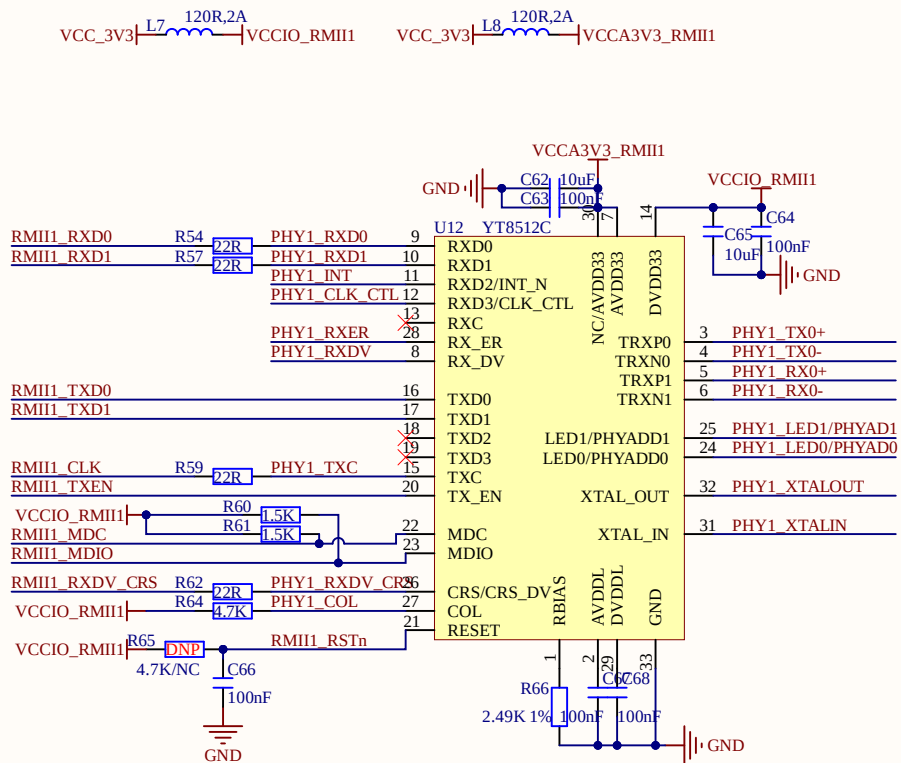

RJ45

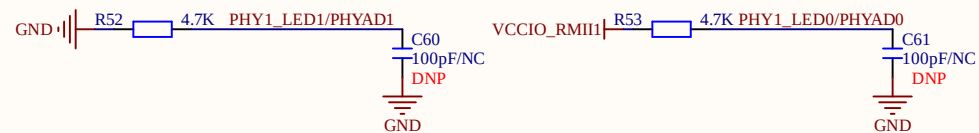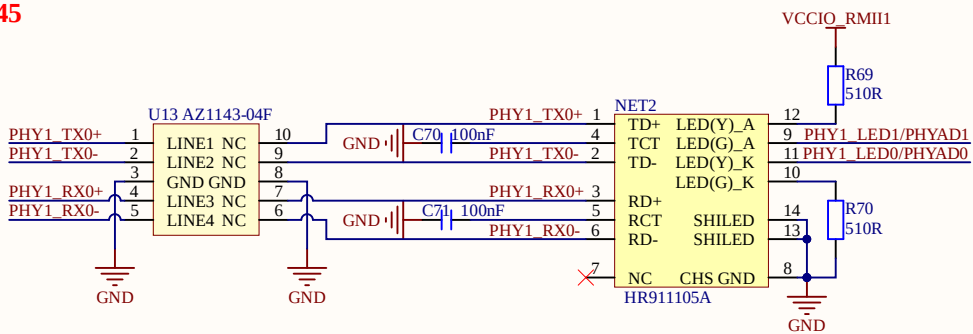


PHY Address Config

PHY Address	PHYAD[1:0]
1(default)	2'b01




RMII REF_CLK direction

(0 = RMII REF_CLK PHY Output mode; 1 = RMII REF_CLK PHY Input mode)




This pin is pulled high by an external 4.7Kohm.

This pin is used for the interrupt function only when in the RMI mode.




MII/RMII Selection (Pull High for RMII mode(default))



WOL/LED0 Selection (0 = LED0 Mode(default); 1 = WOL(Wake-on-LAN) Mode)


25M XTAL

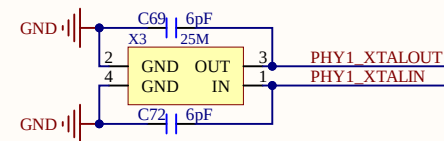


Title: 06_ATK_DLRK3506J_NET1.SchDoc		
Project: ATK-DLRK3506JS V1.0.PrjPcb		
Size: A4	Author: ALIENTEK	
Date: 2025/7/21	Version: V1.0	Sheet: 6 of 8




RESET




MASKROM




KEY




LED

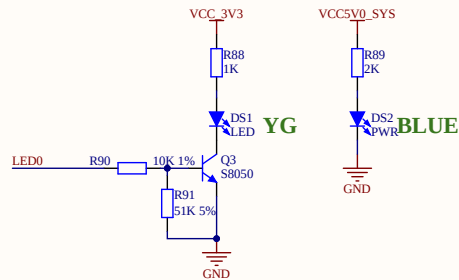


USB

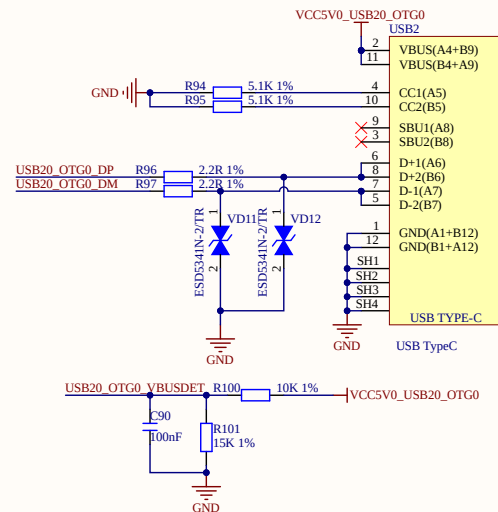

CAN0

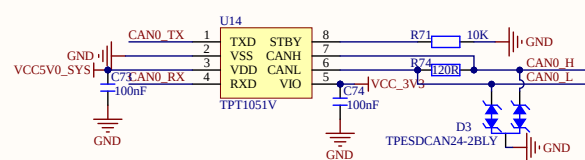


FDCAN&RS485 HEADER




换成4P的座子


MIPI DSI

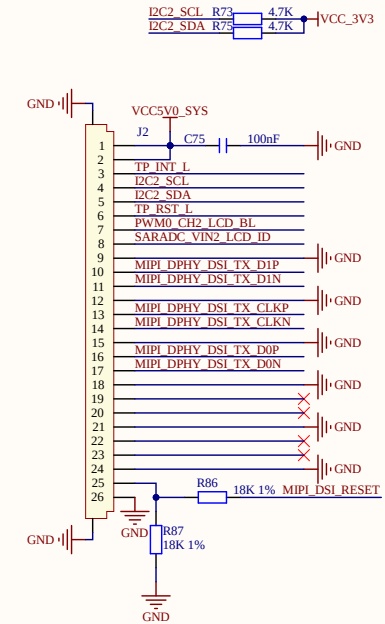


RS485

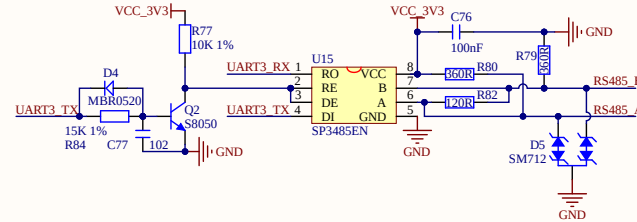




ADC

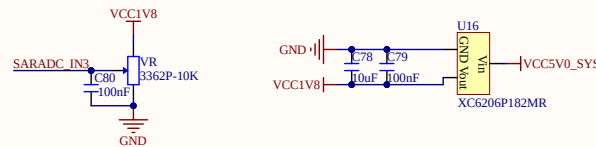

RTC

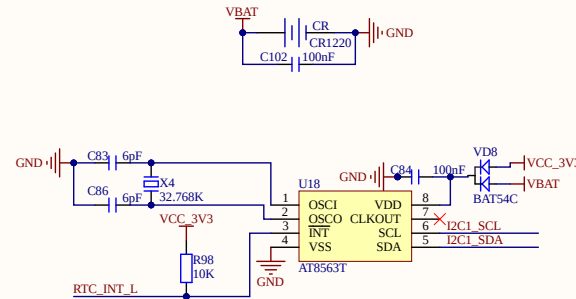

USART(TYPEC)

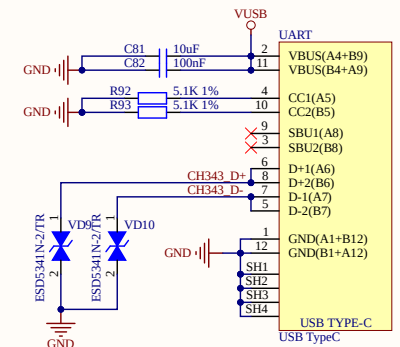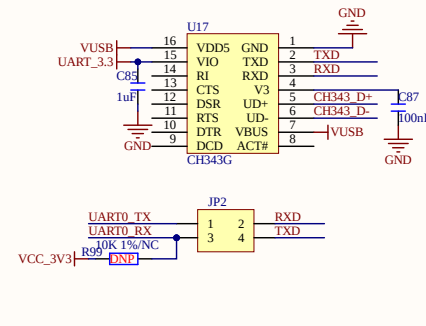

4G MODULE

