LUMI®
VERSE



The Art of

IGHTING

VLO-2

Energy Saver
Eco Friendly
Recycle
Long Lasting

THE ART OF LIGHTING



LUMI VERSE®

Vision

To be a leading force in redefining modern lighting solutions by delivering innovative, sustainable, and aesthetically exceptional commercial lighting products that inspire brilliance in every space we illuminate."

Mission

Our mission is to empower architects, designers, and businesses with high-quality, energy-efficient luxury lighting solutions that combine cutting-edge technology with elegant design. We are committed to excellence in service, reliability in supply, and fostering long-term partnerships through integrity, innovation, and customer-centric solutions."

LUMI VERSE®

CONTENT

Spot Lights 02

COB Lights 04

SMD Surface Lights 08

Rimless Surface Lights 13

LED Strip Lights 17

SMPS Drivers 21

Aluminium Profiles 24

SPOT LIGHT



A spotlight is a focused lighting fixture designed to highlight specific areas, objects, or architectural elements. Unlike general lighting, spotlights produce a narrow, concentrated beam that draws attention and adds depth to any space.


LUMI VERSE®

LVC-111

FOX

Specifications

Lumen Flux	80-90 LM
Input Voltage	AC 170-265V
Dimensions	Ø 38 × H 34mm
Cutout	Ø 32mm
Led Current	300MA ±
CRI	80
IP Rating	20
Price	**₹600.00**

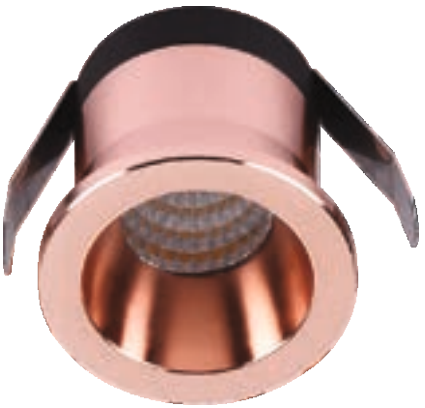

2W

24° Beam Angle

90 Lumens



LVC-112

EVA

Specifications

Lumen Flux	90-265 LM
Input Voltage	AC 9-265V
Dimensions	Ø 30 × H 18mm
Cutout	Ø 30mm
Led Current	300MA ±
CRI	80
IP Rating	20
Price	**₹400.00**



3W

90° Beam Angle

270 Lumens



Warranty
Two years

Body colour - Powder coated
White | Black | Rose Gold

3000K

Engineered Excellence

Powered by bridgelux

LUMI VERSE®

FIDO
SERIES



Optical Innovation
Suspended ens technology

COB SPOT LIGHT

LUMI VERSE®

LVC-113

FIDO

Specifications

Lumen Flux	1000-1100 LM
Input Voltage	AC 220-240V
Dimensions	Ø 69 × H 62mm
Cutout	Ø 55mm
Led Current	200MA ±
CRI	90
IP Rating	20
Price	₹1500.00
CCT	₹2600.00



10W
UGR < 10

36°
Beam Angle

1100
Lumens

Lumen Flux	1500-1650 LM
Input Voltage	AC 220-240V
Dimensions	Ø 83 × H 72mm
Cutout	Ø 75mm
Led Current	200MA ±
CRI	90
IP Rating	20
Price	₹1750.00
CCT	₹2850.00



15W
UGR < 10

36°
Beam Angle

1650
Lumens



Warranty
Two years

Body colour - Powder coated
White | Black | Rose Gold | Gun Black

3000K | 4000K

Engineered Excellence

TRIAC DIMMING
TRIAC DIMMING Compatible

DALI

IES
Available On Request

EAGLERISE

Powered by bridgelux

COB SPOT LIGHT

LUMI VERSE®

LVC-114

HELIX

Specifications

Lumen Flux	640-720 LM
Input Voltage	AC 220-240V
Dimensions	Ø 49 × H 74mm
Cutout	Ø 45mm
Led Current	200MA ±
CRI	90-95
IP Rating	20
Price	**₹1250.00**
CCT	**₹2350.00**



8W

36° Beam Angle

720 Lumens

Lumen Flux	1200-1500 LM
Input Voltage	AC 220-240V
Dimensions	Ø 59 × H 79mm
Cutout	Ø 55mm
Led Current	200MA ±
CRI	90-95
IP Rating	20
Price	**₹1650.00**
CCT	**₹2700.00**



15W

36° Beam Angle

1500 Lumens

Lumen Flux	1800-2000 LM
Input Voltage	AC 220-240V
Dimensions	Ø 70 × H 89mm
Cutout	Ø 65mm
Led Current	200MA ±
CRI	90-95
IP Rating	20
Price	**₹2600.00**
CCT	**₹3600.00**



22W

36° Beam Angle

2000 Lumens



Warranty
Two years

Body colour - Powder coated
White | Black | Rose Gold | Gun Black | Bronze

3000K | 4000K

Engineered Excellence

TRIAC DIMMING Compatible

DALI


IES Available On Request

EAGLERISE

Powered by OSRAM

COB SPOT
LIGHTS

COB Spot Lights combine elegance and performance in a compact design. The advanced COB LED module ensures consistent brightness and vivid color, enhancing the visual appeal of any environment. With options for various beam angles and finishes, these lights are perfect for creating focused highlights or ambient moods in retail, hospitality, and home interiors.

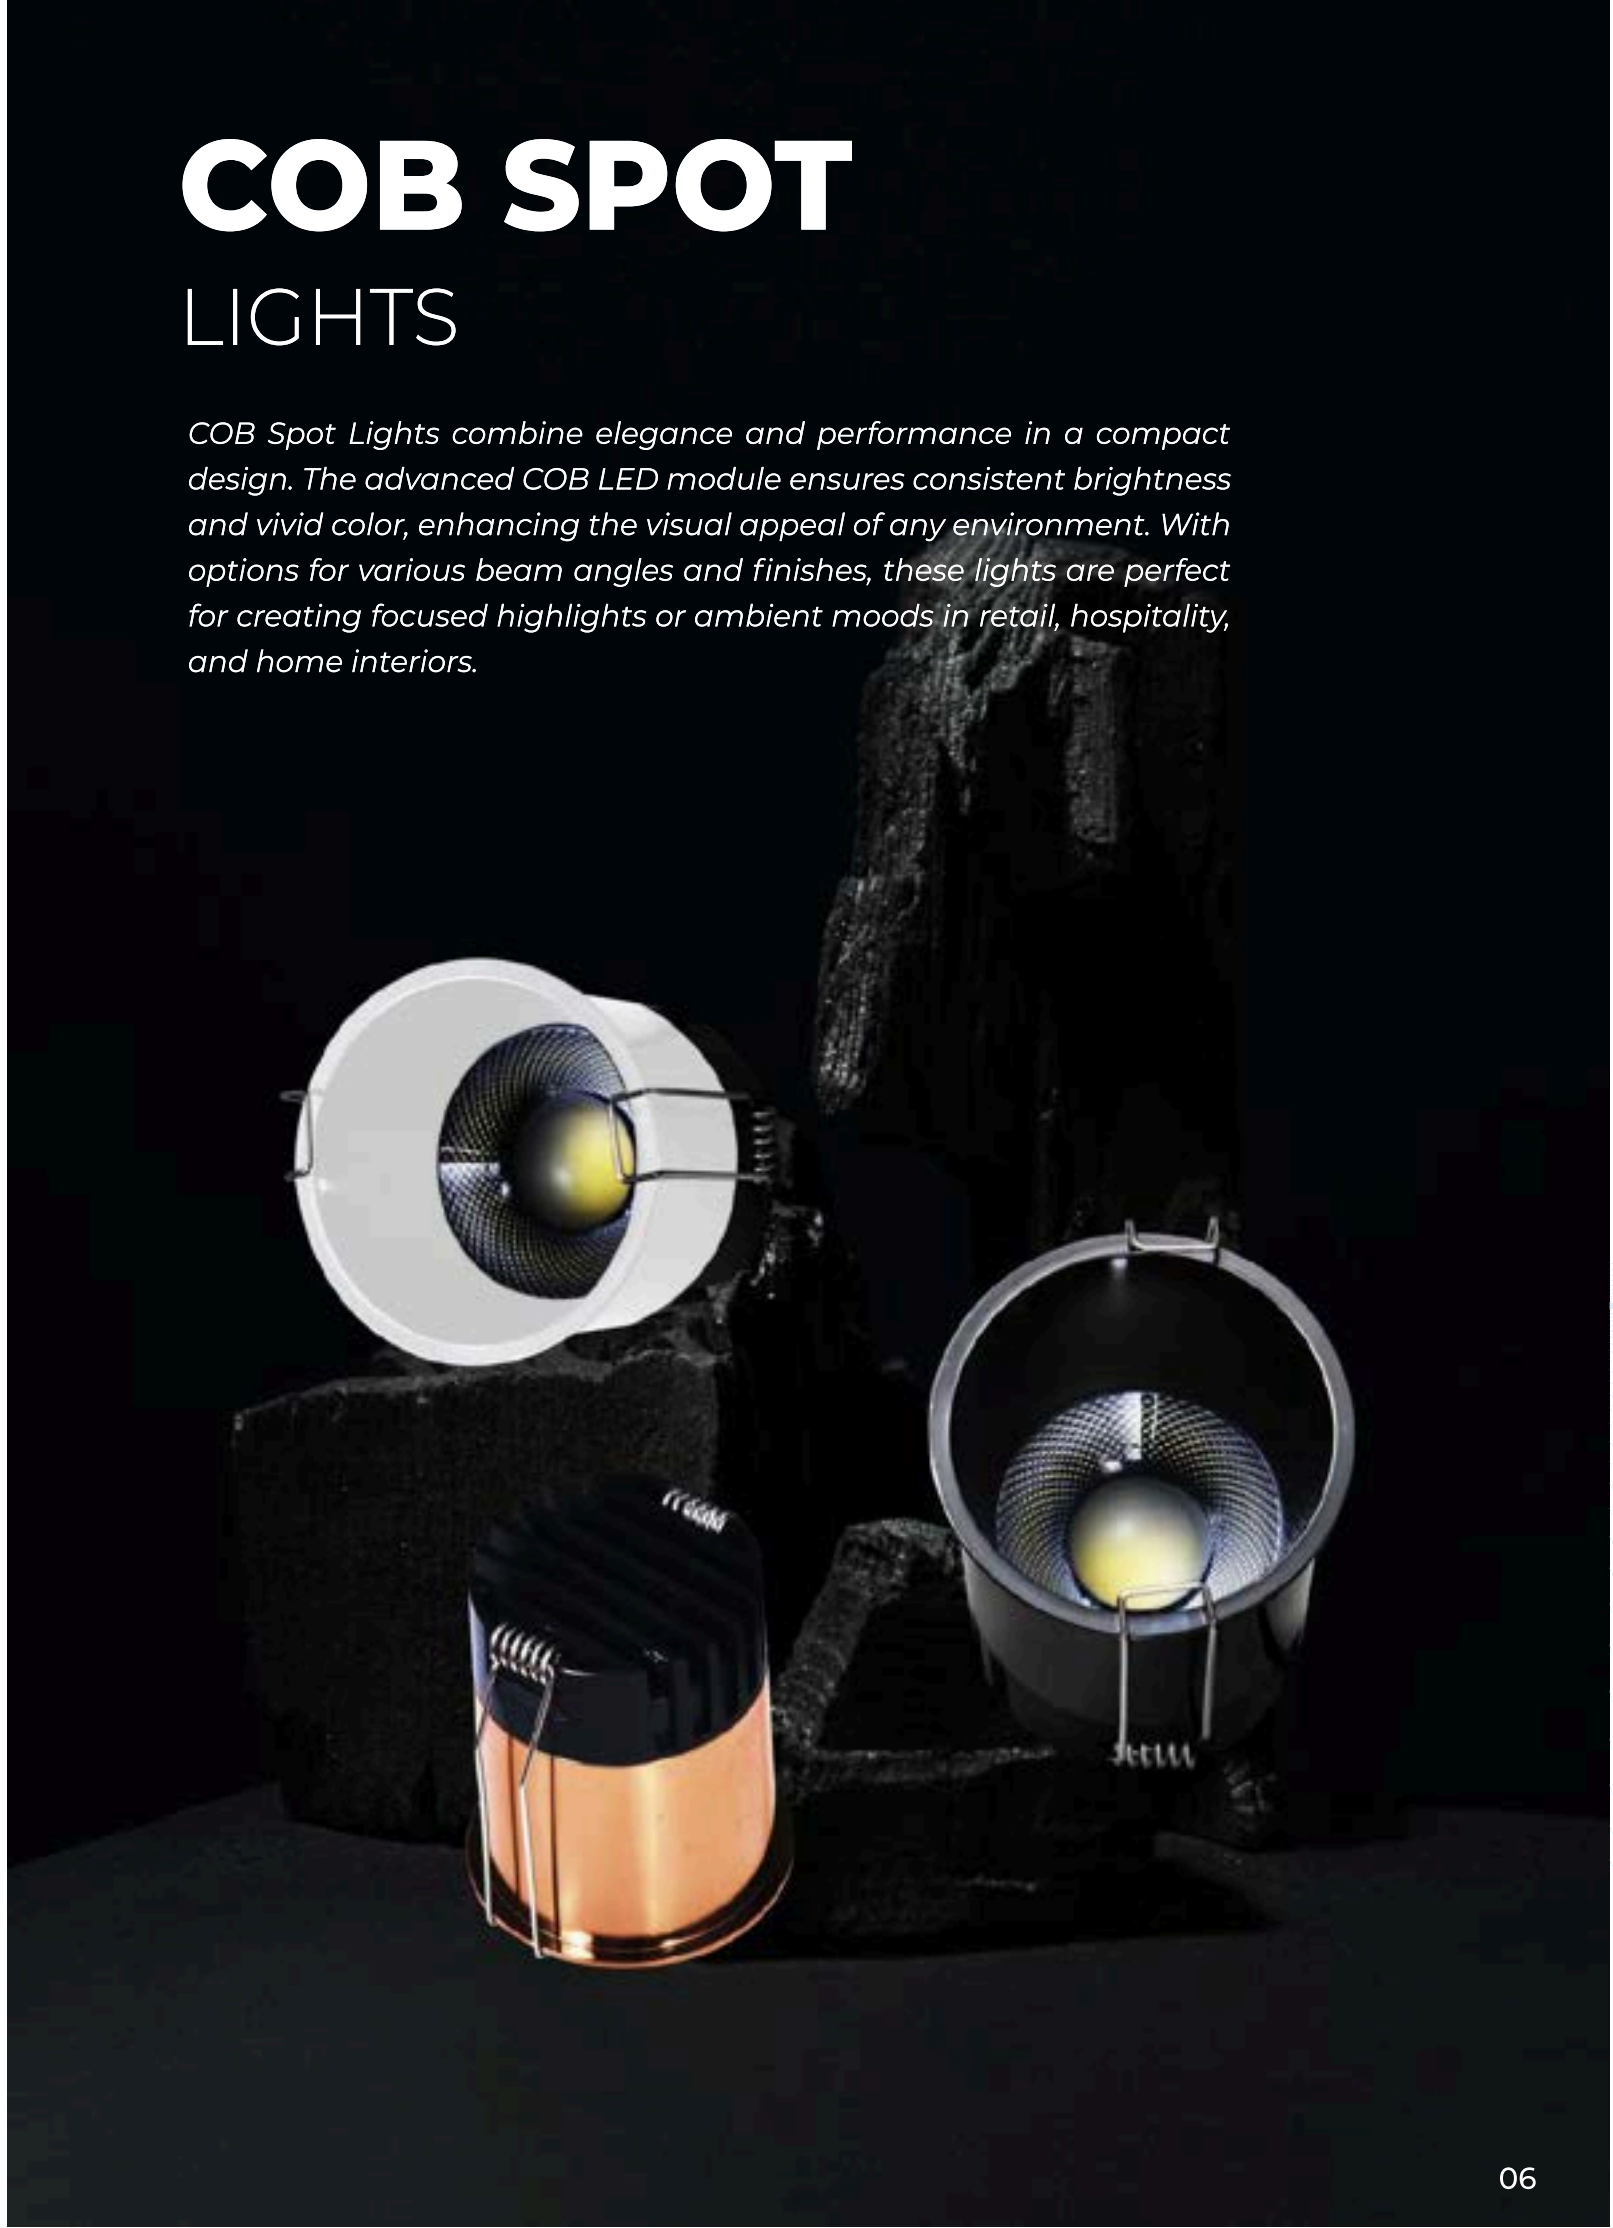

COB SPOT LIGHTS

LUMI VERSE®

LVC-115

VIDA

Specifications

Lumen Flux	640-720 LM
Input Voltage	AC 220-240V
Dimensions	Ø 62 × H 78mm
Cutout	Ø 55mm
Led Current	200MA ±
CRI	90
IP Rating	20
Price	₹1550.00
CCT	₹2650.00



7W
UGR < 10

36°
Beam Angle

720
Lumens

Lumen Flux	900-1000 LM
Input Voltage	AC 220-240V
Dimensions	Ø 72 × H 78mm
Cutout	Ø 65mm
Led Current	200MA ±
CRI	90
IP Rating	20
Price	₹1700.00
CCT	₹2850.00




10W
UGR < 10

36°
Beam Angle

1000
Lumens

Lumen Flux	1350-1500 LM
Input Voltage	AC 220-240V
Dimensions	Ø 82 × H 80mm
Cutout	Ø 75mm
Led Current	200MA ±
CRI	90
IP Rating	20
Price	₹2000.00
CCT	₹3150.00

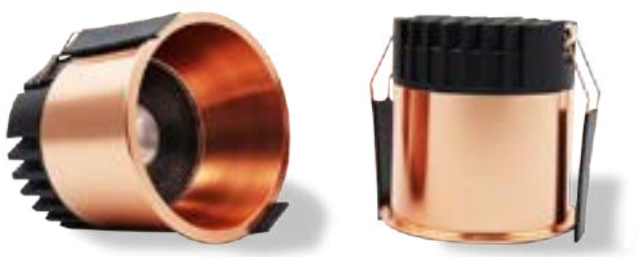

15W
UGR < 10

36°
Beam Angle

1500
Lumens



Warranty
Two years

Body colour - Powder coated
White | Black | Rose Gold | Gun Black

3000K | 4000K

Engineered Excellence

TRIAC DIMMING
TRIAC DIMMING Compatible

DALI

IES
Available On Request

EAGLERISE

Powered by bridgelux

LUMI VERSE®

LVD-211

AXE

Specifications

Lumen Flux	1000-1100 LM
Input Voltage	AC 220-240V
Dimensions	Ø 85 × H 32mm
Cutout	Ø 75mm
Led Current	300MA ±
CRI	80
IP Rating	20
Price	**₹660.00**



10W

120° Beam Angle

1100 Lumens

Lumen Flux	1500-1650 LM
Input Voltage	AC 220-240V
Dimensions	Ø 115 × H 32mm
Cutout	Ø 105mm
Led Current	300MA ±
CRI	80
IP Rating	20
Price	**₹860.00**



15W

120° Beam Angle

1650 Lumens

Lumen Flux	1800-2000 LM
Input Voltage	AC 220-240V
Dimensions	Ø 150 × H 32mm
Cutout	Ø 140mm
Led Current	300MA ±
CRI	80
IP Rating	20
Price	**₹1100.00**



20W

120° Beam Angle

2000 Lumens

Warranty
Two years

Body colour - Powder coated
White

3000K | 4000K | 6000K

Engineered Excellence

Powered by EPISTAR

SMD DOWN LIGHTS

LUMI VERSE®

Specifications

Lumen Flux	2500-2750 LM
Input Voltage	AC 220-240V
Dimensions	Ø 165 × H 32mm
Cutout	Ø 155mm
Led Current	300MA ±
CRI	80
IP Rating	20
Price	**₹1450.00**



AXE

25W

120°
Beam Angle

2750
Lumens



DOWN LIGHT

- *leek and compact design for modern ceiling aesthetics*
- *High-efficiency LED technology ensuring energy savings and long lifespan*
- *Uniform light distribution with low glare and excellent color rendering*
- *Die-cast aluminum housing for superior heat dissipation and durability*
- *Recessed mounting for a clean, flush finish*
- *Driver included, compatible with standard dimming options (optional)*
- *Ideal for offices, homes, retail spaces, hotels, and galleries*



LUMI VERSE®

LVD-212

PLUTO

Specifications

Lumen Flux	800-880 LM
Input Voltage	AC 90-250V
Dimensions	Ø 80 × H 44mm
Cutout	Ø 70mm
Led Current	280MA ±
CRI	80
IP Rating	20
Price	**₹1180.00**



8W

120° Beam Angle

880 Lumens

Lumen Flux	1500-1650 LM
Input Voltage	AC 90-250V
Dimensions	Ø 100 × H 63mm
Cutout	Ø 90mm
Led Current	300MA ±
CRI	80
IP Rating	20
Price	**₹1620.00**



15W

120° Beam Angle

1650 Lumens

Lumen Flux	2000-2200 LM
Input Voltage	AC 90-250V
Dimensions	Ø 126 × H 55mm
Cutout	Ø 115mm
Led Current	310MA ±
CRI	80
IP Rating	20
Price	**₹2150.00**



20W

120° Beam Angle

2200 Lumens



Warranty
Two years

Body colour - Powder coated
White | Black

3000K | 4000K | 6000K

Engineered Excellence

TRIAC DIMMING Compatible

DALI


IES Available On Request

EAGLERISE

Powered by OSRAM

RIMLESS SURFACE LIGHTS

- *Perfect for modern interiors*
- *Uniform, flicker-free illumination*
- *Energy-efficient LED light source*
- *Easy surface-mount installation*
- *Durable aluminum housing for long life*

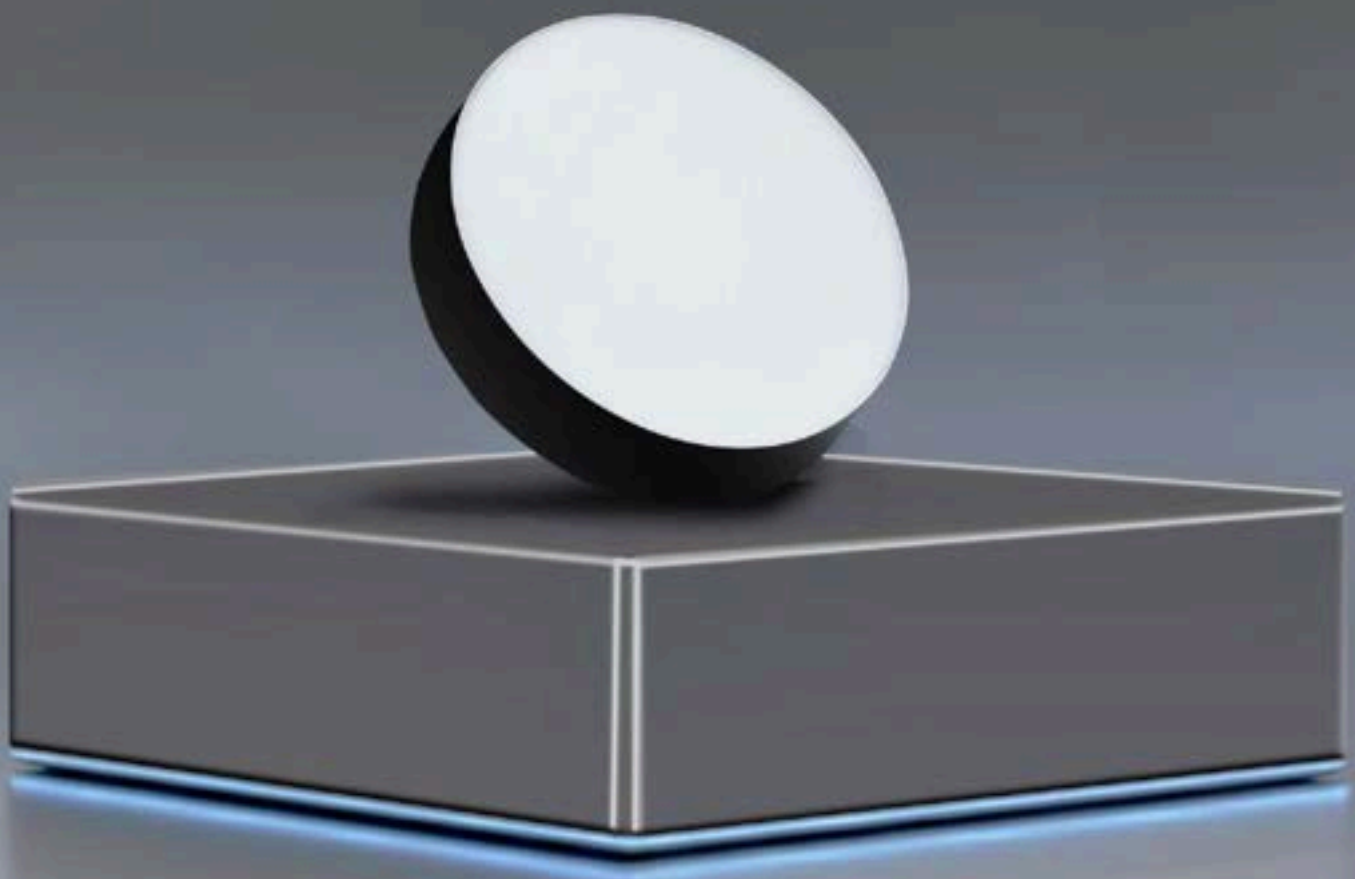

RIMLESS SURFACE LIGHTS

LUMI VERSE®

LVS-311

Specifications

Lumen Flux	490-560 LM
Input Voltage	AC 90-240V
Dimensions	Ø 96 × H 32mm
Surface	
Led Current	190MA ±
CRI	80
IP Rating	20
Price	**₹750.00**



DAWN

8W

120° Beam Angle

560 Lumens

Lumen Flux	1050-1200 LM
Input Voltage	AC 90-250V
Dimensions	Ø 155 × H 35mm
Surface	
Led Current	200MA ±
CRI	80
IP Rating	20
Price	**₹1290.00**



15W

120° Beam Angle

1200 Lumens

Lumen Flux	1400-1600 LM
Input Voltage	AC 90-250V
Dimensions	Ø 180 × H 35mm
Surface	
Led Current	200MA ±
CRI	80
IP Rating	20
Price	**₹1650.00**



20W

120° Beam Angle

1600 Lumens



Warranty
Two years

Body colour - Powder coated
White | Black

3000K | 4000K | 6000K

Engineered Excellence

Powered by EPISTAR

DOWN LIGHT

EAGLE

The EAGLE series is highly versatile with its compact and elegant appearance. It is suitable for both general and accent lighting applications. The refined design and wide range of optical angles allow designers to create a distinctive atmosphere and visual experience. EAGLE is ideal for various spaces, meeting diverse aesthetic requirements.

LUMI VERSE®

LVC-811

EAGLE

Specifications

Lumen Flux	630-700 LM
Input Voltage	AC 90-250V
Dimensions	Ø 60 × H 61mm
Led Current	190MA ±
CRI	80
IP Rating	54
Price	**₹1350.00**



7W

36° Beam Angle

700 Lumens

Lumen Flux	1080-1200 LM
Input Voltage	AC 90-250V
Dimensions	Ø 75 × H 75mm
Led Current	200MA ±
CRI	80
IP Rating	54
Price	**₹1700.00**



12W

36° Beam Angle

1200 Lumens



Warranty
Two years

Body colour - Powder coated
Black-Gold | Black-Black

3000K

Engineered Excellence

Powered by bridgelux

STRIP LIGHT

Strip Lights are flexible linear lighting solutions designed to deliver uniform and efficient illumination. They are ideal for both decorative and functional applications, offering versatility in creating ambient, accent, or task lighting. With options in color temperature, brightness, and waterproof ratings, strip lights adapt seamlessly to residential, commercial, and architectural spaces.



LUMI VERSE®



LVST-511

KELLY

Specifications - 120 LED, 12V (8mm)

Efficiency	22-24 LM
Input Voltage	12V DC
LED	120
IP Rating	20
Price/MTR	₹130.00



12W/M

180° Beam Angle

5 MTR ROLL

Specifications - 180 LED, 12V (5mm)

Efficiency	22-24 LM
Input Voltage	12V DC
LED	180
IP Rating	20
Price/MTR	₹250.00



18W/M

180° Beam Angle

5 MTR ROLL

Specifications - 240 LED, 12V (10mm)

Efficiency	22-24 LM
Input Voltage	12V DC
LED	240
IP Rating	20
Price/MTR	₹320.00



20W/M

180° Beam Angle

5 MTR ROLL

Warranty
Two years

3000K | 4000K

STRIPLIGHT

LUMI VERSE®




LVST-512

KELLY

Specifications - 120 LED, 24V (8mm)

Efficiency	22-24 LM
Input Voltage	24V DC
LED	120
IP Rating	20
Price/MTR	**₹160.00**



12W/M

180° Beam Angle

5 MTR ROLL

Specifications - 240 LED, 24V (10mm)

Efficiency	22-24 LM
Input Voltage	24V DC
LED	240
IP Rating	20
Price/MTR	**₹340.00**



20W/M

180° Beam Angle

5 MTR ROLL

Warranty
Two years

3000K | 4000K

STRIPLIGHT

480 12V LED COB STRIP

LUMI VERSE®

LVST-514

KELLY

Specifications - 480LED / 24V (8mm)

Efficiency	22-24 LM
Input Voltage	24V DC
LED	480
IP Rating	20
Price/MTR	**₹290.00**



13W/M

180° Beam Angle

5 MTR ROLL

COB Strips




Warranty
Two years

3000K

JORDAN

TANGO

Driver

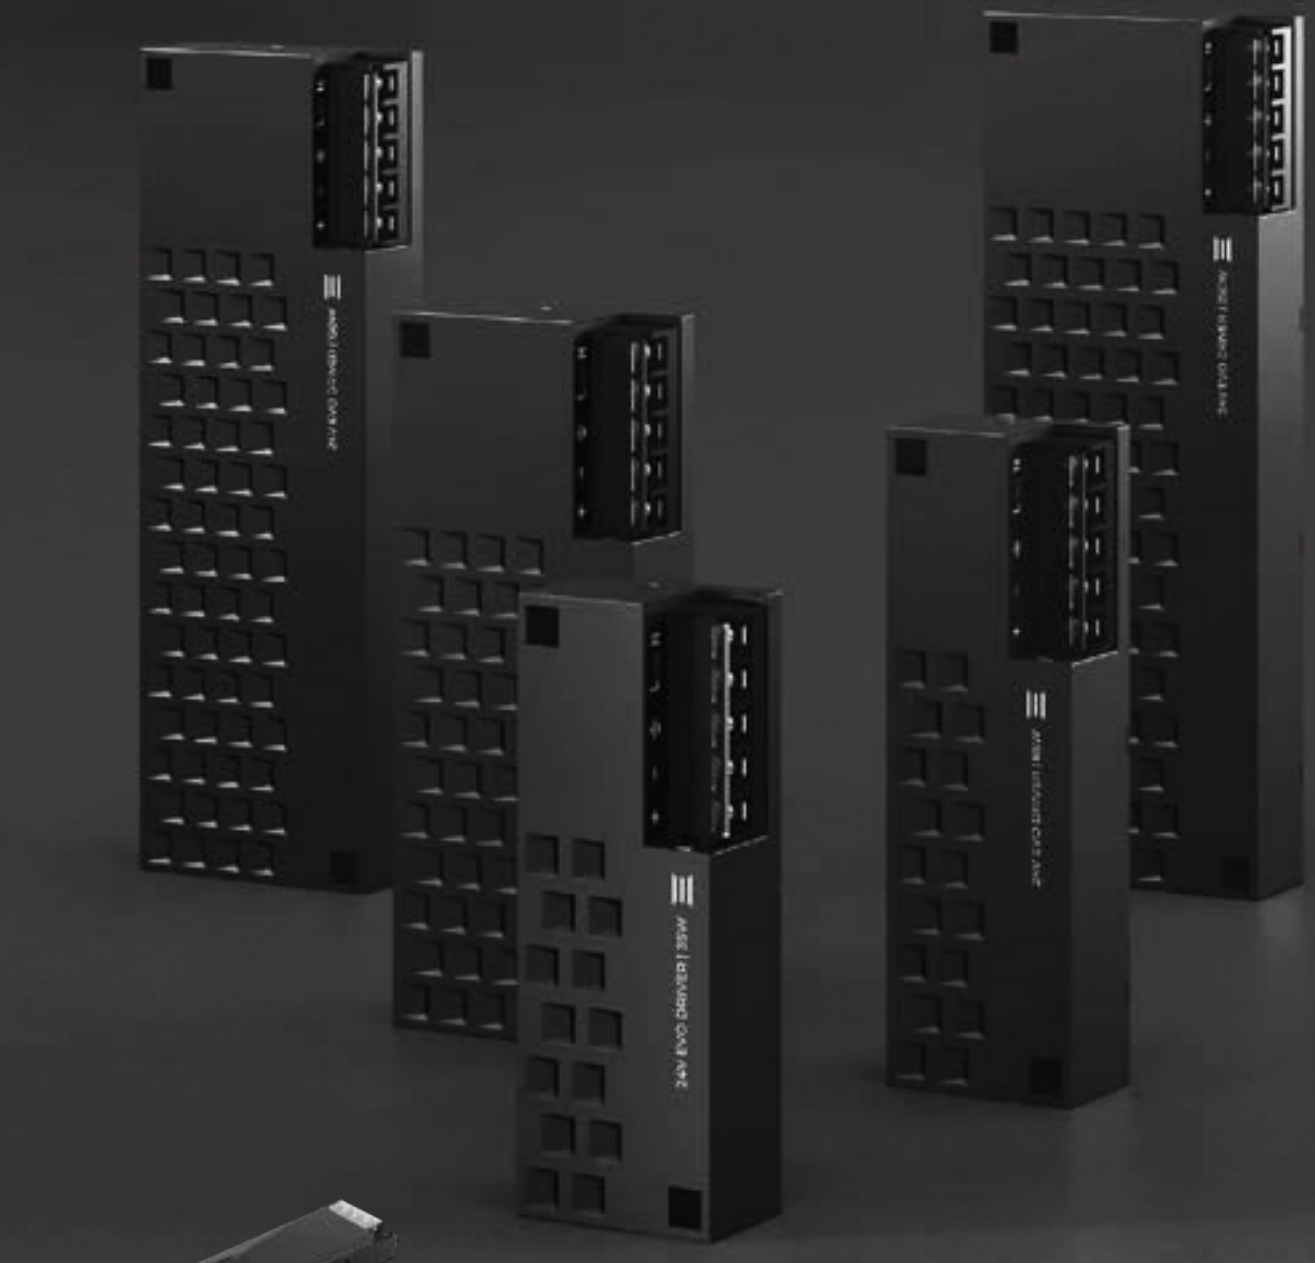



Presents several high power factor drivers with features that go beyond a new design, offering easier installation and maximum efficiency.

LUMI VERSE®

LVDR-611-12V

TANGO

Specifications

Input Voltage	175-265V
Output Voltage	+12V=5A DC
IP Rating	20
Price	₹600.00



60W
5 AMP
Glue Filling

Input Voltage	175-265V
Output Voltage	+12V=10A DC
IP Rating	20
Price	₹800.00



120W
10 AMP
Glue Filling

Input Voltage	175-265V
Output Voltage	+12V=16.5A DC
IP Rating	20
Price	₹1200.00



200W
16.5 AMP
Glue Filling

Input Voltage	175-265V
Output Voltage	+12V=25A DC
IP Rating	20
Price	₹1800.00



300W
25 AMP
Glue Filling

Warranty
Two years

LUMI VERSE®

LVDR-611-24V

JORDAN

Specifications

Input Voltage	180-275V
Output Voltage	+24V=2.5A DC
IP Rating	20
Price	₹700.00



60W
2.5 AMP
Glue Filling

Input Voltage	180-275V
Output Voltage	+24V=5A DC
IP Rating	20
Price	₹900.00



120W
5 AMP
Glue Filling

Input Voltage	180-275V
Output Voltage	+24V=8.3A DC
IP Rating	20
Price	₹1400.00



200W
8.3 AMP
Glue Filling

Input Voltage	180-275V
Output Voltage	+24V=12.5A DC
IP Rating	20
Price	₹1950.00



300W
12.5 AMP
Glue Filling

Warranty
Two years

ARCHI

LINEAR LIGHTING FOR
EXCEPTIONAL PROJECTS


LUMI VERSE®


LVP-S711

ARCHI


Specifications


5MM SF
2/MTR
Price/MTR ₹130.00

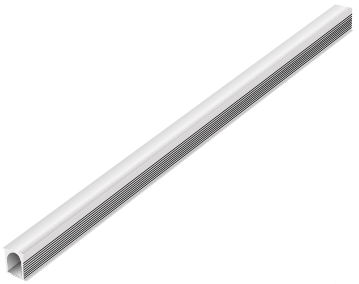





5MM CC
2/MTR
Price/MTR ₹130.00

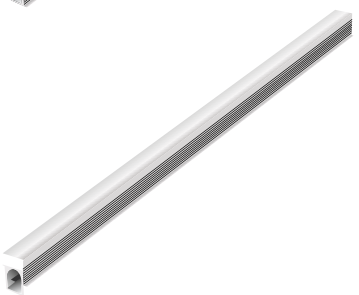





8MM SF
2/MTR
Price/MTR ₹140.00

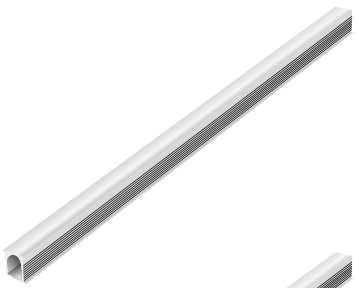





8MM CC
2/MTR
Price/MTR ₹140.00

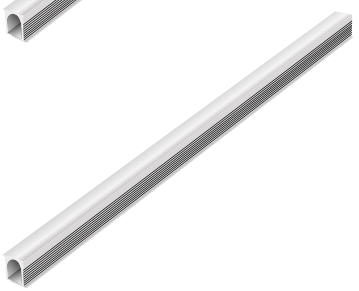





12MM SF
2/MTR
Price/MTR ₹130.00

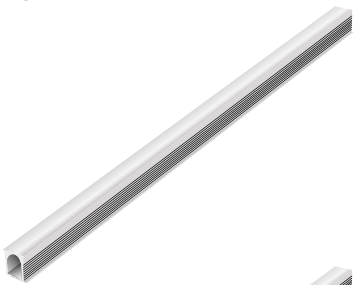



12MM CC
2/MTR
Price/MTR ₹130.00

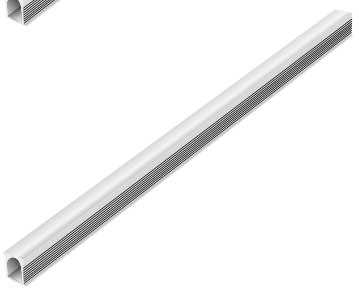



LUMI VERSE®

LVP-S711


ARCHI


Specifications

17MM SF

2 MTR

Price/MTR ₹140.00

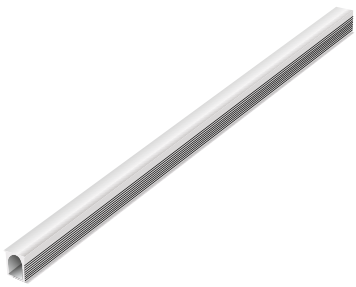





17MM CC

2 MTR

Price/MTR ₹140.00

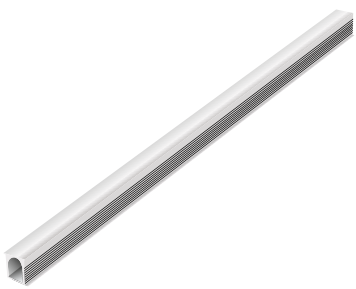





25MM SF

2 MTR

Price/MTR ₹200.00

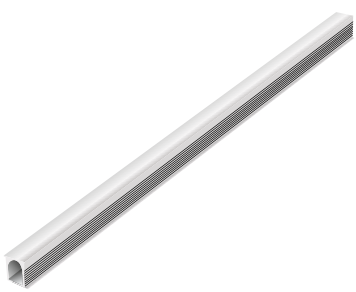





25MM CC

2 MTR

Price/MTR ₹200.00

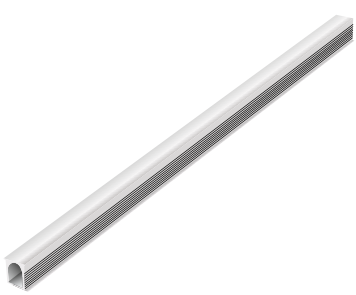



BODY COLOUR ANODIZED

Notes -

Version 001151025

website: www.lumiverselighting.com