


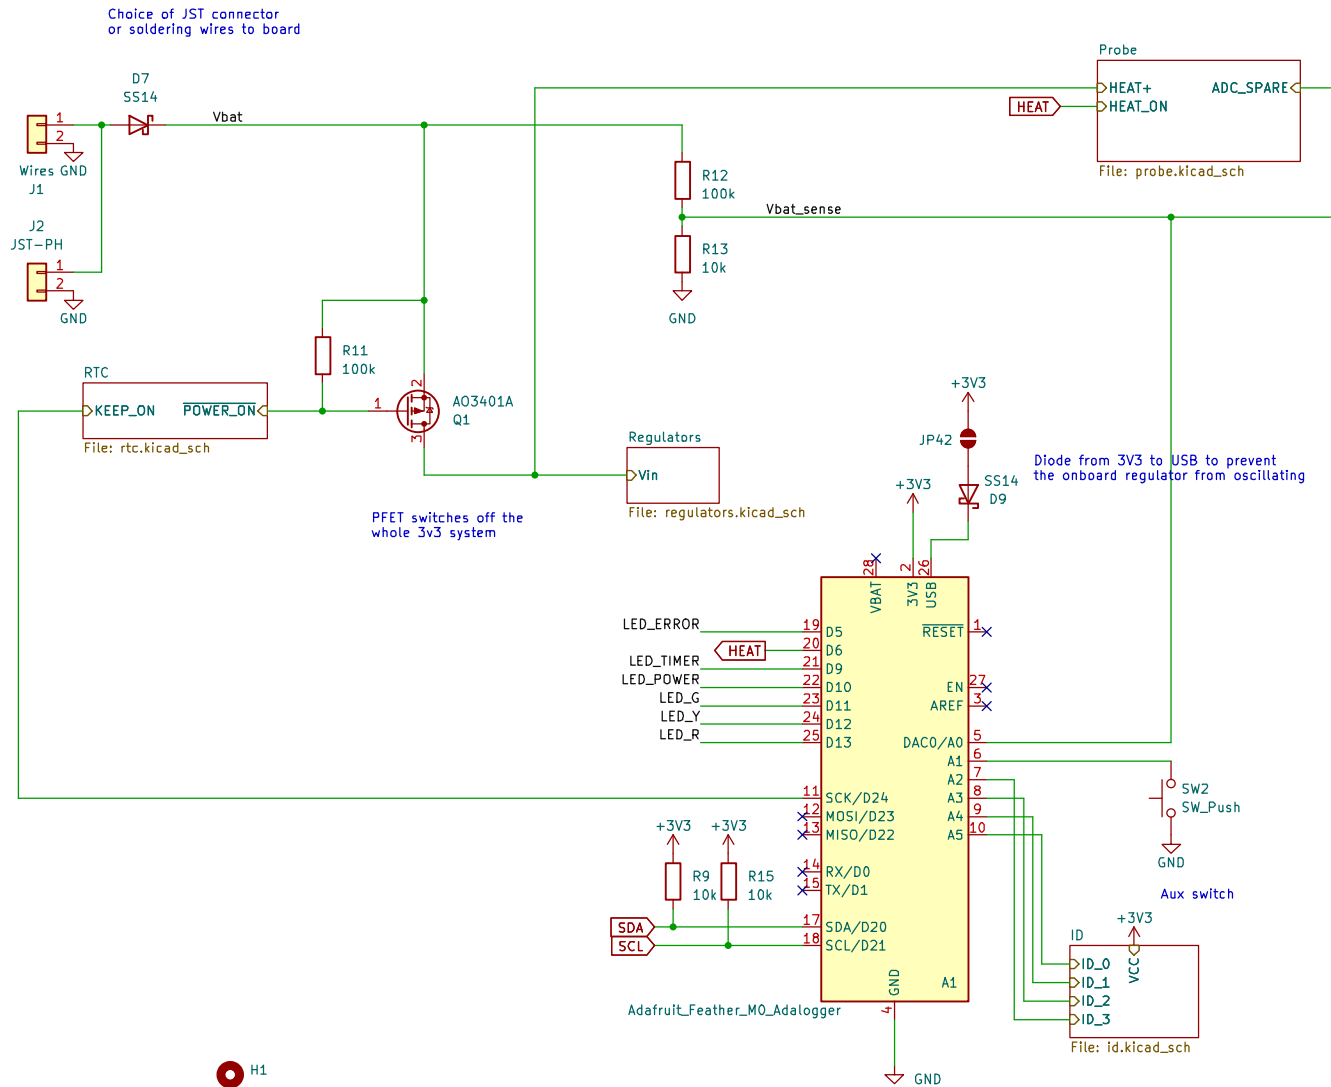





Traffic light LEDs
Red, Yellow, Green



Three more LEDs for timer, error, power.
The exact behavior will be determined later.



Mounting holes for the four
bosses inside the enclosure.
110mm apart in a cross shape

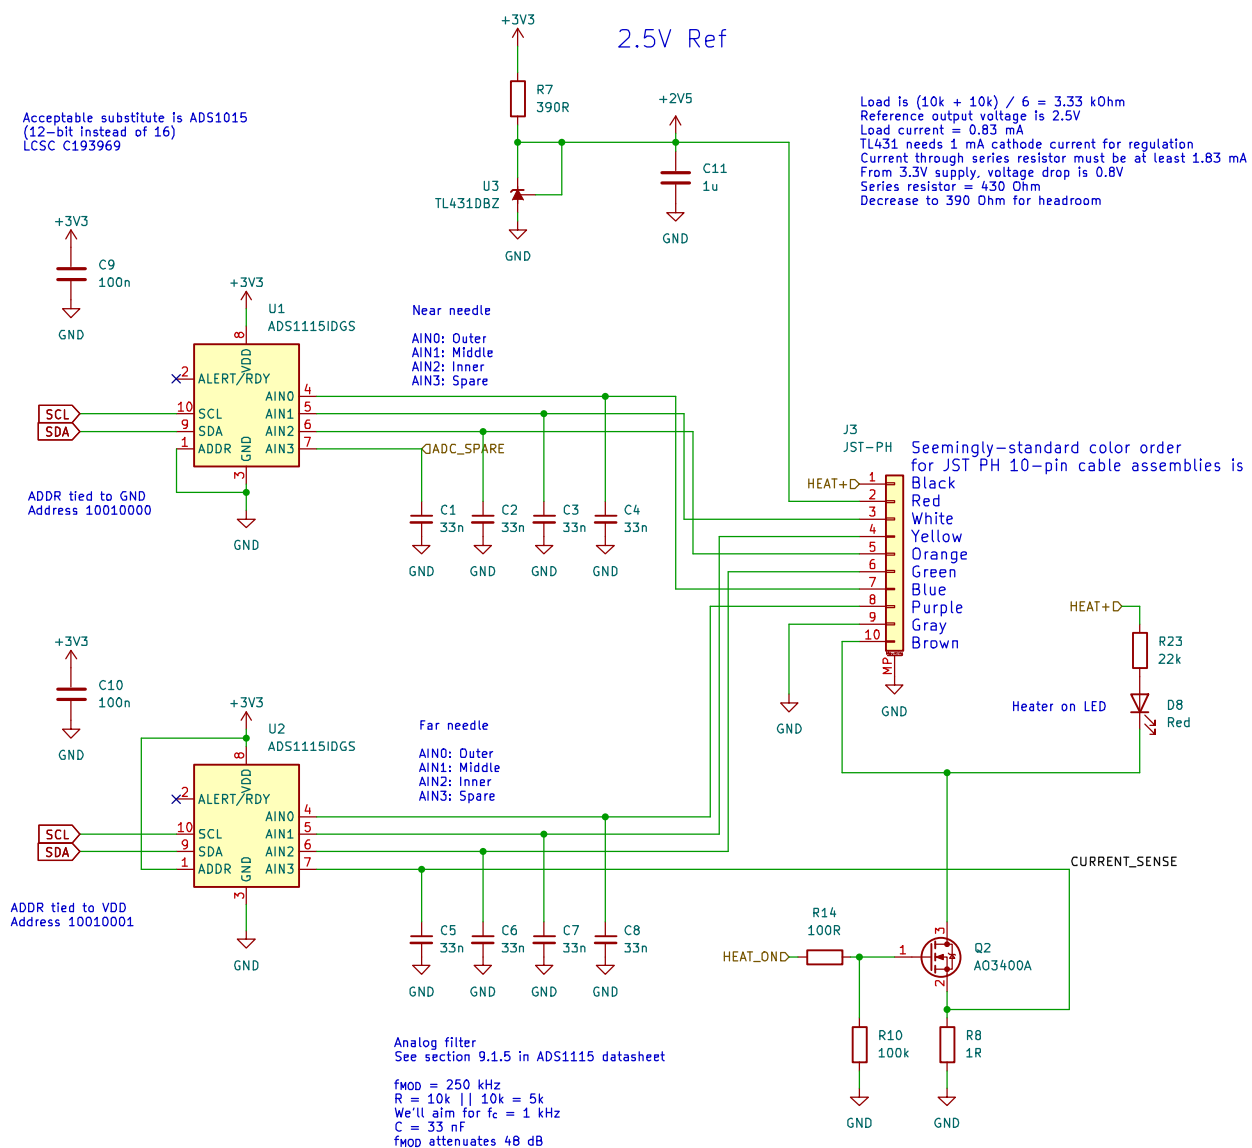


We will try to keep the same colors,
but substitutions are necessary


East 30 uses two black for the heater,
we'll use black and brown.

East 30 has pink, we'll use gray.

The rest is the same

I think this also makes the connector electrically reversible, as a hedge against getting pin 1 backwards.

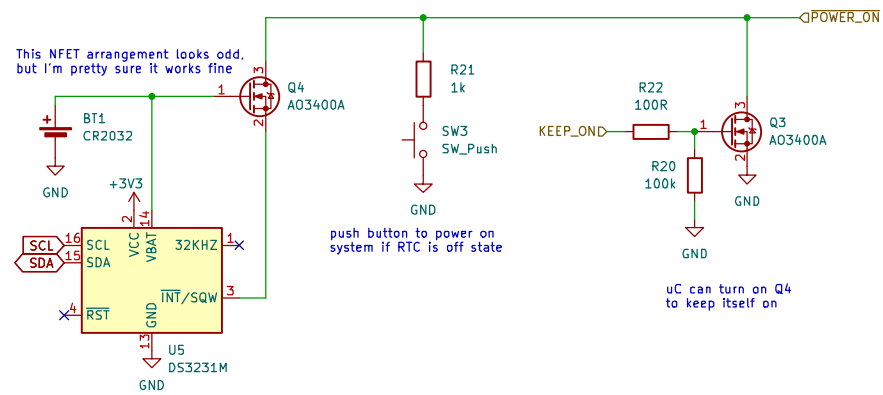

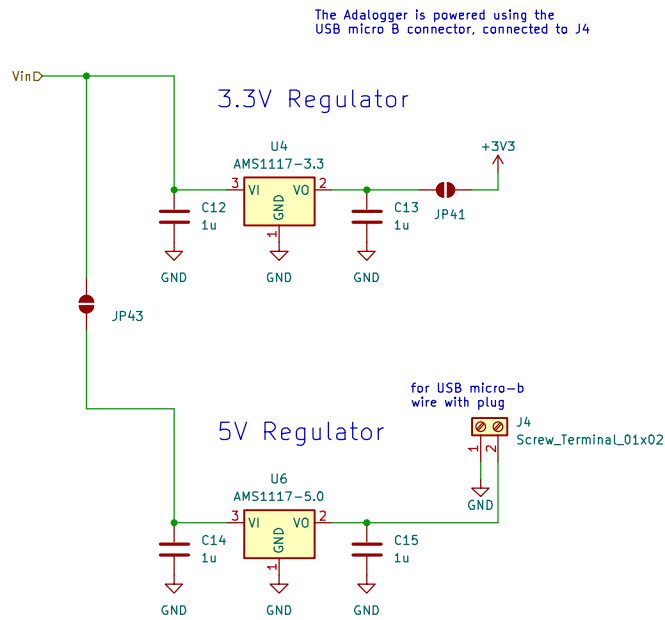

There are two supported ways to power the Adalogger.

The old way is to connect 5V to the USB port using a short "pig-tail" cable, connected to a push terminal.

The new way is to use a 3.3V regulator on the sensor board connected to the 3.3V pin on the Adalogger. This should be safe, but I'm including the old way just in case.

To use the new way, solder JP41 and JP42.

To use the old way, solder JP43, populate J4 and use the pig-tail.

