

ALGO PIPES
CONNECTING TECHNOLOGIES

The Real Pumping Experience



uPVC Column Pipes

ALGO PIPES
CONNECTING TECHNOLOGIES

Unbreakable



Specification

- Maximum ambient temperature 70°C
- Maximum installation depth 370m
- Installation: Vertical, Horizontal or Inclined

Applications

- Used as riser pipe for submersible and jet pump for Irrigation & Domestic purposes
- Industrial mining and Chemical distribution
- The best replacement for MS, PPR, ERW, GL, HDPE and Stainless Steel column pipes
- uPVC is nearly inert towards corrosion, chemical reaction and erosion, so that, it is ideally used in salty, sandy and chemically aggressive water

Special Features

- Surface finish of this pipe is extremely smooth which reduces the hydraulic friction losses & helps improve the flow
- Internal and external square threaded spigot ends and rubber gasket for easy and reliable jointing and pressure sealing
- Special square thread gives quick & easy installation facility and provides strength
- Provision of inside seal ring to prevent friction loss & over tightening
- Provision of step ring to stop leakage & over tightening

Salient Features

- Corrosion Free
- Easy Installation & Handling
- Very Low Friction Loss
- Termite Proof
- Non Toxic & Resistant to chemical reactions.
- Unbreakable & longer life span upto 25 years.
- The best alternative for G.I Pipes and cost effective.

Upto 6" (150 mm)

Other Advantages

- Corrosion-proof even if pipes are fitted with MS and CI top & bottom pipe adaptors.
- Inkjet / Laser printing & Hallmark to prevent duplication in market
- Provision of outer seal ring to prevent leakage & over tightening
- Very smooth internal surface increases 10 % to 20% water flow & reduces 10% to 20% power consumption
- Freezing Technology & Screw locking system ensure a trouble free pumping .

Wall Thickness of Column Pipes

Technical Data

Product Range

Nominal Diameter		Nominal O.D.	O.D. including coupler (Max)	Wall Thickness					
mm	inch			Primo ++	Nano	Medium	Standard	Heavy	Super Heavy
25	1.00"	33.30	46.10	3.30	3.50	3.50	4.80	-	-
32	1.25"	42.16	55.10	4.10	4.20	4.20	5.00	6.40	-
40	1.50"	48.26	62.50	-	4.30	4.30	5.20	6.00	-
50	2.00"	60.32	79.00	-	4.60	4.80	6.00	7.30	8.00
65	2.50"	75.15	91.80	-	5.30	5.30	6.60	8.70	10.00
80	3.00"	88.20	110.00	-	-	6.00	7.40	9.90	10.50
100	4.00"	113.30	136.50	-	-	6.50	8.50	12.0	12.50
125	5.00"	141.30	165.00	-	-	7.70	10.20	15.20	16.50
150	6.00"	165.00	205.00	-	-	-	-	16.50	-

All dimensions are in mm

Packing Details

(Nos. of Pipes/Bundle)

mm	3 Meter	5.8/6 Meter
1.00"	25	-
1.25"	25	-
1.50"	20	-
2.00"	10	-
2.50"	10	5
3.00"	5	3
4.00"	5	3
5.00"	3	2
6.00"	3	2

Color Coding of Pipes

Types	Identity Printing Color
Primo ++	Orange
Nano	Peacock Blue
Medium	Blue
Standard	Red
Heavy	Green
Super Heavy	Black

Pressure Ratings for Column Pipes (kg/cm²)

Size		Primo ++	Nano	Medium	Standard	Heavy		Super Heavy
mm	inch					Primo ++	Nano	
25	1.00"	12.50	15	21	27	-	-	-
32	1.25"	12.50	15	21	27	35	-	-
40	1.50"	-	15	21	27	35	-	-
50	2.00"	-	13	18	21	27	35	-
65	2.50"	-	13	15	18	27	35	-
80	3.00"	-	-	11	18	27	35	-
100	4.00"	-	-	10	16	27	35	-
125	5.00"	-	-	10	16	27	35	-
150	6.00"	-	-	-	-	27	-	-

Weight, Load & Pressure Carrying Capacity

Type & Size OD - Outer Dia. NB - Nominal Bore	Net Weight (kg.)	Ultimate Breaking Load (kg.)	Max Pulling Load with Chain Pulley or Crane (kg.)	Max Allowable Hydrostatic Pressure (kg.)	Max Total Shut Off Head of The Pump (mtr.)	Recommended Installation Depth of Pipes Max. (mtr.)	Recommended Installation Depth of Pipes Max. (ft.)	Weight of Pipes at Recommended Installation Depth (kg.) (A)	Weight of Water at Recommended Installation Depth (kg.) (B)	Weight of Pump & Motor at Recommended Installation Depth (kg.) (C)	Total Weight at Recommended Installation Depth (A+B+C)
OD : 33mm (1") NB : 25 mm											
Primo	0.97	850	500	12.50	125	88	287	28	43	25	96
Nano	1.08	1000	580	15.00	150	105	344	38	52	35	125
Medium	1.31	1500	800	21.00	210	147	482	64	72	42	178
Standard	1.63	2200	1250	27.00	270	189	620	103	93	45	241
OD : 42mm (1.25") NB : 32 mm											
Primo	1.48	1600	800	12.50	125	88	287	43	71	27	141
Nano	1.58	1720	900	15.00	150	105	344	55	84	38	177
Medium	1.94	1800	1150	21.00	210	147	482	95	118	40	253
Standard	2.14	2650	1400	27.00	270	189	620	135	152	60	347
Heavy	2.80	3100	1800	35.00	350	245	804	230	197	84	511
OD : 48mm (1.5") NB : 40 mm											
Nano	2.00	2000	1000	15.00	150	105	344	70	150	45	265
Medium	2.30	2300	1200	21.00	210	147	482	113	185	60	358
Standard	2.62	3200	1700	27.00	270	189	620	165	237	75	477
Heavy	3.47	4200	2200	35.00	350	245	804	285	308	86	679
OD : 60mm (2") NB : 50 mm											
Nano	2.35	2730	1750	13.00	130	91	298	71	179	58	308
Medium	2.70	3040	2000	18.00	180	126	413	113	247	80	440
Standard	3.90	5098	2700	21.00	210	147	482	191	288	110	589
Heavy	4.60	5682	3200	27.00	270	189	620	290	371	128	789
Super Heavy	5.48	6200	3600	35.00	350	245	804	449	481	145	1075

Weight, Load & Pressure Carring Capacity

Type & Size OD - Outer Dia. NB - Nominal Bore	Net Weight (kg.)	Ultimate Breaking Load (kg.)	Max Pulling Load with Chain Pulley or Crane (kg.)	Max Allowable Hydrostatic Pressure (kg.)	Max Total Shut Off Head of The Pump (mtr.)	Recommended Installation Depth of Pipes Max. (mtr.)	Recommended Installation Depth of Pipes Max. (ft.)	Weight of Pipes at Recommended Installation Depth (kg.) (A)	Weight of Water at Recommended Installation Depth (kg.) (B)	Weight of Pump & Motor at Recommended Installation Depth (kg.) (C)	Total Weight at Recommended Installation Depth (A+B+C)
OD : 75mm (2.5") NB : 65 mm											
Medium	3.93	4496	2800	15.00	150	105	344	138	348	98	584
Standard	4.75	5934	3600	18.00	180	126	413	200	418	125	743
Heavy	6.12	7432	4200	27.00	270	189	620	386	627	180	1193
Super Heavy	7.75	9194	5300	35.00	350	245	804	636	812	203	1651
OD : 88mm (3") NB : 80 mm											
Medium	4.85	5934	4000	11.00	110	77	253	126	349	120	595
Standard	6.60	9112	5010	18.00	180	126	413	277	572	220	1069
Heavy	8.70	10000	6000	27.00	270	189	620	548	857	380	1785
Super Heavy	10.61	12000	7250	35.00	350	245	804	870	1111	418	2399
OD : 113mm (4") NB : 100 mm											
Medium	7.60	11402	4500	10.00	100	70	230	175	549	181	905
Standard	9.80	12150	7250	16.00	160	112	367	363	879	326	1568
Heavy	14.45	15980	5950	27.00	270	189	620	910	1484	441	2835
Super Heavy	16.45	19500	12000	35.00	350	245	804	1349	1924	455	3728
OD : 140mm (5") NB : 125 mm)											
Medium	13.25	12000	7540	10.00	100	70	230	305	859	176	1340
Standard	16.15	16000	10100	16.00	160	112	367	598	1374	377	2349
Heavy	18.90	23860	15100	27.00	270	189	620	1191	2319	465	3975
Super Heavy	24.50	30000	18000	35.00	350	245	804	2009	3006	478	5493
OD : 165mm (6") NB : 150 mm)											
Standard	30.00	22500	12550	16.00	160	112	367	1110	1979	650	3739
Heavy	35.00	40000	23500	27.00	270	189	620	2520	3340	980	6840

Accessories for uPVC Column Pipes

Cast Iron (CI) Top & Bottom Adaptor

Suitable for Medium, Standard & Heavy Column Pipes



Bottom Top

Specification

Metal	CI
Diameter	1" to 6"
Finishing	Colour Coated
Thickness	7mm to 12mm
Connection	Square Thread / Pipe Thread*

Cast Iron (CI) S.H Bottom Adaptor

Suitable for Super Heavy Column Pipes



Bottom

Specification

Metal	CI
Diameter	1.1/4" to 6"
Finishing	Colour Coated
Thickness	8mm to 12mm
Connection	Square Thread / Pipe Thread*

Mild Steel (MS) Top Adaptor

Suitable for Medium, Standard & Heavy Column Pipes



Top

Specification

Metal	MS
Diameter	1" to 6"
Finishing	Colour Coated
Thickness	5mm to 9mm
Connection	Square Thread / Pipe Thread*

Note :

Top Adaptors - Double Clamp

* Available with both BSP & NPT Connections

Mild Steel (MS) S.H Top Adaptor

Suitable for Super Heavy Column Pipes



Top

Specification

Metal	MS
Diameter	1.1/4" to 6"
Finishing	Colour Coated
Thickness	6mm to 12mm
Connection	Square Thread / Pipe Thread*

Accessories for uPVC Column Pipes

Stainless Steel Top & Bottom Adaptor

Suitable for Medium, Standard & Heavy Column Pipes



Top Bottom

Specification

Metal	SS 304
Diameter	1" to 6"
Finishing	Glossy / Matte Steel Finish
Thickness	5mm to 9mm
Connection	Square Thread / Pipe Thread*

Note : Top Adaptors - Double Clamp

Cast Iron (CI) Reducer & Expander - Bottom



Reducer Expander

Specification

Metal	CI
Diameter	1.1/4" x 1" to 5" x 4" (Reducer) 1" x 1.1/4" to 4" x 5" (Expander)
Finishing	Colour Coated
Thickness	7mm to 12mm
Connection	Square Thread / Pipe Thread*

Note : * Available with both BSP & NPT Connections

Stainless Steel 304 (SS) S.H Top Adaptor

Suitable for Super Heavy Column Pipes



Top

Specification

Metal	SS 304
Diameter	1.1/4" to 6"
Finishing	Glossy / Matte Steel Finish
Thickness	6mm to 10mm
Connection	Square Thread / Pipe Thread*

Note : Top Adaptors - Double Clamp

Stainless Steel Reducer & Expander - Bottom



Reducer Expander

Specification

Metal	SS 304
Diameter	1.1/4" x 1" to 5" x 4" (Reducer) 1" x 1.1/4" to 4" x 5" (Expander)
Finishing	Glossy / Matte Steel Finish
Thickness	6mm to 10mm
Connection	Square Thread / Pipe Thread*

Accessories for uPVC Column Pipes

ALGO PIPES
CONNECTING TECHNOLOGIES

Pump Guard MS Flange



Specification

Metal	MS
Diameter	1" to 6"
Finishing	Colour Coated
Thickness	8mm to 12mm
Connection	Stud Clamp Type

Pump Guard SS 304 Flange



Specification

Metal	SS 304
Diameter	1" to 6"
Finishing	Glossy / Matte Steel Finish
Thickness	8mm to 12mm
Connection	Stud Clamp Type

Pump Guard SS 202 ROD



Specification

Metal	SS 202
Diameter	17", 20", 22", 24", 26" & 27"
Finishing	Glossy / Matte Steel Finish
Thickness	12mm
Connection	Stud Clamp Type



Mild Steel Lowering Jig



Specification

Metal	SS 202
Diameter	1" to 6"
Finishing	Colour Coated
Thickness	6mm to 12mm
Connection	Square Thread / Hook Type

Container Stuffing Details

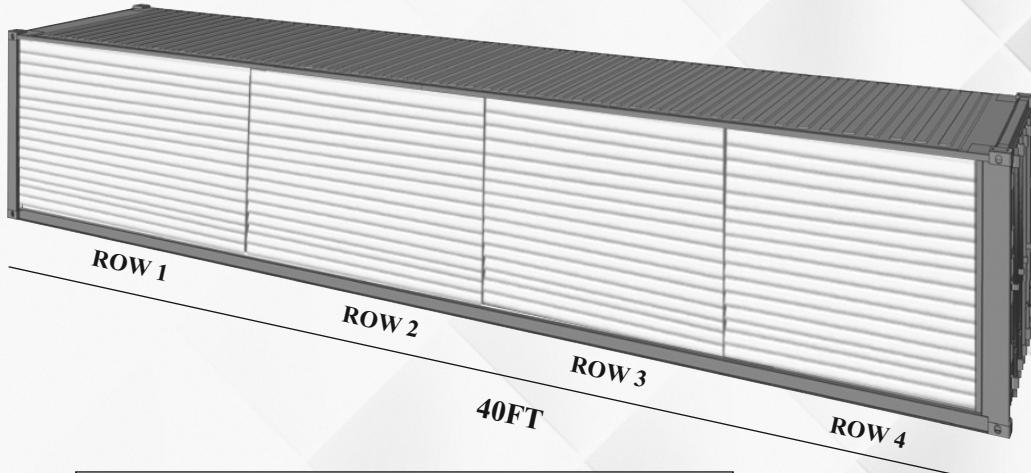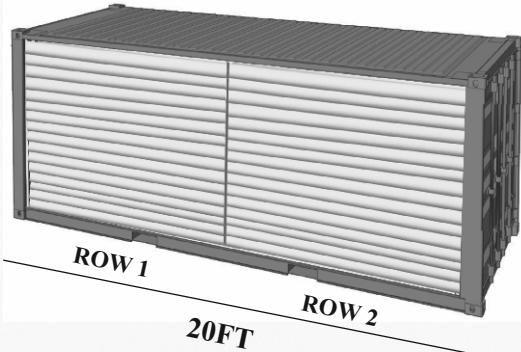

- The length of pipe will be 2.9m for 20 feet Container
- In case of 6m pipes for 20 ft the pipe length will be 5.8m and number of Rows will be 1.

- The length of pipe will be 3m for 40 feet Container
- In case of 6m pipes for 40 ft the pipe length will be 6m and number of Rows will be 2.

CONTAINER STUFFING DETAILS

Pipe Size	No of Pipes per bundle	No of Bundles per Row	Total No of Pipes per Row	No. of Rows without Capillary (20 ft)	No. of Rows with Capillary (20ft)	No. of Rows without Capillary (40ft)	No. of Rows with Capillary (40ft)
1"	25	150	3750	2	1	4	3
1.25"	25	90	2250	2	1	4	3
1.5"	20	85	1700	2	1	4	3
2"	10	100	1000	2	1	4	3
2.5"	10	68	680	2	1	4	3
3"	5	100	500	2	1	4	3
4"	5	65	325	2	1	4	3
5"	3	65	195	2	1	4	3
6"	2	48	96	2	1	4	3

Note : In Case of Mix of different sizes the number of bundles and total number of pipes per row will vary according to the sizes.



Manufactured by:

ALGO Fluid Systems Pvt. Ltd.

Survey No. 185, Ahmedabad-Mehsana
Highway, Ghumasan Road, Chandarda,
Ta- Kadi, Dist- Mehsana, Gujarat - 384450.
(India)

Tel.: +91- 2764-234240 / 93164 31347

E-mail: sales@algopumps.com

ALGO Fluid Technicks Sa Pty Ltd

Unit 20, Mifa Industrial Park399,
George Street Randjies Park,
Midrand - 1685, Johannesburg,
Gauteng

Tel.:+27 73 160 4791

E-mail: info@algopump.co.za



An ISO 9001 & 14001 Company

INTL. STOCK HUBS : NAIROBI - KENYA, VALENCIA - SPAIN



www.algopumps.com