


NextOne

Pinout diagram

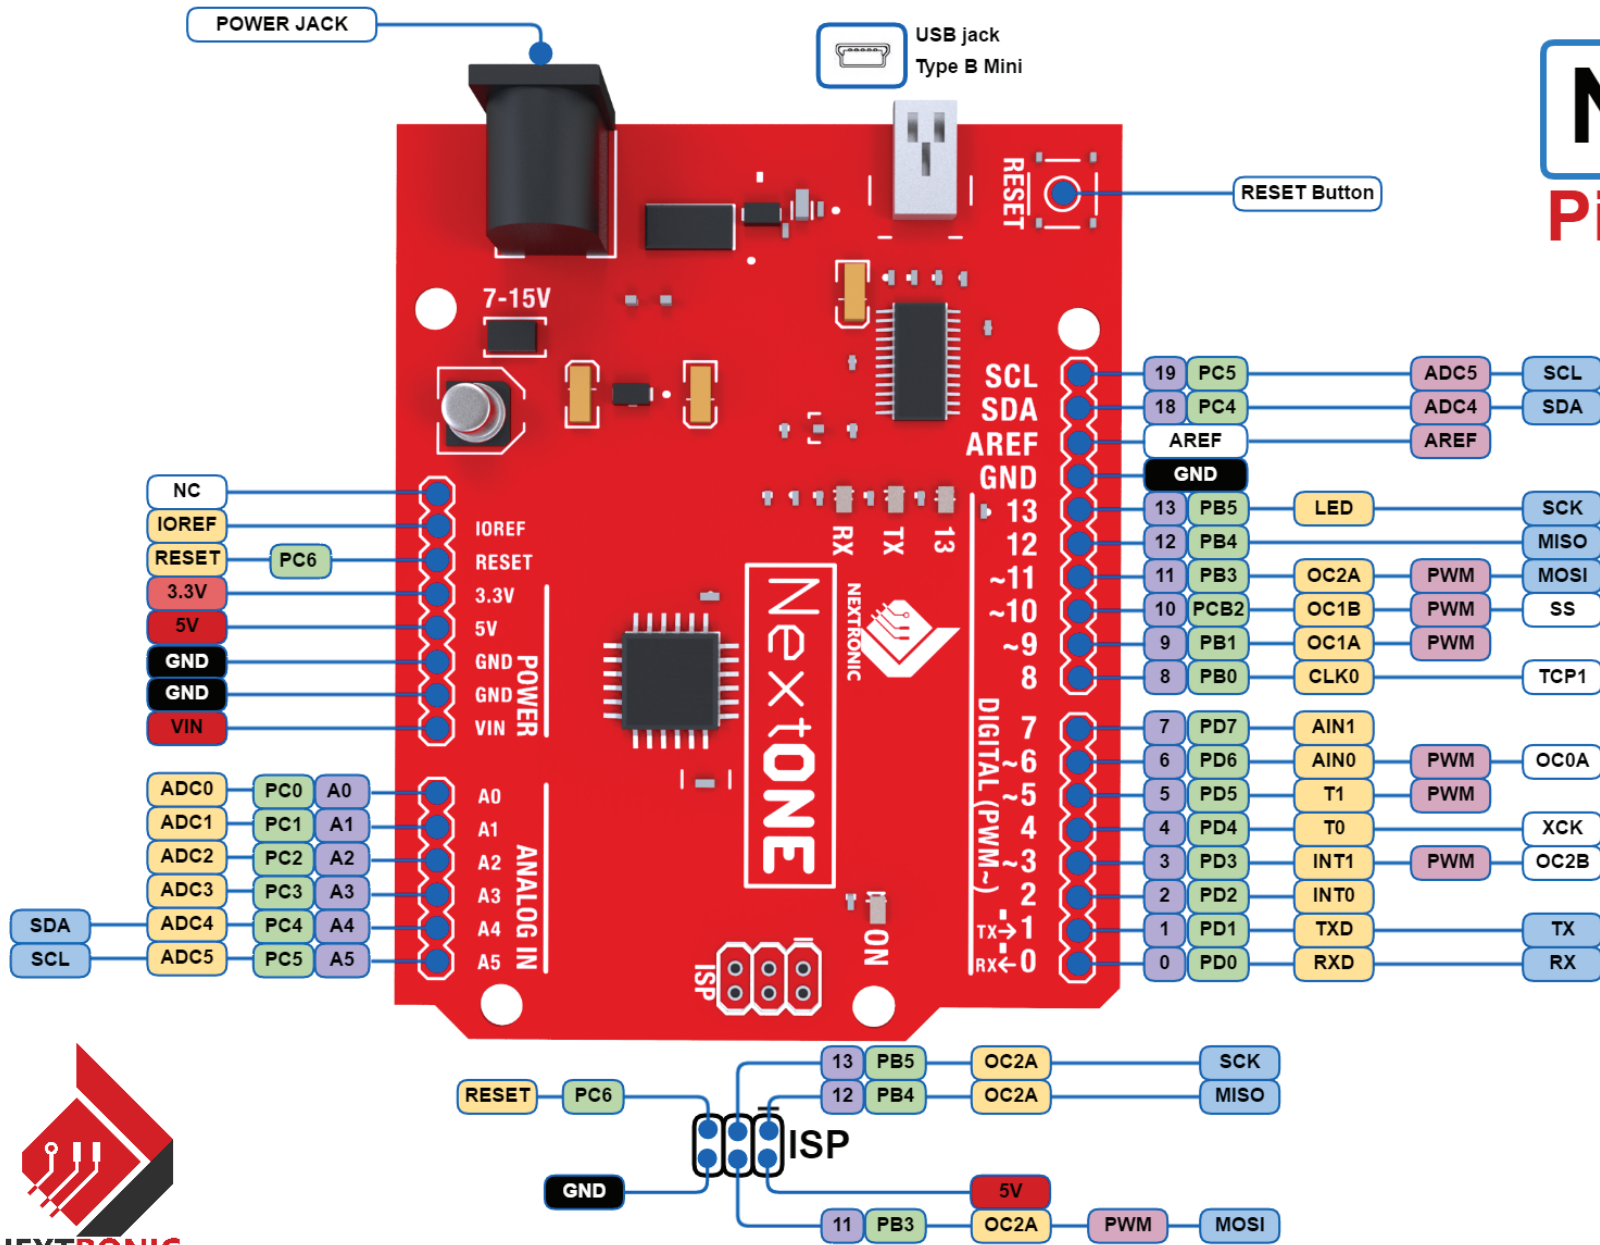

- GND**
- Power**
- IDE PIN**
- Control**
- Pin Function**
- PWM**
- Serial Pin**
- Other Function**

- ATmega328
- FTDI USB Programming
- Input voltage - 7-15V
- 14 Digital I/O Pins
- 6 PWM outputs
- 6 Analog Inputs
- ISP Header
- 32k Flash Memory
- 16MHz Clock Speed
- R3 Shield Compatible



Made in Morocco