
INSIDE POCKETS ARE CUT IN THE 3D FILE. The views give the outline (hidden edges dashed); the pockets are dimensioned in the table, taken from the model at this size.


POCKETS AND OPENINGS, mm and deg (thin.py v9 at this size)

Ring size bore 21.3836	**US 12**
Joystick opening centre (exterior) round opening dia 5.6 through the wall, axis on the radial line; frame FRM1 bonded in it	**-78.0 deg**
Joystick pocket from the bore to the roof r 12.1218 (flange top + 0.05)	**7.0 x 6.8**
Channel not cut over the joystick about the joystick centre	**+-16.289 deg**
Band channel r 10.6918 to 12.7918, from +30 through the bottom to -30 deg	**7.0 wide (edge walls 0.50, model v8)**
Motor pocket axis at -42.5 deg, X 0.8; floor 0.05 under the motor	**dia 5.2 x 2.65**
Floor slots (2) X -3.55 to -1.45, Y +-5.9, from Z -1.45 to 1.00 (model v8)	**2.1 x 0.6**
Radio corner RC1 (resin, own part) Y 2.05 to the outer skin, all Z: cut away from the metal body, bonded on the planes X -8.60 and Y 2.05 (model v9)	**X -14.80 to -8.60**
Antenna floor pocket (in RC1) X -12.60 to -9.00, Y 4.25 to 6.25, floor top Z 0.40 down to Z 0.20 (model v9)	**3.60 x 2.00 x 0.20**
Panel pocket floor top Z 0.40	**27.45 x 12.9, R 0.1**
Microphone pockets (2) centres X +-10.8, Y -4.775	**4.4 x 3.35 x 0.10**
Glass seat under the glass footprint, outside the panel pocket	**lowered 0.05**
Cable fold pocket centre X -13.775	**0.55 x 5.4 x 2.0**


TOP (X right, Y up)

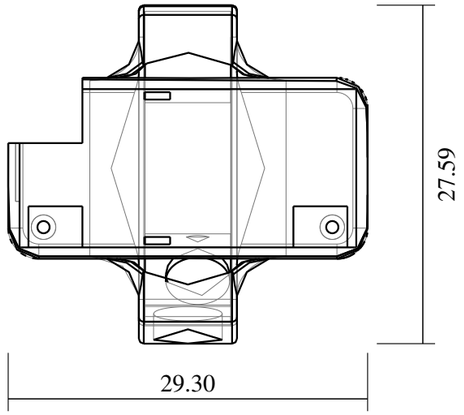

FRONT (X right, Z up)

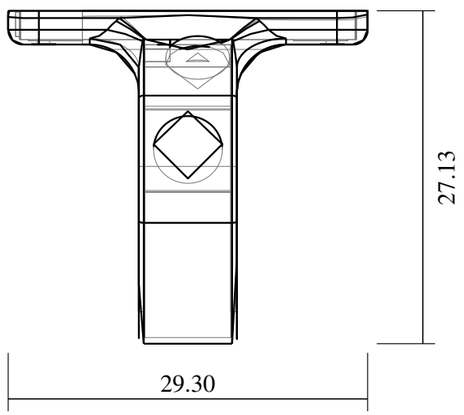

RIGHT SIDE (Y right, Z up)

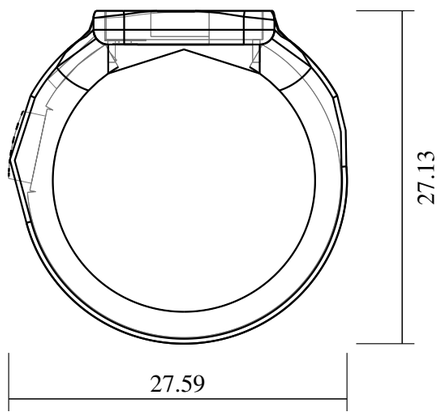

Third-angle projection. Solid lines visible, dashed grey hidden. Overall size X 29.30 x Y 27.59 x Z 27.13 mm (STEP axes).

PART	Metal body (block and band), inside pockets cut
REFERENCE	HSG1
MATERIAL	Ti-6Al-4V grade 5, gloss black Oerlikon Balzers BALINIT DLC, 1 to 3 um
SCALE	2:1
DESIGN VERSION	inside model v9 (2026-11-13)
DATE	2026-11-13
FILE	body-us12.step in design/mfg/parts/body/

ALL DIMENSIONS IN MM General tolerance ISO 2768-m (default). Overall size from the STEP bounding box.