

TABLES OF CONTENTS

PAGE	CONTENT
01	REVISION HISTORY
02	BLOCK DIAGRAM
03	VOLTAGE SOURCE
04	MCU
05	PERIPHERALS
06	4 DIGIT 7 SEGMENT

REVISION HISTORY

VER#	DATE	REVERSION	DESCRIPTON OF CHANGES	AUTHOR
1.0	14/08/2025	Arduino_DIY_V1.0		Nguyen Quang Minh

1

2

3


4

5

6


7

8

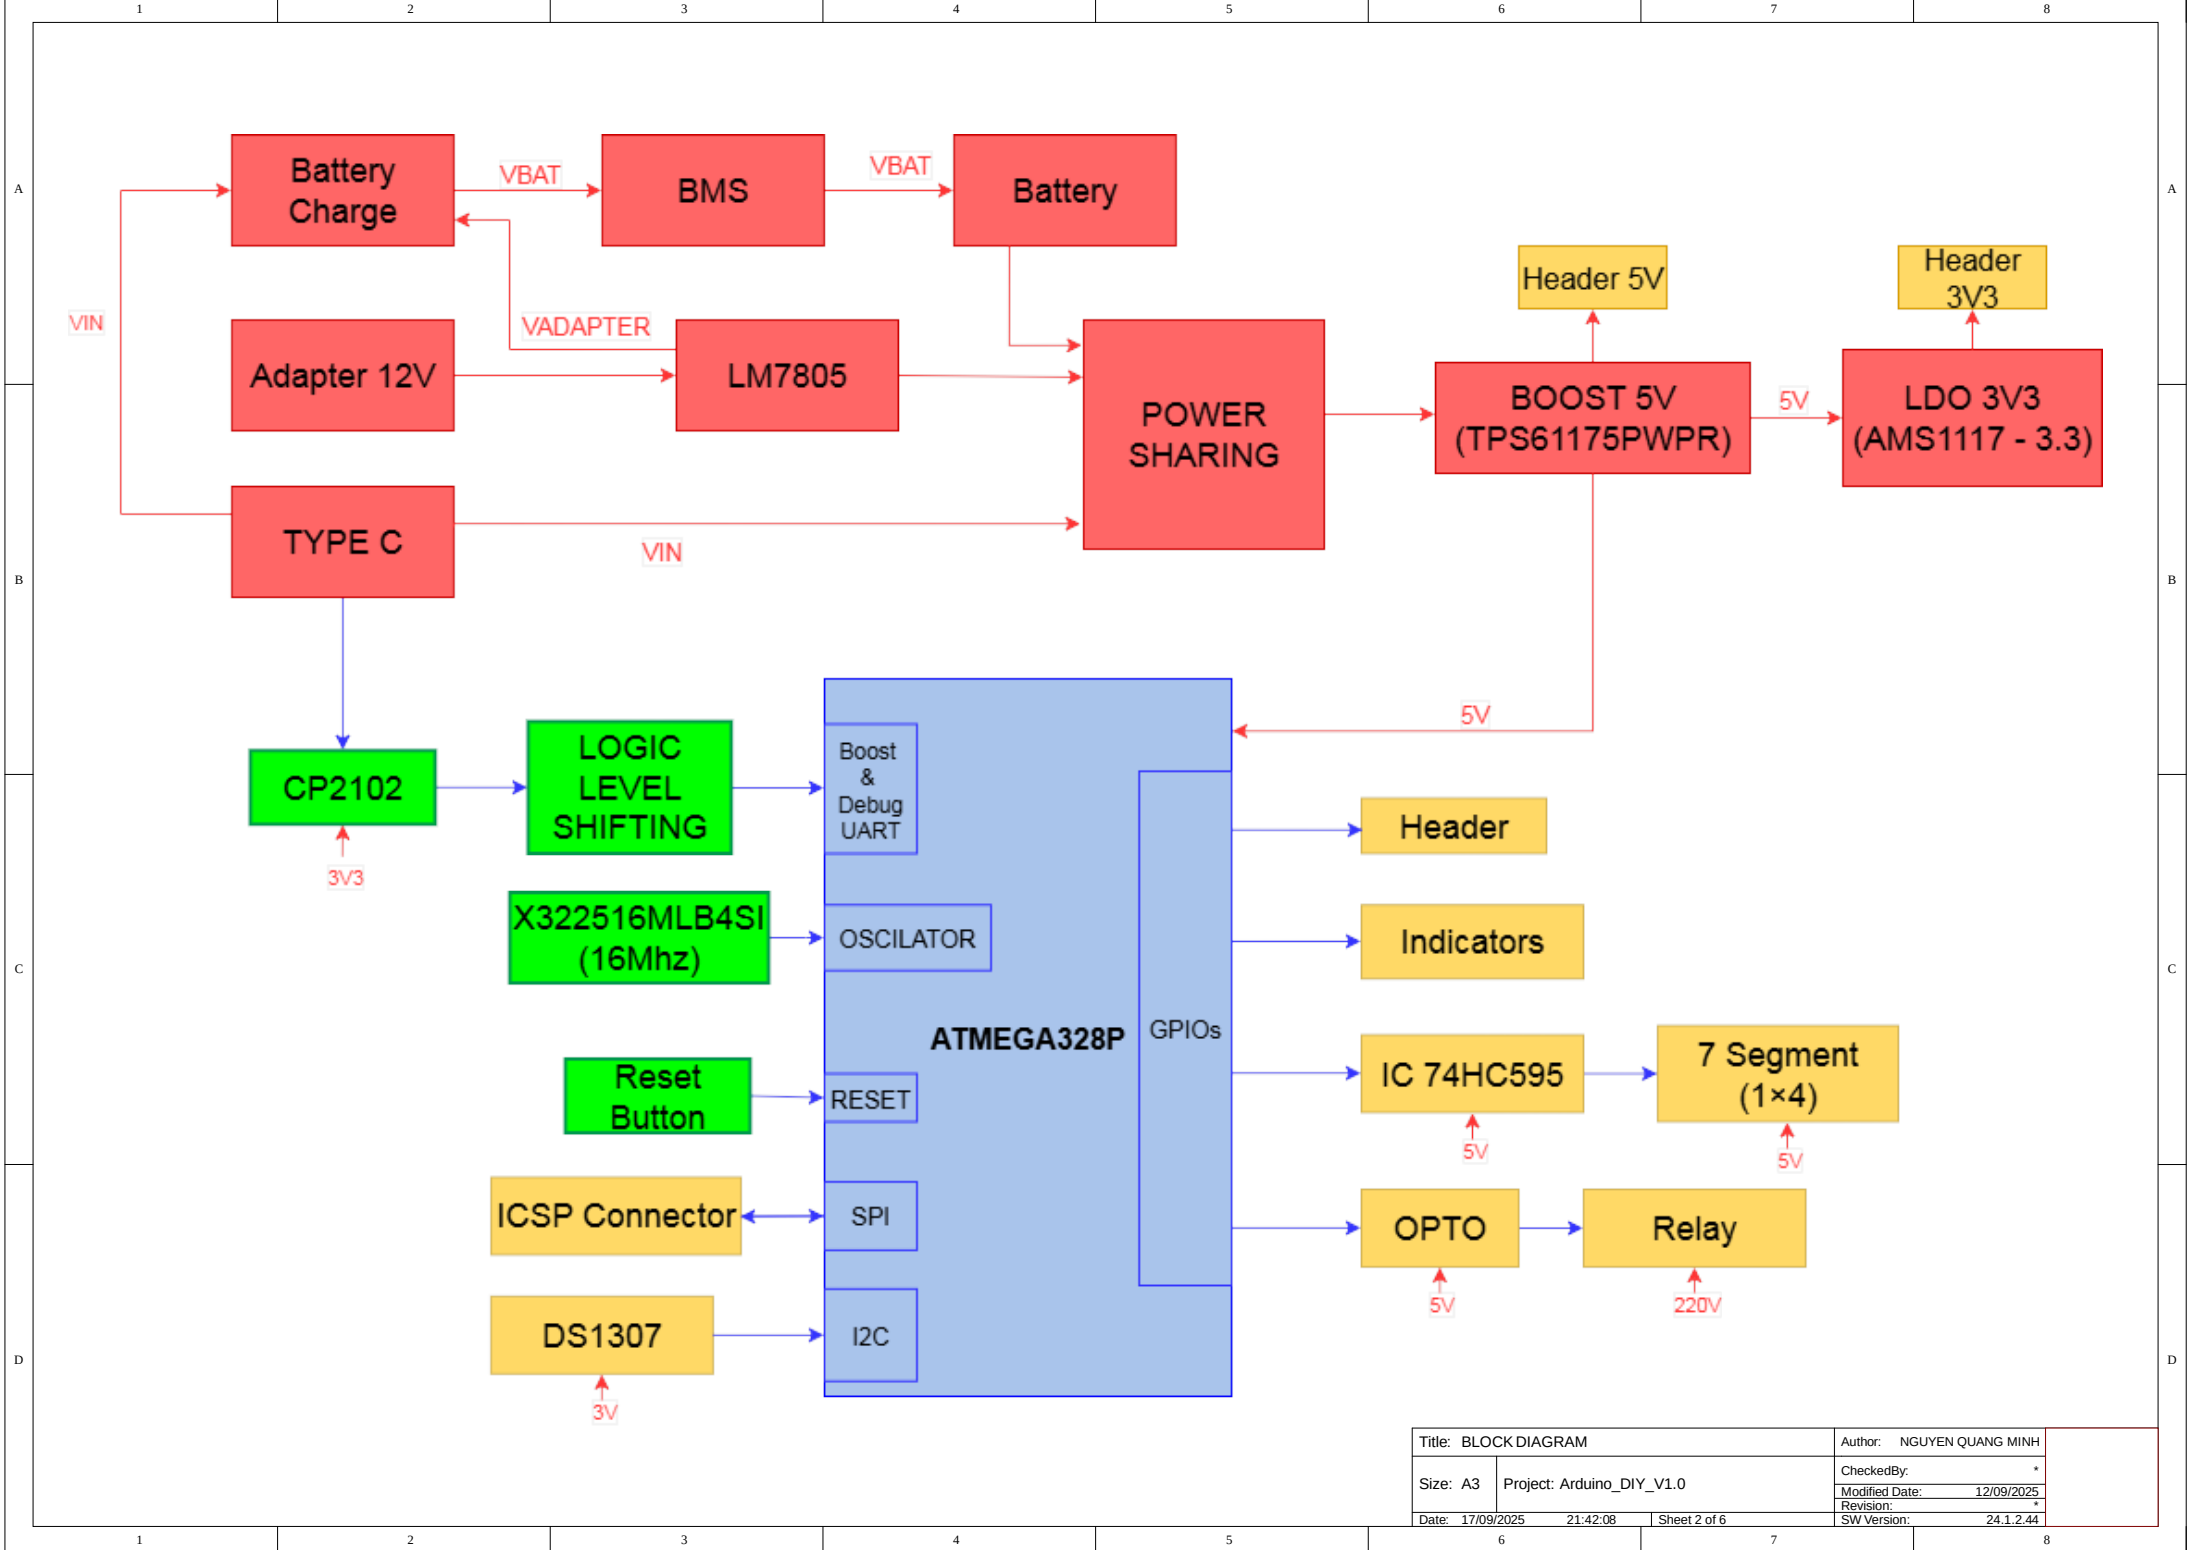


Title: BLOCK DIAGRAM			Author: NGUYEN QUANG MINH	
Size: A3	Project: Arduino_DIY_V1.0		CheckedBy: *	
Date: 17/09/2025		21:42:08	Modified Date: 12/09/2025	
Sheet 2 of 6			Revision: *	
			SW Version: 24.1.2.44	


TYPE C

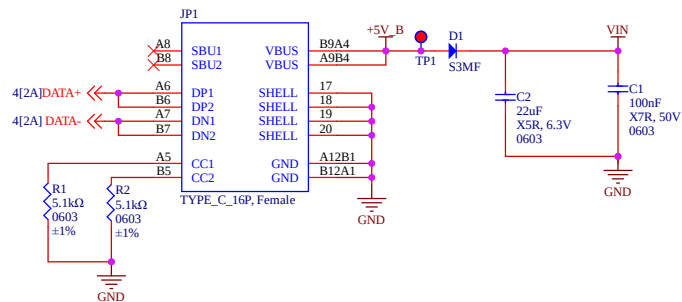


ADAPTER 12V

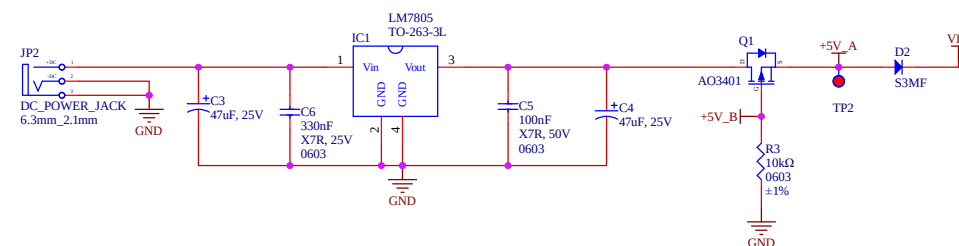


POWER SHARING

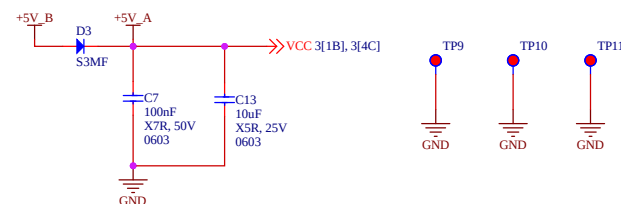


BATTERY

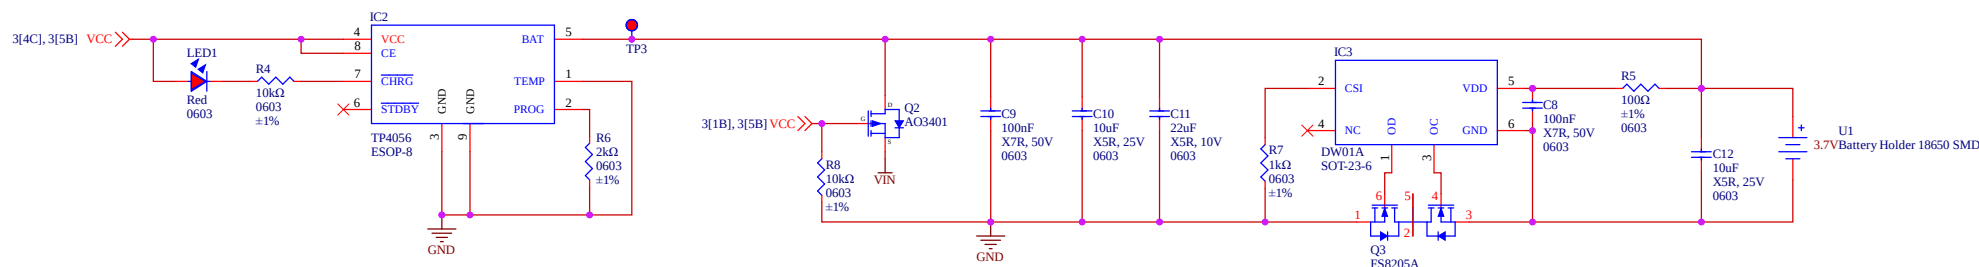

POWER 5V

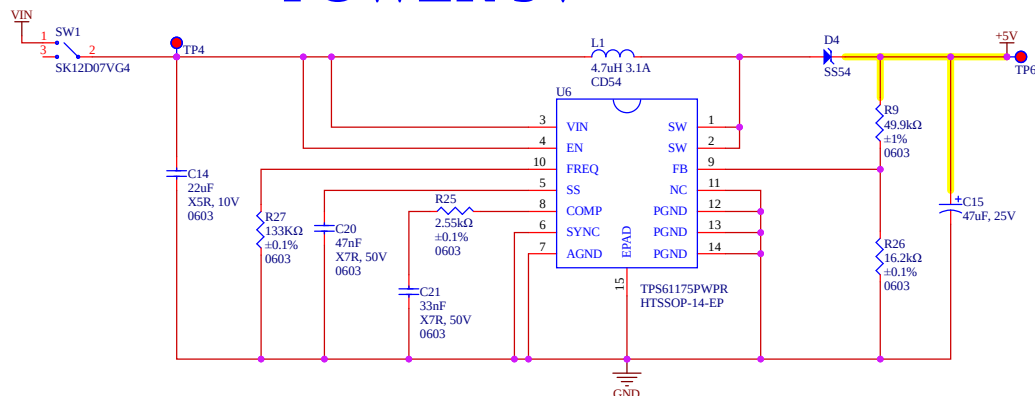


POWER 3V3

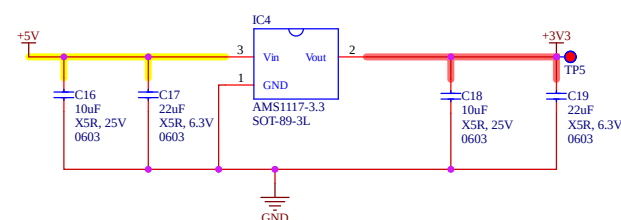


Title: VOLTAGE SOURCE			Author: NGUYEN QUANG MINH		Cannot open file D:\Admin\Github\IoT_SOLUTIONS_LOAPAY\Documents\Template\LOGO_
Size: A3	Project: Arduino_DIY_V1.0		CheckedBy:	*	
			Modified Date:	14/09/2025	
			Revision:	*	
Date: 17/09/2025	21:42:08	Sheet 3 of 6	SW Version:	24.1.2.44	

Cannot open file
D:\Admin\Github\IoT_SOLUTIONS_LOADPAY\Documents\Template\LOGO_


BOOST AND DEBUG

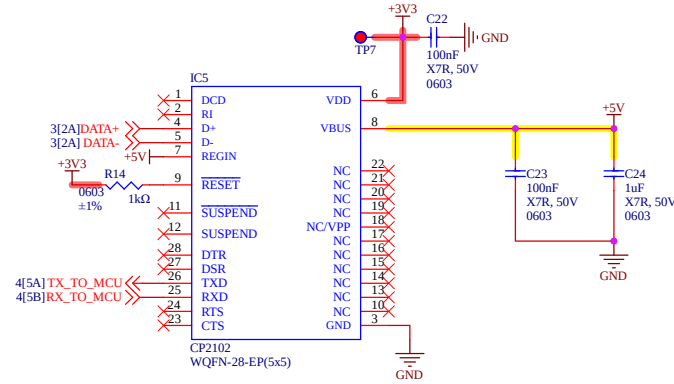


LOGIC LEVEL SHIFTING

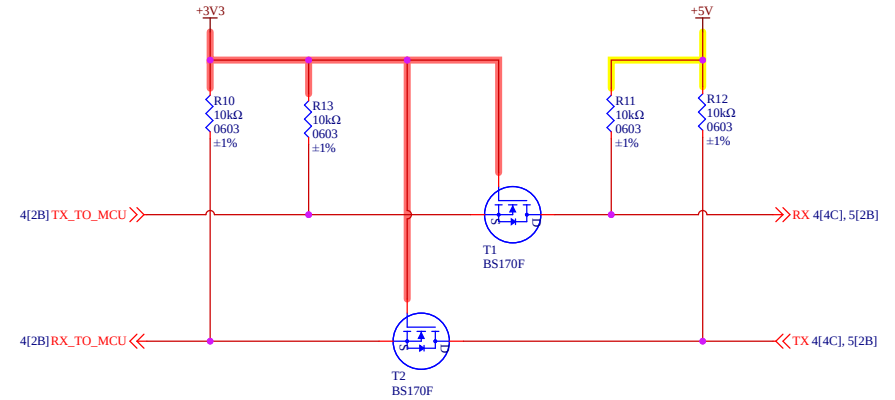


MCU

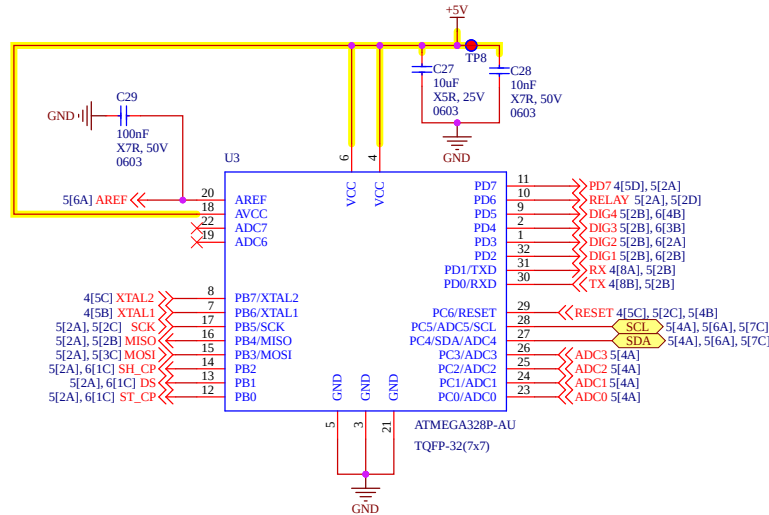


OSCILATOR

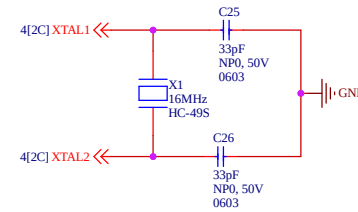

RESET BUTTON

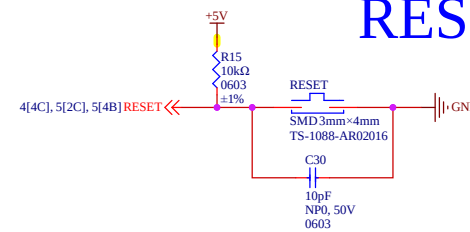




LED INDICATOR





Title: MCU		Author: NGUYEN QUANG MINH		Cannot open file D:\Admin\Githu b\IoT_SOLUTI ONS_LOAPAY \Documents\Te mplate\LOGO_
Size: A3	Project: Arduino_DIY_V1.0	CheckedBy:	*	
Date: 17/09/2025	21:42:09	Modified Date:	14/09/2025	
		Revision:	*	
		SW Version:	24.1.2.44	

H1	
1	2 PB5 << SCK 4[2C], 5[2C]
2	1 PB4 >> MISO 4[2C], 5[2B]
3	3 PB3 >> MOSI 4[2C], 5[3C]
4	4 PB2 >> SH_CP 4[2C], 6[1C]
5	5 PB1 >> DS 4[2C], 6[1C]
6	6 PB0 >> ST_CP 4[2C], 6[1C]


GP 2.54mm Female Header

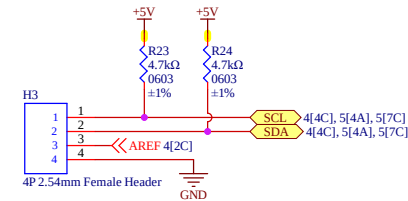

Pinout diagram for ICSP programming of the ATmega328P. The diagram shows a 2x3P 2.54mm Female Header with pins 1 through 6. Pin 1 is MISO (4[2C], 5[2A]), Pin 2 is SCK (4[2C], 5[2A]), Pin 3 is RESET (4[4C], 4[5C], 5[4B]), Pin 4 is GND, Pin 5 is MOSI (4[2C], 5[2A]), and Pin 6 is +5V. The ICSP label is above the header, and the header label is below it.

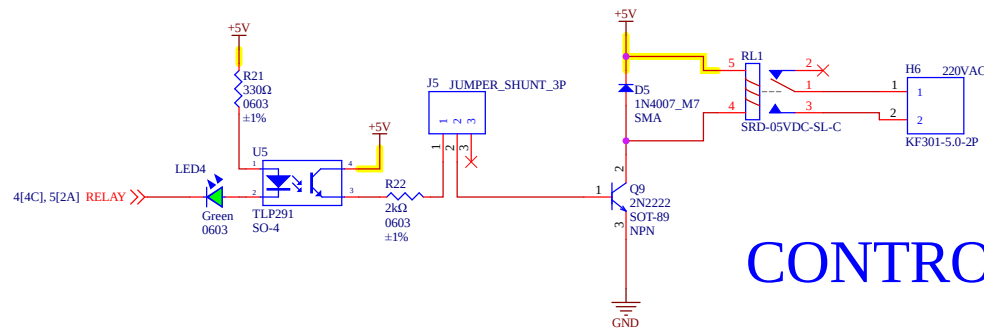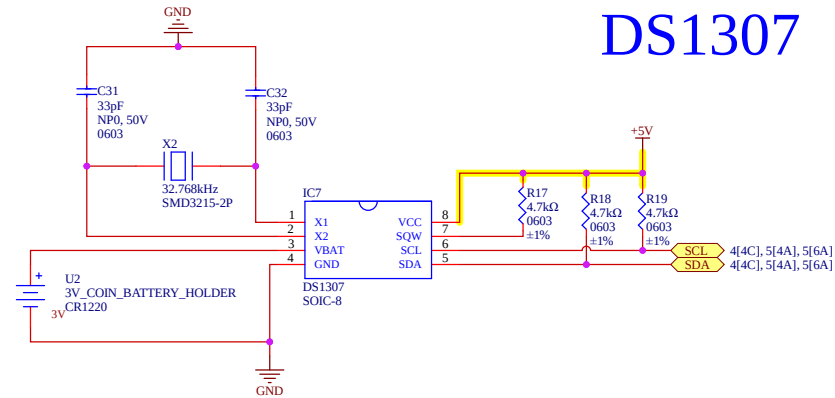

Title: PERIPHERALS			Author: NGUYEN QUANG MINH	Cannot open file D:\Admin\Githu b\IOT_SOLUTI ONS_LOAPAY Documents\Te mplate\LOGO_
Size: A3	Project: Arduino_DIY_V1.0		CheckedBy: *	
			Modified Date: 14/09/2025	
			Revision: *	
Date: 17/09/2025	21:42:09	Sheet 5 of 6	SW Version: 24.1.2.44	

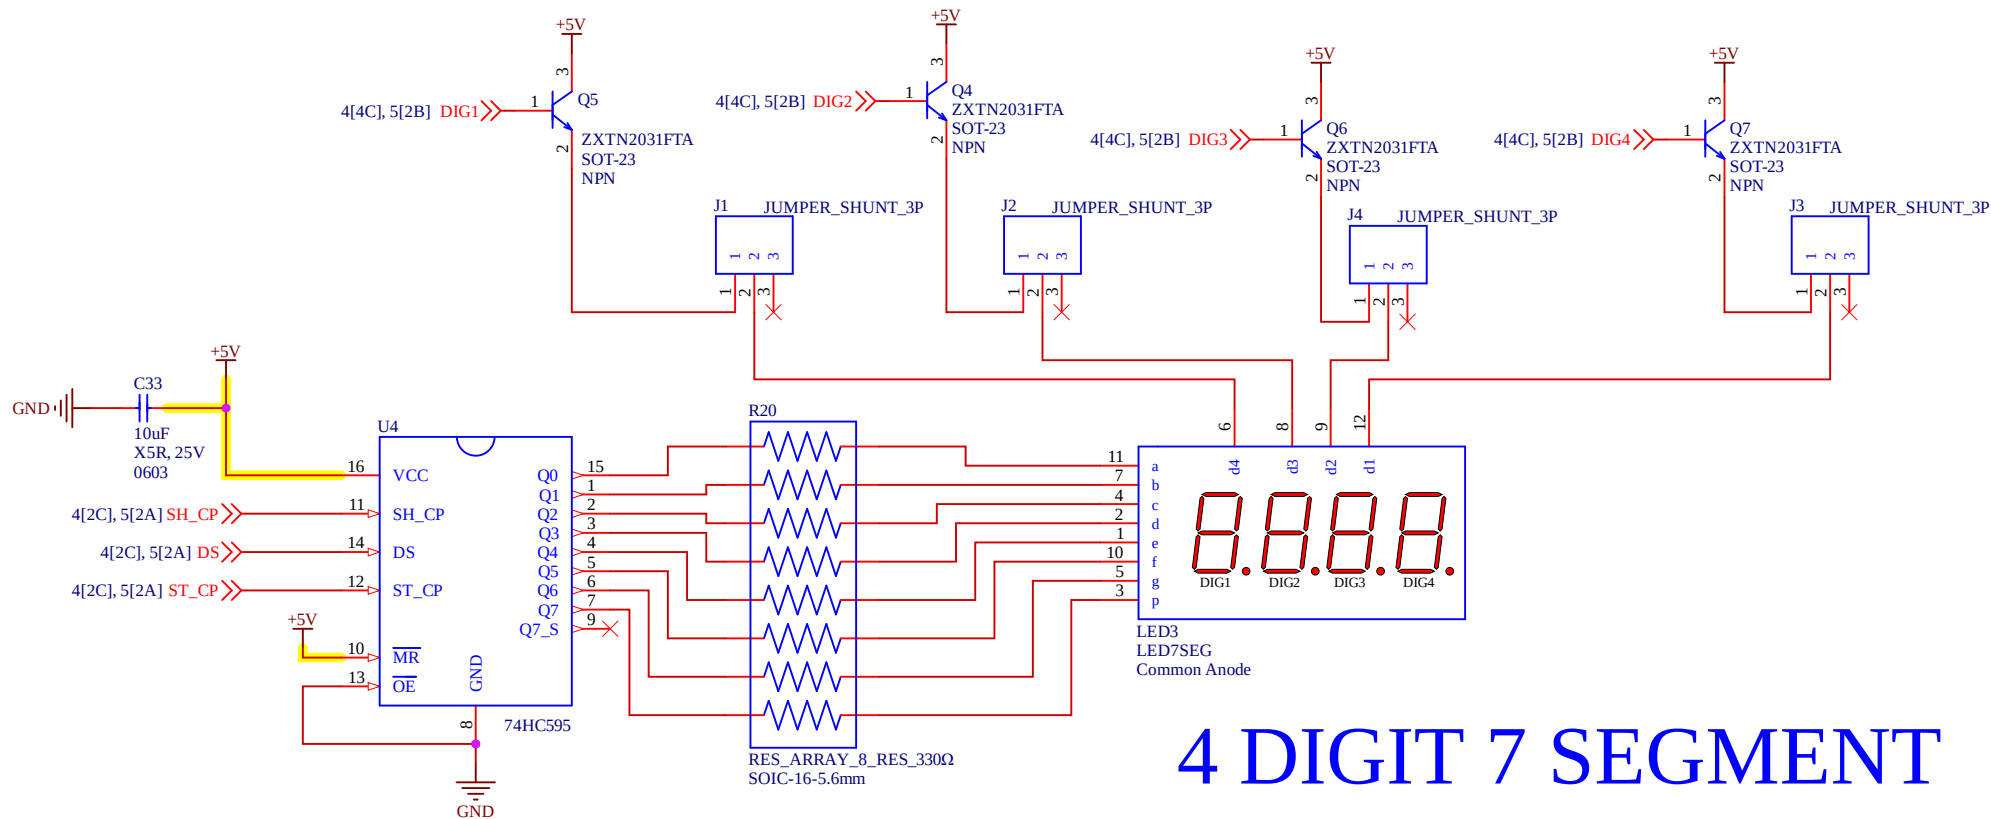

4 DIGIT 7 SEGMENT

Title: 4 DIGIT 7 SEGMENT		Author: NGUYEN QUANG MINH	Cannot open file D:\Admin\Github\IOT SOLUTIONS
Size: A4		Approved: CONFIDENTIAL	
Date: 17/09/2025 21:42:09		Modified Date: 14/09/2025	
Project:		Revision: *	
Sheet 6 of 6		SW Version: 24.1.2.44	