
RMIT Classification: Trusted

Automation Lab Survey

Station1: W4564-5A:

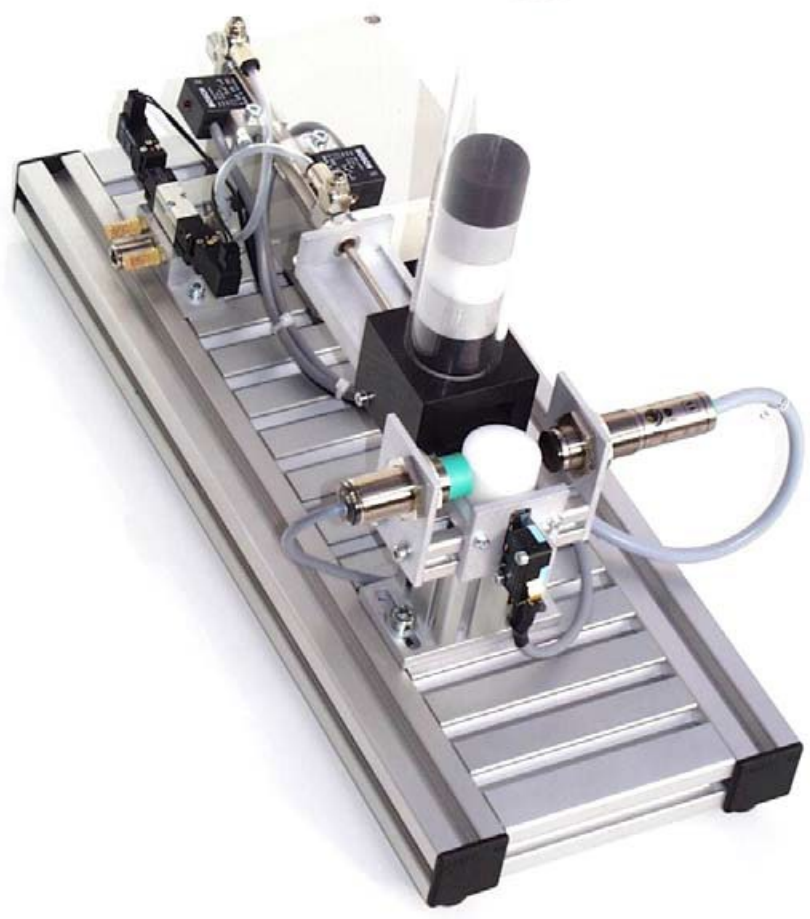

	PLC Address	Description
Input		
	I0.0	Sensor indicates Cylinder have retracted
	I0.1	Sensor indicates Cylinder have extended
	I0.2	Magazine is empty, no wo
	I0.3	Workpiece is ready for pick-up
	I0.4	Sensor detecting workpiece whether it is a white/black workpiece
	I0.5	Sensor detecting workpiece whether it is a metal workpiece
Output		
	Q0.0	Cylinder extends
	Q0.1	Cylinder retracts

Station2: W4564-5B:




	PLC Address	Description
Input		
	I0.6	Sensor indicates Cylinder at right position
	I0.7	Sensor indicates Cylinder at left position
Output		
	Q0.2	Cylinder rotates in clockwise direction
	Q0.3	Cylinder rotates in counterclockwise direction
	Q0.4	Vacuum suction cup attracts workpiece

Station3: W4564-5C:



	PLC Address	Description
Input		
	I1.0	Sensor indicates the vertical cylinder is in the down position
	I1.1	Sensor indicates the vertical cylinder is in the up position
	I1.2	Sensor indicates horizontal cylinder have retracted
	I1.3	Sensor indicates horizontal cylinder have extended
Output		
	Q0.5	Vertical cylinder goes down
	Q0.6	Vertical cylinder goes up
	Q0.7	Horizontal cylinder extends

Station4 W4564-D:

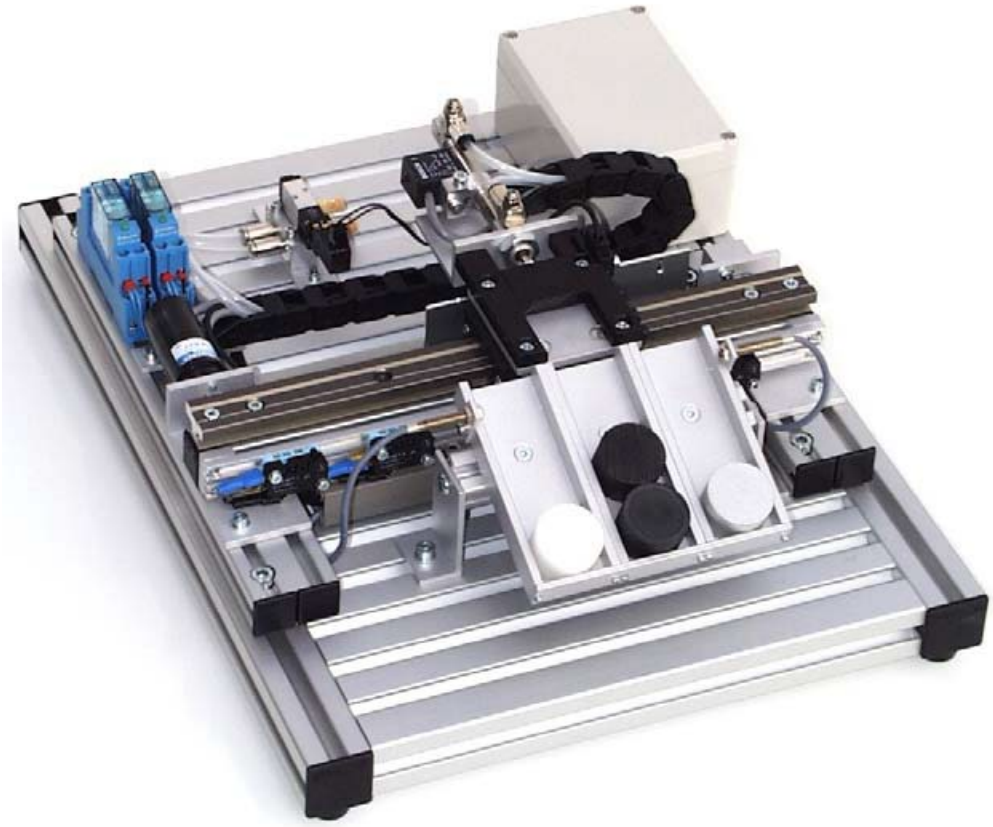

	PLC Address	Description
Input		
	I1.0	Sensor indicates that conveyor is positioned at the left limit.
	I1.1	Sensor indicates that conveyor is positioned at the right limit.
	I1.2	U-shape sensor identifies the position of Workpiece Holder
	I1.3	Sensor indicates that cylinder on Workpiece Holder extends
	I1.4	Optic Sensor (reflector type) detects workpiece
Output		
	Q1.0	Conveyor turns left
	Q1.1	Conveyor turns right
	Q1.2	Cylinder extends

Station5: 4764-5E:




	PLC Address	Description
Input		
	I1.4	Sensor indicating Horizontal Cylinder extend.
	I1.5	Sensor indicating Horizontal Cylinder retract. (broken)
	I1.6	Sensor indicating Vertical Cylinder extend.
	I1.7	Sensor indicating Vertical Cylinder retract(broken)
Output		
	Q1.0	Horizontal cylinder extends
	Q1.1	Horizontal cylinder extends
	Q1.2	Vertical cylinder moves down
	Q1.3	Driller rotates in clockwise direction
	Q1.4	Driller rotates in counterclockwise direction

Station6: W4564-5G:



	PLC Address	Description
Input		
	I2.0	Sensor indicates that vertical cylinder extended
	I2.1	Sensor generates pulses when disc rotating
	I2.2	Sensor indicates the rotating disc rotates in counterclockwise direction
	I2.3	Sensor indicates the rotating disc rotates in clockwise direction
Output		
	Q0.0	Vertical cylinder moves up
	Q0.1	Vacuum suction cup attracts the workpiece
	Q0.2	Rotating disc rotates in counterclockwise direction
	Q0.3	Rotating disc rotates in clockwise direction

Station7: W4764-5H:

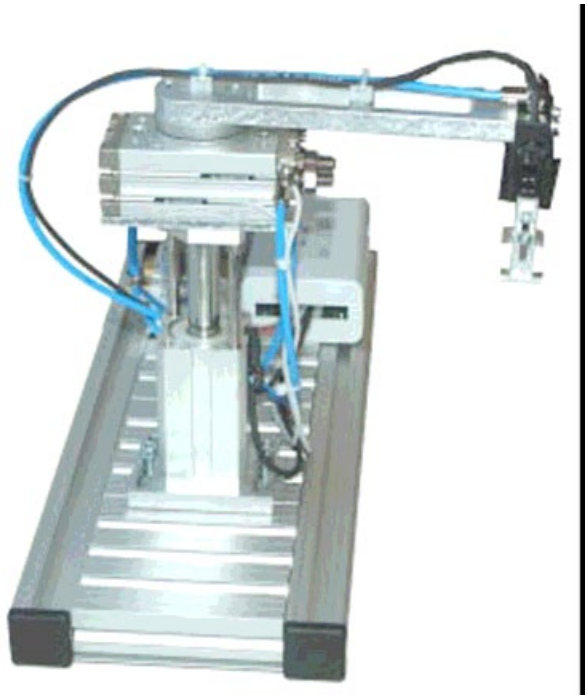

	PLC Address	Description
Input		
	I1.4	Sensor indicates that the vertical cylinder extended
	I1.5	Sensor indicates that the rotational cylinder is at limit position in counterclockwise direction
	I1.6	Sensor indicates that the rotational cylinder is at limit position in clockwise direction
	I1.7	Sensor indicates that the gripper griped
Output		
	Q3.2	Rotational cylinder rotates in counterclockwise direction
	Q3.3	Rotational cylinder rotates in clockwise direction
	Q3.4	Vertical Cylinder extends
	Q3.5	Gripper grips

Station8: W4764-5R:



	PLC Address	Description
Input		
	I0.5	Sensor indicates conveyor is positioned at the right limit (near motor)
	I0.6	Sensor generates pulses when horizontal conveyor moving
	I0.7	Sensor indicates the vertical cylinder is in the down position
	I1.0	Sensor generates pulses when vertical conveyor moving
	I1.1	Sensor indicates the horizontal cylinder retracted
	I1.2	Sensor detects the warehouse ‘s positions
	I1.3	Sensor indicates conveyor is positioned at the left limit
	I1.4	Sensor indicates the horizontal cylinder extended
	I1.5	Sensor indicates the vertical cylinder is in the up position
Output		
	Q0.3	Horizontal Conveyor moves left
	Q0.4	Horizontal Conveyor moves left
	Q0.5	Vertical Conveyor moves down
	Q0.6	Vertical Conveyor moves up
	Q0.7	Cylinder extends

Station9: W4764-5T



	PLC Address	Description
Input		
	I1.0	Sensor is below the rotating disc
	I1.1	Capacitive Sensor is above the rotating disc, at left position CBB8-18GS75-E2
	I1.2	Optic Sensor is above the rotating disc, at middle position, OPT200-18GM60-E5
	I1.3	Inductive sensor is above the rotating disc, at right position
Output		
	Q2.5	Metal lamp lights up
	Q2.6	Plastic Black lamp lights up
	Q2.7	Plastic White lamp lights up
	Q3.0	Rotary index table rotates in counterclockwise direction
	Q3.1	Rotary index table rotates in clockwise direction