
8 Schematic

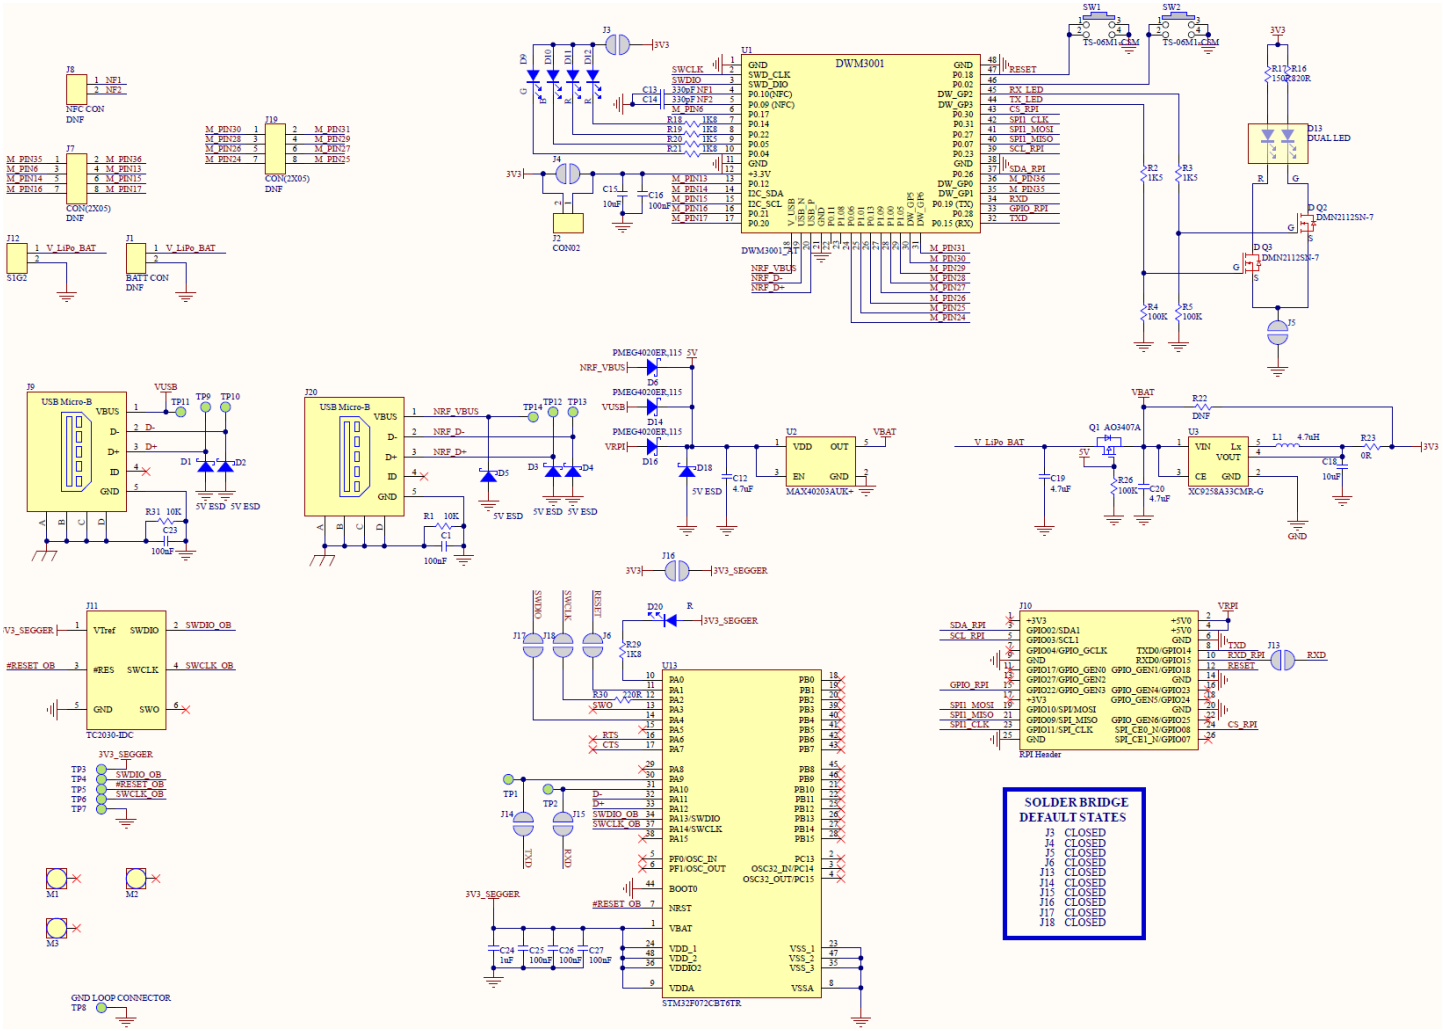

9 Antenna Delay Calibration

To measure range accurately, precise calculation of timestamps is required. To do this the antenna delay must be known. The DWM3001C allows this delay to be calibrated and provides the facility to compensate for delays introduced by PCB, external components, antenna and internal DWM3001C delays.

To calibrate the antenna delay, range is measured at a known distance using two DWM3001C systems. Antenna delay is adjusted until the known distance and reported range agree. The antenna delay can be stored in OTP memory.*

Note: For Engineering Samples DWM3001C.E1.0SR, DWM3001C.E1.0SQ, DWM3001C.E1.0SB and DWM3001CDKE1.0: do not use the Channel 5 Antenna Delay in OTP – use default value 16390.

Subject to change without notice | All rights reserved