



DAISY SEED SOCKET

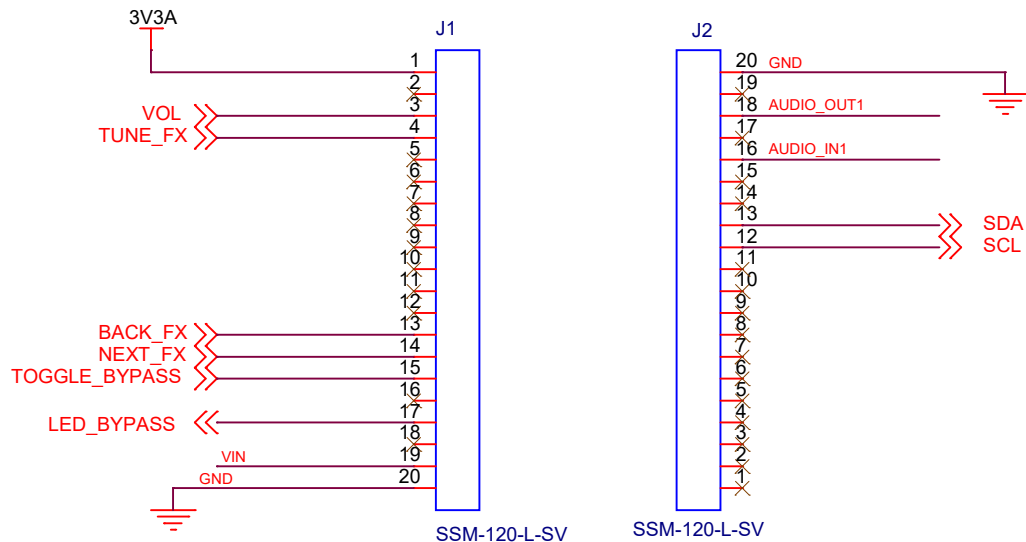


Analog ground and Digital ground must be connected together.
 J2: pin from 1 to 20
 J1: pin from 21 to 40
 VIN range: 4V to 17V
 GPIO pin range: 0V to 3.3V
 Audio signal range: -1.8V to 1.8V
 Distance between connectors: 15.24mm

DC CONNECTOR AND SWITCH

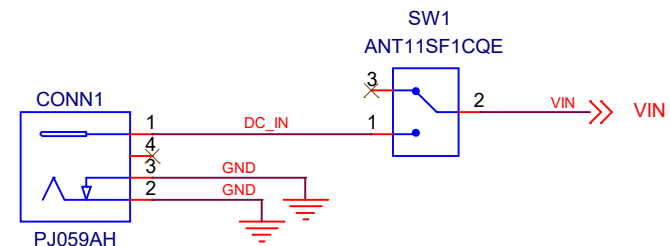


CONN1 must be place as close as possible to board outline.

INPUT JACK

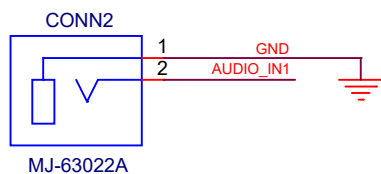

CONN2 must be place as close as possible to board outline.

OUTPUT JACK

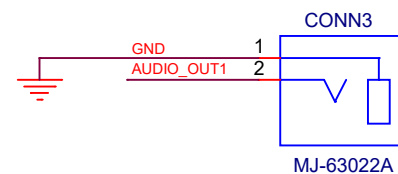

CONN3 must be place as close as possible to board outline.

Title
MultiFx - Daisy socket and Power

Size
A Document Number
Nese10

Rev
1.0

Date: Sunday, February 20, 2022 Sheet 1 of 3