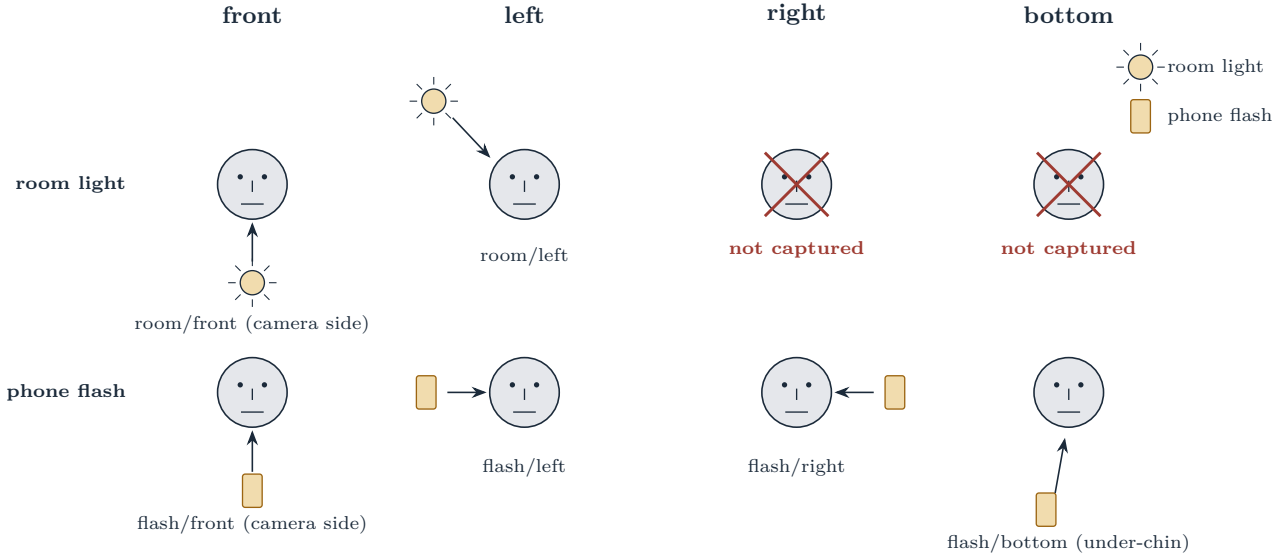


12 scans = six conditions × two repeats; **10 frames** per scan; one subject; captured 6 September 2026. Room light was only available from the front and left, so the design is unbalanced by necessity. Schematic only: left/right use a viewer/camera-frame convention and actual lamp positions were not recorded; front is drawn on the camera/phone side, bottom under-chin.

Each condition contributes a $(10, 512)$ matrix of unit-norm embeddings. Two repeats per condition provide the between-scan reference; frames within a scan are consecutive webcam frames, not independent photographs.