




SPI mode

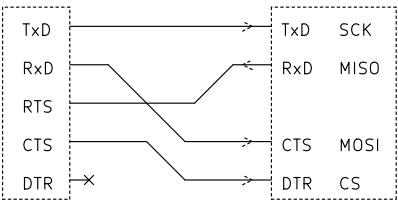


SPY mode




I2C mode

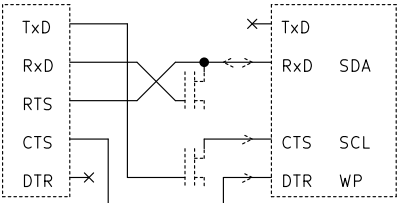

normal mode



UART mode



SPI connections

FTDI PIN	Function	Opto channel	Output pin
RxD	MOSI	DTR	RxD
TxD	SCK	TxD	TxD
CTS	CS	RTS	RTS
RTS	MISO	CTS	CTS

I2C connections

FTDI PIN	Function	Opto channel	Output pin
RxD	SDA_OUT	DTR	CTS
TxD	SCL	TxD	TxD
RTS	SDA_IN	CTS	CTS

