

Conductor Impedance

Conductor Width (W)

0.1509 mm

Conductor Height (H)

0.0994 mm

Frequency (MHz)

500

Zo

55.0687 Ohms

Lo


3.1182 nH/cm

Co

1.0283 pF/cm

Tpd

56.6246 ps/cm

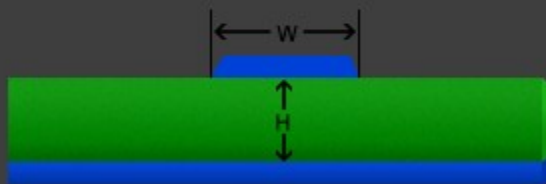

Options

Base Copper Weight

- ☐ 9um
- ☐ 18um
- ☒ 35um
- ☐ 53um
- ☐ 70um
- ☐ 88um
- ☐ 106um
- ☐ 142um
- ☐ 178um

Plating Thickness

- ☒ Bare PCB
- ☐ 18um
- ☐ 35um
- ☐ 53um
- ☐ 70um
- ☐ 88um
- ☐ 106um

Passive Circuits

- ☒ Microstrip
- ☐ Microstrip Embed
- ☐ Stripline
- ☐ Stripline Asym
- ☐ Dual Stripline
- ☐ Coplanar Wave

Information

Total Copper Thickness
35 um

Er Effective
2.8803

Units

- ☐ Imperial
- ☒ Metric

Substrate Options

FR-4 STD

Er

4.1

Tg (°C)

130

Temp Rise (°C)

20

Temp in (°F) = 36.0

Ambient Temp (°C)

22

Temp in (°F) = 71.6

Print

Solve!

Follow Us

