


Via Characteristics

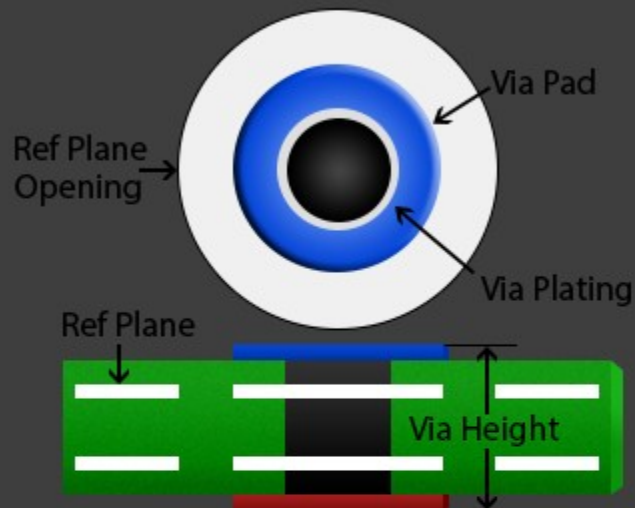

Via Hole Diameter

0.254 mm

Internal Pad Diameter

0.508 mm

Ref Plane Opening Diam

1.016 mm

Via Height

1.575 mm

Via Plating Thickness

0.0254 mm

IPC-2152 with modifiers mode

Via Capacitance

0.3585 pF

Via DC Resistance

0.00153 Ohms

Power Dissipation

0.00599 Watts

Via Inductance

1.3265 nH

Resonant Frequency

7298.762 MHz

Conductor Cross Section

0.0223 Sq.mm

Via Impedance

60.831 Ohms

Step Response

23.9863 ps

Via Current

1.9785 Amps

Options

Base Copper Weight

- ☐ 9um
- ☐ 18um
- ☒ 35um
- ☐ 53um
- ☐ 70um
- ☐ 88um
- ☐ 106um
- ☐ 142um
- ☐ 178um

Units

- ☐ Imperial
- ☒ Metric

Substrate Options

FR-4 STD

Er

4.1

Tg (°C)

130

Temp Rise (°C)

20

Temp in (°F) = 36.0

Plating Thickness

- ☒ Bare PCB
- ☐ 18um
- ☐ 35um
- ☐ 53um
- ☐ 70um
- ☐ 88um
- ☐ 106um

Property Selection

- ☒ Via Properties
- ☐ Via Stub Length

Ambient Temp (°C)

22

Temp in (°F) = 71.6

Layer Set

- ☐ 2 Layer
- ☒ Multi Layer
- ☐ Microvia

Print

Solve!

Information

Power Dissipation (dBm)
7.7751 dBm

Aspect Ratio = 6.20:1
J = 88.74 A/mm2

Via Temperature
42.0C

Via Thermal Resistance
179.3 °C/W

Via Count: **10**
17.9 °C/W per via

Via Voltage Drop
3.0282 mV