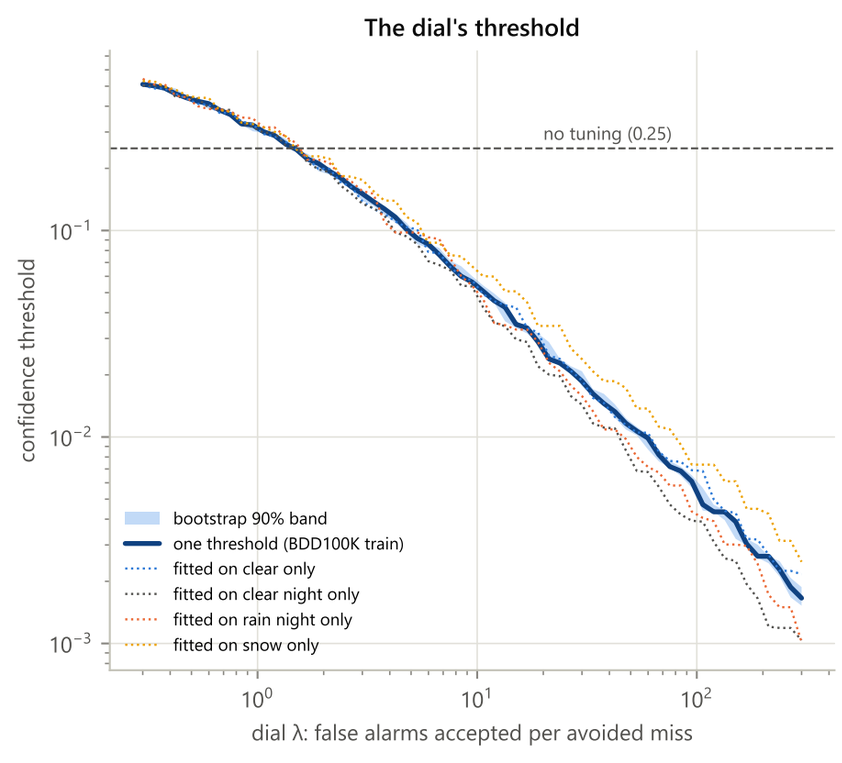
The dial's threshold
no tuning (0.25)
confidence threshold
10^{-1}
10^{-2}
10^{-3}
bootstrap 90% band
one threshold (BDD100K train)
fitted on clear only
fitted on clear night only
fitted on rain night only
fitted on snow only
10^{0}
10^{1}
10^{2}
dial λ: false alarms accepted per avoided miss

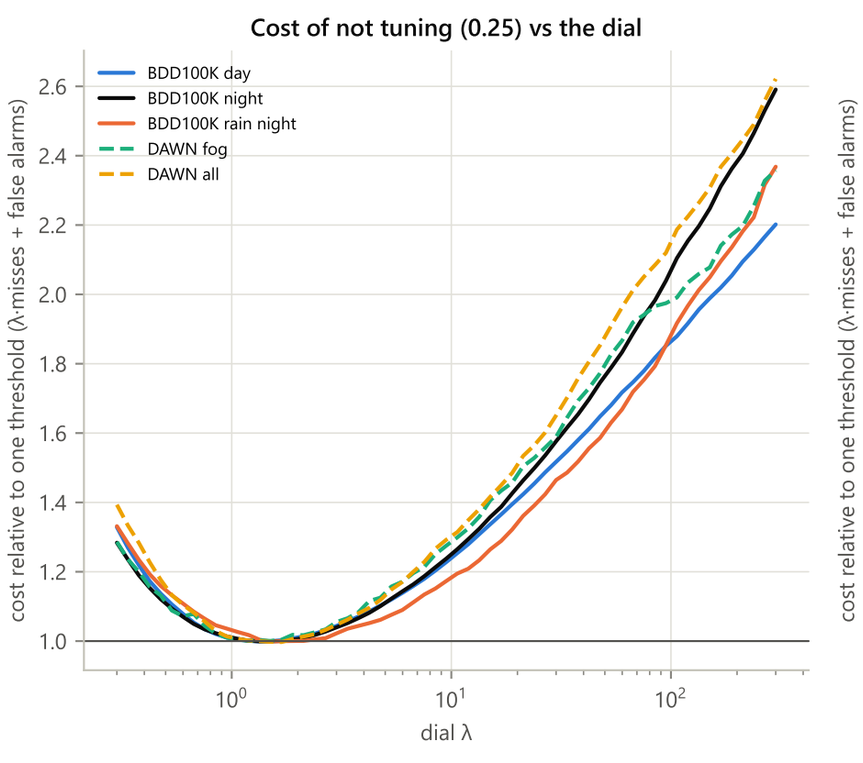
Cost of not tuning (0.25) vs the dial
BDD100K day
BDD100K night
BDD100K rain night
DAWN fog
DAWN all
cost relative to one threshold (λ·misses + false alarms)
2.6
2.4
2.2
2.0
1.8
1.6
1.4
1.2
1.0
10^{0}
10^{1}
10^{2}
dial λ

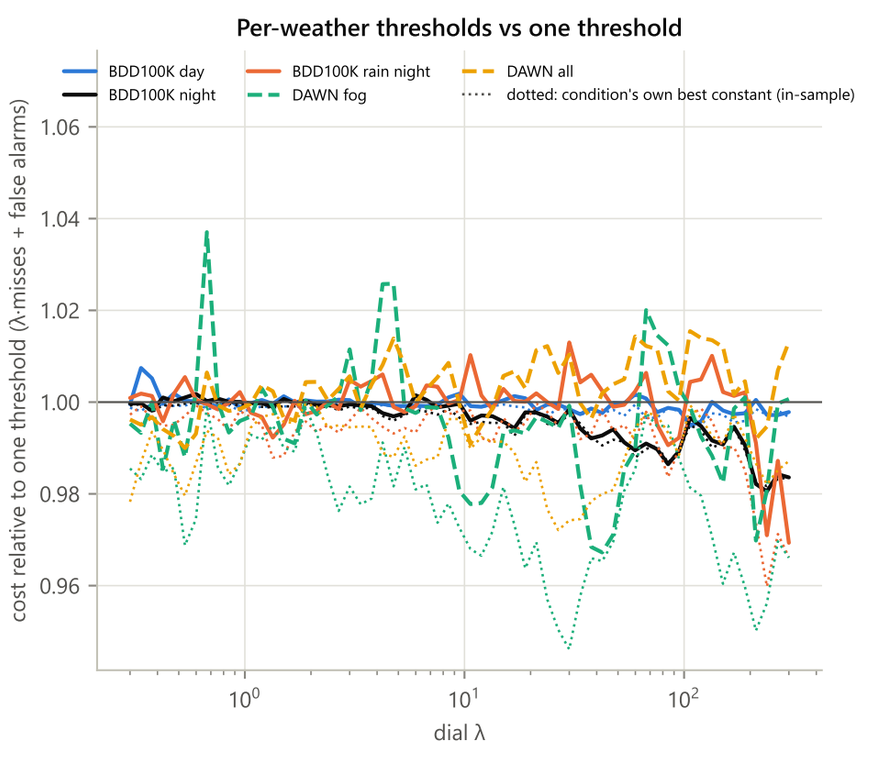
Per-weather thresholds vs one threshold
BDD100K day
BDD100K night
BDD100K rain night
DAWN fog
DAWN all
dotted: condition's own best constant (in-sample)
cost relative to one threshold (λ·misses + false alarms)
1.06
1.04
1.02
1.00
0.98
0.96
10^{0}
10^{1}
10^{2}
dial λ