
STM32
CubeMX

1. Description

1.1. Project

Project Name	STM32F439ZIT6U Waveform Generator
Board Name	custom
Generated with:	STM32CubeMX 6.1.1
Date	03/15/2021

1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F429/439
MCU name	STM32F439ZITx
MCU Package	LQFP144
MCU Pin number	144

1.3. Core(s) information

Core(s)	Arm Cortex-M4

2. Pinout Configuration

3. Pins Configuration

Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
6	VBAT	Power		
16	VSS	Power		
17	VDD	Power		
23	PH0/OSC_IN	I/O	RCC_OSC_IN	
24	PH1/OSC_OUT	I/O	RCC_OSC_OUT	
25	NRST	Reset		
30	VDD	Power		
31	VSSA	Power		
32	VREF+	Power		
33	VDDA	Power		
34	PA0/WKUP	I/O	ADC1_IN0	
35	PA1	I/O	ADC2_IN1	
36	PA2	I/O	USART2_TX	
37	PA3	I/O	USART2_RX	
38	VSS	Power		
39	VDD	Power		
40	PA4	I/O	DAC_OUT1	
41	PA5	I/O	DAC_OUT2	
51	VSS	Power		
52	VDD	Power		
61	VSS	Power		
62	VDD	Power		
71	VCAP_1	Power		
72	VDD	Power		
83	VSS	Power		
84	VDD	Power		
94	VSS	Power		
95	VDD	Power		
101	PA9	I/O	USART1_TX	
102	PA10	I/O	USART1_RX	
103	PA11	I/O	USB_OTG_FS_DM	
104	PA12	I/O	USB_OTG_FS_DP	
105	PA13	I/O	SYS_JTMS-SWDIO	
106	VCAP_2	Power		
107	VSS	Power		
108	VDD	Power		

Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
109	PA14	I/O	SYS_JTCK-SWCLK	
120	VSS	Power		
121	VDD	Power		
130	VSS	Power		
131	VDD	Power		
133	PB3	I/O	SYS_JTDO-SWO	
136	PB6	I/O	I2C1_SCL	
137	PB7	I/O	I2C1_SDA	
138	BOOT0	Boot		
143	PDR_ON	Reset		
144	VDD	Power		

4. Clock Tree Configuration

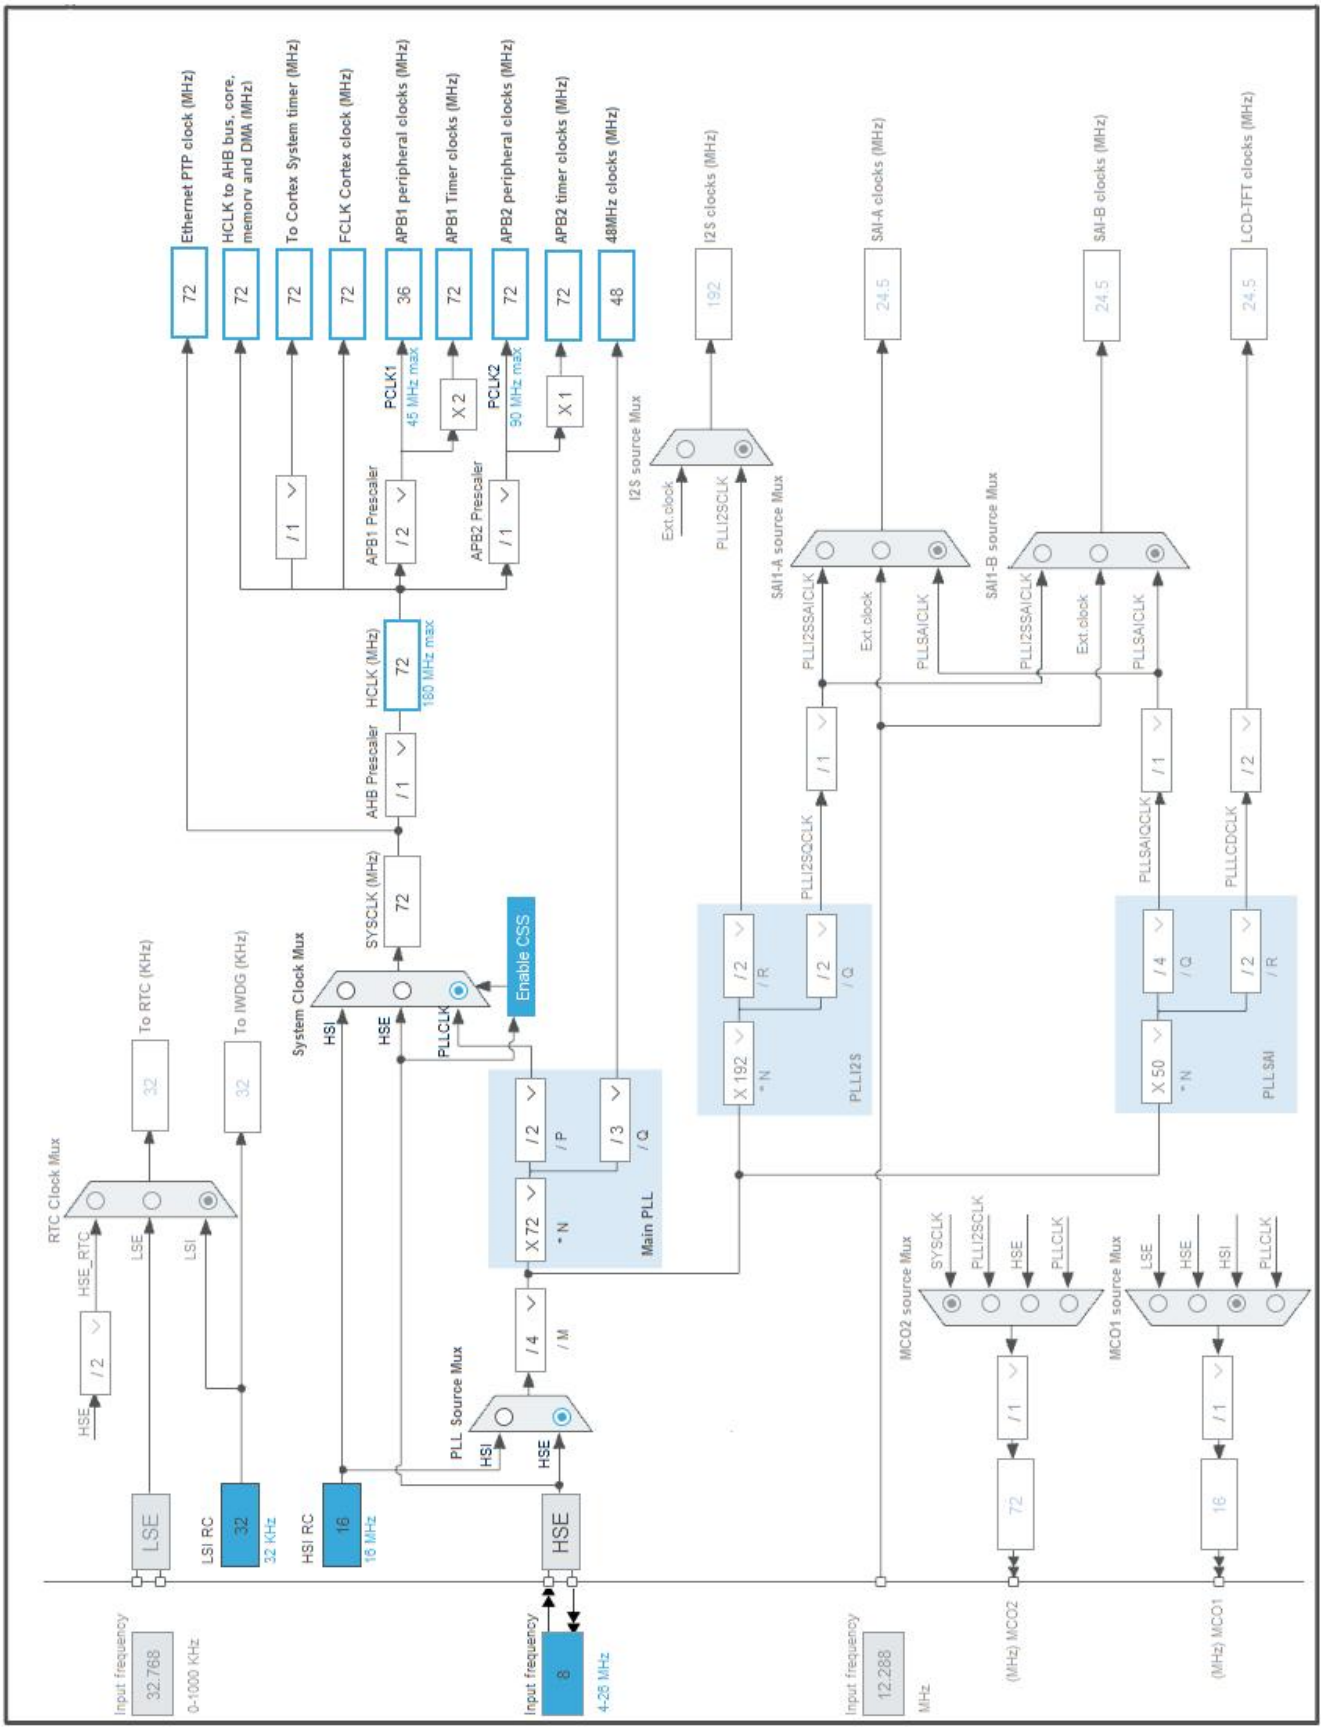

5. Software Project

5.1. Project Settings

Name	Value
Project Name	STM32F439ZIT6U Waveform Generator
Project Folder	C:\Users\Nanodyn - Spare\OneDrive - Nanodyn\Desktop\GIT
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_F4 V1.25.2
Application Structure	Advanced
Generate Under Root	Yes
Do not generate the main()	No
Minimum Heap Size	0x200
Minimum Stack Size	0x400

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No
Enable Full Assert	No

5.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name
1	MX_GPIO_Init	GPIO
2	MX_DMA_Init	DMA
3	SystemClock_Config	RCC
4	MX_DAC_Init	DAC
5	MX_TIM2_Init	TIM2
6	MX_TIM4_Init	TIM4
7	MX_USB_DEVICE_Init	USB_DEVICE
8	MX_ADC1_Init	ADC1
9	MX_ADC2_Init	ADC2
10	MX_I2C1_Init	I2C1
11	MX_USART1_UART_Init	USART1

Rank	Function Name	Peripheral Instance Name
12	MX_USART2_UART_Init	USART2

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32F4
Line	STM32F429/439
MCU	STM32F439ZITx
Datasheet	DS9484_Rev10

6.2. Parameter Selection

Temperature	25
Vdd	3.3

6.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1

6.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP_UDM (Under Drive)
Vdd	3.3	3.3
Voltage Source	Battery	Battery
Range	Scale1-High	No Scale
Fetch Type	FLASH	n/a
CPU Frequency	180 MHz	0 Hz
Clock Configuration	HSE PLL	Regulator_LP Flash-PwrDwn
Clock Source Frequency	4 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	57 mA	100 µA
Duration	0.1 ms	0.9 ms
DMIPS	225.0	0.0
Ta Max	97.48	104.99
Category	In DS Table	In DS Table

6.5. Results

Sequence Time	1 ms	Average Current	5.79 mA
Battery Life	24 days, 10 hours	Average DMIPS	225.0 DMIPS

6.6. Chart

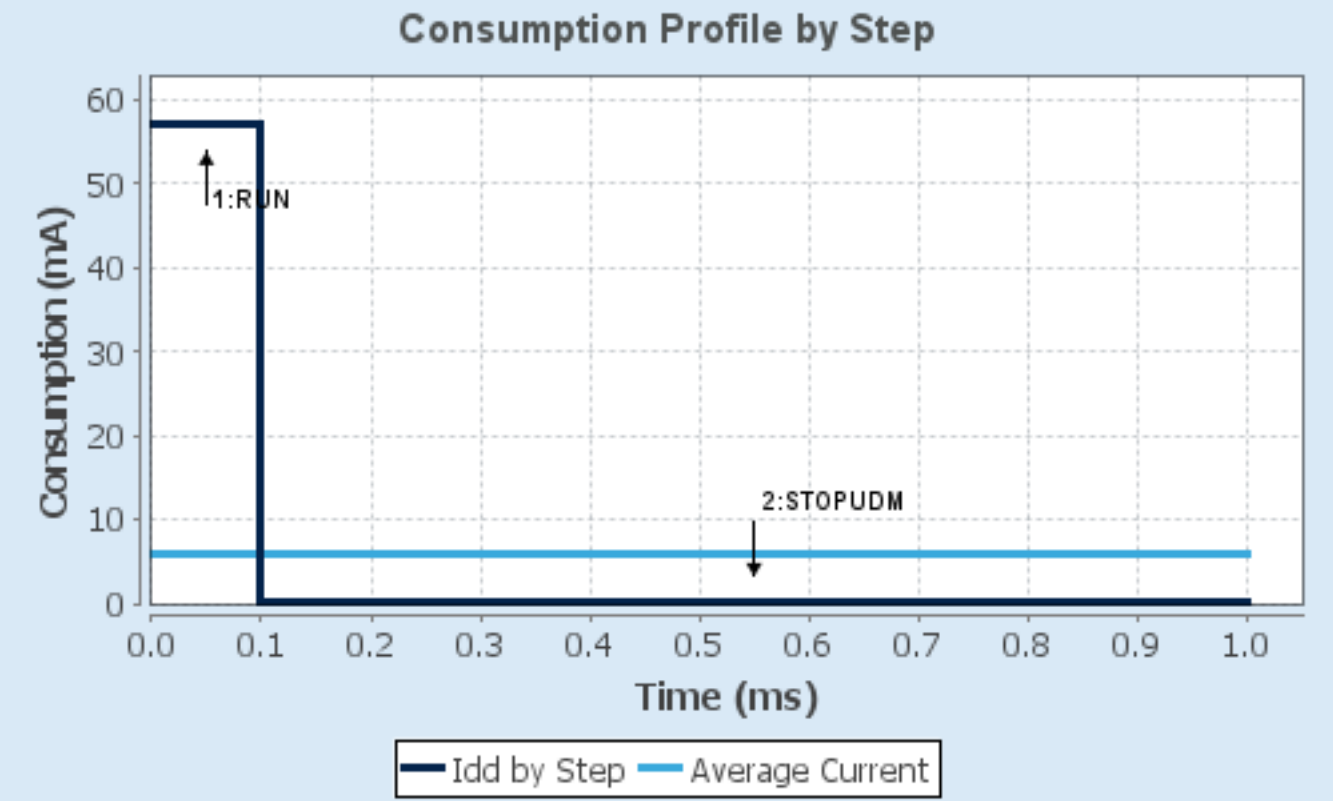
Consumption Profile by Step
Consumption (mA)
60
50
40
30
20
10
0
1:RUN
2:STOPUDM
0.0
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
0.9
1.0
Time (ms)
Idd by Step
Average Current

7. Peripherals and Middlewares Configuration

7.1. ADC1

mode: IN0

7.1.1. Parameter Settings:

ADCs_Common_Settings:

Mode	Independent mode

ADC_Settings:

Clock Prescaler	PCLK2 divided by 2
Resolution	12 bits (15 ADC Clock cycles)
Data Alignment	Right alignment
Scan Conversion Mode	Disabled
Continuous Conversion Mode	Disabled
Discontinuous Conversion Mode	Disabled
DMA Continuous Requests	Disabled
End Of Conversion Selection	EOC flag at the end of single channel conversion

ADC_Regular_ConversionMode:

Number Of Conversion	1
External Trigger Conversion Source	Regular Conversion launched by software
External Trigger Conversion Edge	None
Rank	1
Channel	Channel 0
Sampling Time	3 Cycles

ADC_Injected_ConversionMode:

Number Of Conversions	0

WatchDog:

Enable Analog WatchDog Mode	false

7.2. ADC2

mode: IN1

7.2.1. Parameter Settings:

ADCs_Common_Settings:

Mode	Independent mode

ADC_Settings:

Clock Prescaler	PCLK2 divided by 2
Resolution	12 bits (15 ADC Clock cycles)
Data Alignment	Right alignment

Scan Conversion Mode	Disabled
Continuous Conversion Mode	Disabled
Discontinuous Conversion Mode	Disabled
DMA Continuous Requests	Disabled
End Of Conversion Selection	EOC flag at the end of single channel conversion

ADC_Regular_ConversionMode:

Number Of Conversion	1
External Trigger Conversion Source	Regular Conversion launched by software
External Trigger Conversion Edge	None
Rank	1
Channel	Channel 1
Sampling Time	3 Cycles

ADC_Injected_ConversionMode:

Number Of Conversions	0

WatchDog:

Enable Analog WatchDog Mode	false

7.3. DAC

mode: OUT1 Configuration

mode: OUT2 Configuration

7.3.1. Parameter Settings:

DAC Out1 Settings:

Output Buffer	Enable
Trigger	**Timer 2 Trigger Out event ***
Wave generation mode	Disabled

DAC Out2 Settings:

Output Buffer	Enable
Trigger	**Timer 4 Trigger Out event ***
Wave generation mode	Disabled

7.4. I2C1

I2C: I2C

7.4.1. Parameter Settings:

Master Features:

I2C Speed Mode	Standard Mode

I2C Clock Speed (Hz)	100000

Timing configuration:

Coefficient of Digital Filter	0
Analog Filter	Enabled

Slave Features:

Clock No Stretch Mode	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0
General Call address detection	Disabled

7.5. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

7.5.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	2 WS (3 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
TIM Prescaler Selection	Disabled
HSE Startup Timout Value (ms)	100
LSE Startup Timout Value (ms)	5000

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 3
Power Over Drive	Disabled

7.6. SYS

Debug: Trace Asynchronous Sw

Timebase Source: SysTick

7.7. TIM2

Clock Source : Internal Clock

7.7.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	**1 ***
Counter Mode	Up
Counter Period (AutoReload Register - 32 bits value)	**1 ***
Internal Clock Division (CKD)	No Division
auto-reload preload	**Enable ***

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	**Update Event ***

7.8. TIM4

Clock Source : Internal Clock

7.8.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	**1 ***
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	**1 ***
Internal Clock Division (CKD)	No Division
auto-reload preload	**Enable ***

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	**Update Event ***

7.9. USART1

Mode: Asynchronous

7.9.1. Parameter Settings:

Basic Parameters:

Baud Rate	**9600 ***
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

7.10. USART2

Mode: Asynchronous

7.10.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	**2 ***

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

7.11. USB_OTG_FS

Mode: Device_Only

7.11.1. Parameter Settings:

Speed	Device Full Speed 12MBit/s
Low power	Disabled
Link Power Management	Disabled
VBUS sensing	Disabled
Signal start of frame	Disabled

7.12. USB_DEVICE

Class For FS IP: Communication Device Class (Virtual Port Com)

7.12.1. Parameter Settings:

Basic Parameters:

USBD_MAX_NUM_INTERFACES (Maximum number of supported interfaces)	1
USBD_MAX_NUM_CONFIGURATION (Maximum number of supported configuration)	1
USBD_MAX_STR_DESC_SIZ (Maximum size for the string descriptors)	512

USBD_SELF_POWERED (Enabled self power)	Enabled
USBD_DEBUG_LEVEL (USBD Debug Level)	0: No debug message

Class Parameters:

USB CDC Rx Buffer Size	2048
USB CDC Tx Buffer Size	2048

7.12.2. Device Descriptor:

Device Descriptor:

VID (Vendor IDentifier)	1155
LANGID_STRING (Language Identifier)	English(United States)
MANUFACTURER_STRING (Manufacturer Identifier)	STMicroelectronics

Device Descriptor FS:

PID (Product IDentifier)	22336
PRODUCT_STRING (Product Identifier)	STM32 Virtual ComPort
CONFIGURATION_STRING (Configuration Identifier)	CDC Config
INTERFACE_STRING (Interface Identifier)	CDC Interface

*** User modified value**

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
ADC1	PA0/WKUP	ADC1_IN0	Analog mode	No pull-up and no pull-down	n/a	
ADC2	PA1	ADC2_IN1	Analog mode	No pull-up and no pull-down	n/a	
DAC	PA4	DAC_OUT1	Analog mode	No pull-up and no pull-down	n/a	
	PA5	DAC_OUT2	Analog mode	No pull-up and no pull-down	n/a	
I2C1	PB6	I2C1_SCL	Alternate Function Open Drain	Pull-up	**Very High ***	
	PB7	I2C1_SDA	Alternate Function Open Drain	Pull-up	**Very High ***	
RCC	PH0/OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1/OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
	PB3	SYS_JTDO-SWO	n/a	n/a	n/a	
USART1	PA9	USART1_TX	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
	PA10	USART1_RX	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
USART2	PA2	USART2_TX	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
	PA3	USART2_RX	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
USB_OTG_FS	PA11	USB_OTG_FS_DM	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
	PA12	USB_OTG_FS_DP	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	

8.2. DMA configuration

DMA request	Stream	Direction	Priority
DAC1	DMA1_Stream5	Memory To Peripheral	Low
DAC2	DMA1_Stream6	Memory To Peripheral	Low
USART1_RX	DMA2_Stream2	Peripheral To Memory	Low
USART1_TX	DMA2_Stream7	Memory To Peripheral	Low

DAC1: DMA1_Stream5 DMA request Settings:

Mode:	**Circular ***
Use fifo:	Disable
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	**Word ***
Memory Data Width:	**Word ***

DAC2: DMA1_Stream6 DMA request Settings:

Mode:	**Circular ***
Use fifo:	Disable
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	**Word ***
Memory Data Width:	**Word ***

USART1_RX: DMA2_Stream2 DMA request Settings:

Mode:	Normal
Use fifo:	Disable
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	Byte
Memory Data Width:	Byte

USART1_TX: DMA2_Stream7 DMA request Settings:

Mode:	Normal

Use fifo:	Disable
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	Byte
Memory Data Width:	Byte

8.3. NVIC configuration

8.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
DMA1 stream5 global interrupt	true	0	0
DMA1 stream6 global interrupt	true	0	0
USART1 global interrupt	true	0	0
USART2 global interrupt	true	0	0
DMA2 stream2 global interrupt	true	0	0
USB On The Go FS global interrupt	true	0	0
DMA2 stream7 global interrupt	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
ADC1, ADC2 and ADC3 global interrupts	unused		
TIM2 global interrupt	unused		
TIM4 global interrupt	unused		
I2C1 event interrupt	unused		
I2C1 error interrupt	unused		
TIM6 global interrupt, DAC1 and DAC2 underrun error interrupts	unused		
FPU global interrupt	unused		

8.3.2. NVIC Code generation

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false
Memory management fault	false	true	false
Pre-fetch fault, memory access fault	false	true	false
Undefined instruction or illegal state	false	true	false
System service call via SWI instruction	false	true	false

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Debug monitor	false	true	false
Pendable request for system service	false	true	false
System tick timer	false	true	true
DMA1 stream5 global interrupt	false	true	true
DMA1 stream6 global interrupt	false	true	true
USART1 global interrupt	false	true	true
USART2 global interrupt	false	true	true
DMA2 stream2 global interrupt	false	true	true
USB On The Go FS global interrupt	false	true	true
DMA2 stream7 global interrupt	false	true	true

*** User modified value**

9. System Views

9.1. Category view

9.1.1. Current

10. Docs & Resources

Type	Link
Datasheet	http://www.st.com/resource/en/datasheet/DM00077036.pdf
Reference manual	http://www.st.com/resource/en/reference_manual/DM00031020.pdf
Programming manual	http://www.st.com/resource/en/programming_manual/DM00046982.pdf
Errata sheet	http://www.st.com/resource/en/errata_sheet/DM00068628.pdf
Application note	http://www.st.com/resource/en/application_note/CD00167594.pdf
Application note	http://www.st.com/resource/en/application_note/CD00211314.pdf
Application note	http://www.st.com/resource/en/application_note/CD00249778.pdf
Application note	http://www.st.com/resource/en/application_note/CD00259245.pdf
Application note	http://www.st.com/resource/en/application_note/CD00264321.pdf
Application note	http://www.st.com/resource/en/application_note/CD00264342.pdf
Application note	http://www.st.com/resource/en/application_note/CD00264379.pdf
Application note	http://www.st.com/resource/en/application_note/DM00024853.pdf
Application note	http://www.st.com/resource/en/application_note/DM00040802.pdf
Application note	http://www.st.com/resource/en/application_note/DM00040808.pdf
Application note	http://www.st.com/resource/en/application_note/DM00042534.pdf
Application note	http://www.st.com/resource/en/application_note/DM00046011.pdf
Application note	http://www.st.com/resource/en/application_note/DM00050879.pdf
Application note	http://www.st.com/resource/en/application_note/DM00072315.pdf
Application note	http://www.st.com/resource/en/application_note/DM00073742.pdf
Application note	http://www.st.com/resource/en/application_note/DM00073853.pdf
Application note	http://www.st.com/resource/en/application_note/DM00080497.pdf
Application note	http://www.st.com/resource/en/application_note/DM00081379.pdf
Application note	http://www.st.com/resource/en/application_note/DM00115714.pdf
Application note	http://www.st.com/resource/en/application_note/DM00123028.pdf
Application note	http://www.st.com/resource/en/application_note/DM00129215.pdf

Application note	http://www.st.com/resource/en/application_note/DM00154959.pdf
Application note	http://www.st.com/resource/en/application_note/DM00160482.pdf
Application note	http://www.st.com/resource/en/application_note/DM00161778.pdf
Application note	http://www.st.com/resource/en/application_note/DM00164538.pdf
Application note	http://www.st.com/resource/en/application_note/DM00172465.pdf
Application note	http://www.st.com/resource/en/application_note/DM00213525.pdf
Application note	http://www.st.com/resource/en/application_note/DM00220769.pdf
Application note	http://www.st.com/resource/en/application_note/DM00257177.pdf
Application note	http://www.st.com/resource/en/application_note/DM00272912.pdf
Application note	http://www.st.com/resource/en/application_note/DM00226326.pdf
Application note	http://www.st.com/resource/en/application_note/DM00236305.pdf
Application note	http://www.st.com/resource/en/application_note/DM00281138.pdf
Application note	http://www.st.com/resource/en/application_note/DM00296349.pdf
Application note	http://www.st.com/resource/en/application_note/DM00327191.pdf
Application note	http://www.st.com/resource/en/application_note/DM00287603.pdf
Application note	http://www.st.com/resource/en/application_note/DM00354244.pdf
Application note	http://www.st.com/resource/en/application_note/DM00373474.pdf
Application note	http://www.st.com/resource/en/application_note/DM00315319.pdf
Application note	http://www.st.com/resource/en/application_note/DM00380469.pdf
Application note	http://www.st.com/resource/en/application_note/DM00395696.pdf
Application note	http://www.st.com/resource/en/application_note/DM00431633.pdf
Application note	http://www.st.com/resource/en/application_note/DM00493651.pdf
Application note	http://www.st.com/resource/en/application_note/DM00536349.pdf
Application note	http://www.st.com/resource/en/application_note/DM00725181.pdf