

Template for Security-of-Wireless-Networks Reports

Vasileios Dimitrakis and Niclas Scheuing

November 12, 2015



Figure 1: Cantenna

1 Introduction

The objective of this exercise is the creation and the performance evaluation of a high gain and directional Wi-Fi antenna. The effectiveness of the antenna will be evaluated in comparison with an omnidirectional and a professional Wi-Fi antenna. The design that we chose to build is a cantenna. Cantenna is a homemade directional waveguide antenna, made out of an open-ended metal can.

2 Theoretical background of the cantenna

The cantenna, as it was described in the introduction, is a directional waveguide antenna and in our case, it is also a cylindrical cantenna. This kind of waveguide supports both traverse electric (TE) and traverse magnetic (TM) modes. The traverse modes are a particular electromagnetic field pattern of radiation measured in a plane perpendicular (i.e., transverse) to the propagation direction of the beam. They have a cutoff frequency, below which electromagnetic energy is severely attenuated and above this, the certain mode is excited. An ideal cantenna has only one mode, the dominant one, which is the TE₁₁, because our cantenna is a cylindrical waveguide. If the cantenna excites more than one modes, this phenomenon will decrease the effectiveness of the antenna, because the energy of the electromagnetic wave will be spread within different modes. The mode that we do not want to trigger is the TM₁₀. In the following, Figure 1 presents a cantenna setup.

2.1 Cantenna design parameters

2.1.1 Can diameter

As we described in the introductory part of the cantenna theory, the cantenna has to trigger only the dominant mode TE₁₁, which has the lowest cutoff frequency. For frequencies lower than the previous one, no mode is triggered, because waves are attenuated exponentially. The second mode is the TM₁₀ and if the frequency is greater than the one of TM₁₀, both the two first modes will be excited. Considering all the above, we deduce that the Wi-Fi frequency f_{Wi-Fi} has to fulfill the following inequality:

$$f_{TE_{11}} < f_{Wi-Fi} < f_{TM_{10}} \quad (1)$$

. According to the citation[1], the formulas for the above two frequencies for the cylindrical waveguide are the following:

$$\frac{p_{11}c}{\pi f_{WiFi}} < D < \frac{p'_{01}c}{\pi f_{WiFi}} \quad (2)$$

where $p_{11} = 1.841$ and $p'_{01} = 3.832$ are parameters related to the Bessel function, c the speed of light. Therefore, according to these theoretical values, the diameter of our cantenna has to be between these limits. Although these are the theoretical values of the diameter, in real cases, it has to be approximately between 8-11cm, so that the antenna will be effective.

2.1.2 Position of the copper element: Acts as the monopole

The electromagnetic wave of the Wi-Fi signal is transmitted through the air and reaches the opening of our cantenna. Inside the can and according to the frequency of the wave, one or more modes are excited. Moreover, the wave inside the can is reflected to the bottom and this results in the creation of a static wave. The wavelength λ_g of the wave in the internal of the can is equal to the wavelength of the mode that is triggered. In our case we want to trigger only the dominant mode $f_{TE_{11}}$. Moreover, we have to take into consideration the creation of the static wave and decide which is the best position of the monopole, so that the effectiveness of our antenna will be the highest. It is known from the wave theory, that the peak of a static wave is presented in distance $\frac{\lambda_g}{4}$ from the can bottom. Taking into consideration this wave property, we opened a hole on the can 4.1cm from the can bottom.

2.1.3 Monopole length

As we described in subsection 2.1.2, the monopole is placed $\frac{1}{2} \times g$ from the bottom of the can and its orientation is vertical to the internal side of the can. The monopole antenna is a class of radio antenna consisting of a straight rod-shaped conductor, often mounted perpendicularly over some type of conductive surface, called a plane ground. In our case, we decided to built the most common type of the monopole, which is the quarter-wave monopole. It is also called Marconi antenna from the name of its inventor. This monopole is ideal for our configuration, because it is simple and it has the right dimensions, in order to fit inside the cantenna. The length of the monopole, as we said before, is equal to $\frac{1}{4} \times \text{Wi-Fi}$. The Wi-Fi is the wavelength of the signal transmitted in the free space. In the current setup, the wavelength is equal to 12.3cm, so the length of the monopole is approximately 3.1cm.

	Theoretical value in mm	Actual Values in mm
<i>Can diameter</i>	0	100.5
<i>Monopole position</i>	0	44.1
<i>Monopole length</i>	0	30.75
<i>Length of the can</i>	0	162.5

2.1.4 Length of the can

The length of the can has to be more than $\frac{3}{4} \times g$. The longer the cantenna is the more directional and effective becomes. In our case, the length of the cantenna is 16cm, so we expect to be directional and effective.

2.2 Cantenna theoretical and experimental device dimensions

In Table 1, we present the theoretical design parameters of the cantenna and the actual ones of our setup. It is clear from the table that our cantenna satisfies all the design prerequisites and thus, we expect to receive very good results, as far as the antenna gain and the directivity are concerned.

3 Setup

3.1 Terminology

The machine serving as stationary receiver connected to the cantenna is denoted by *Receiver*. It is the one performing all measurements. The machine used as access point is called *AP*. It is moved around and sending traffic to the *Receiver*.

3.2 Materials

The materials and the equipment that were used for the creation and the setup of the antenna are the following:

- 1 *USB Alfa wireless adapter*: Is the wireless adapter connected to *Receiver*. The antennas are connected to this interface.
- 1 *TP-Link wireless adapter*: Is used by the *AP*.
- 1 *Pigtail cable*: Is used to connect the cantenna with the USB Alfa wireless adapter.



Figure 2: title

- 1 *female N-connector*
- 1 *piece of copper wire*: Is used as the active element, the monopole, that radiates the waves
- 1 *cylindrical can*: Plays the role of the Wi-fi antenna.

The cantenna used in this exercise will use the Wi-Fi channel 6 with central frequency 2.437GHz and wavelength 12.31cm.

4 Results

This section is divided in two different subsections: The one is the Gain measurements and the other is the Directionality measurements.

4.1 Gain measurements

In this phase of our experiment, we will compare the way that the signal strength changes increasing the distance of the AP and the antenna under test (client). This experiment will be executed for three different antennas:



Figure 3: title



Figure 4: title

an omnidirectional antenna, a professional cantenna and our cantenna. In order to be the measurements accurate, they have to be taken in an open area field. For this reason, we chose the place, that is depicted in the following pictures, in order to avoid environmental effects, such as reflections by buildings, scattering by moving objects.

4.2 Directionality measurements

The second phase of the experiment evaluates the directionality of each of the above antennas. All the measurements for the three antennas will be taken in 20m distance from the Access Point. The starting point of the measurements will be considered the one with $^{\circ}$. Every next measurement will be taken every 20° .



Figure 5: title

4.3 Maximum distance measurements

5 Analysis

6 References

References

- [1] RF Cafe. Rectangular & circular waveguide: Equations, fields, & fco calculator. <http://www.rfcafe.com/references/electrical/waveguide.htm>, 2015.

7 Appendix

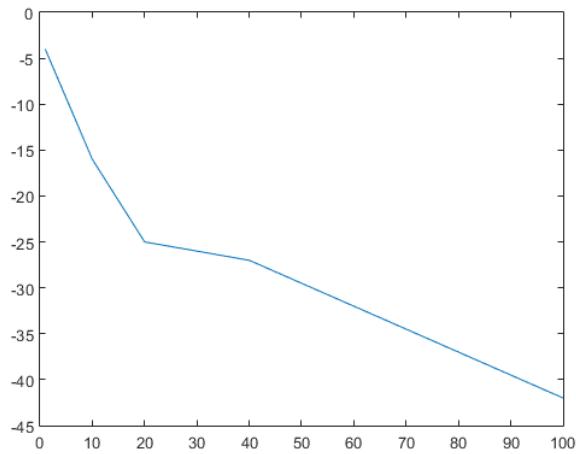


Figure 6: Our cantenna. Measured signal strength depending on the distance

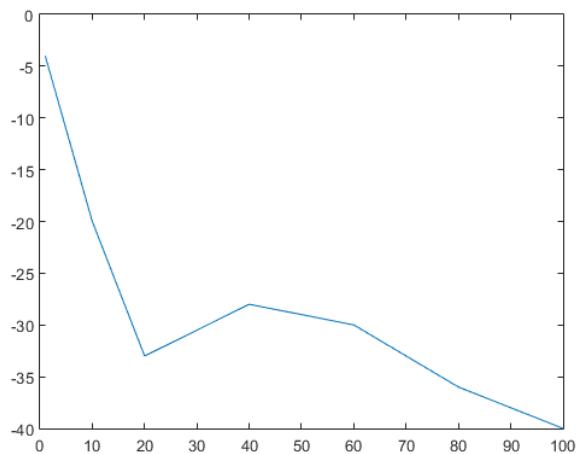


Figure 7: Professional cantenna. Measured signal strength depending on the distance

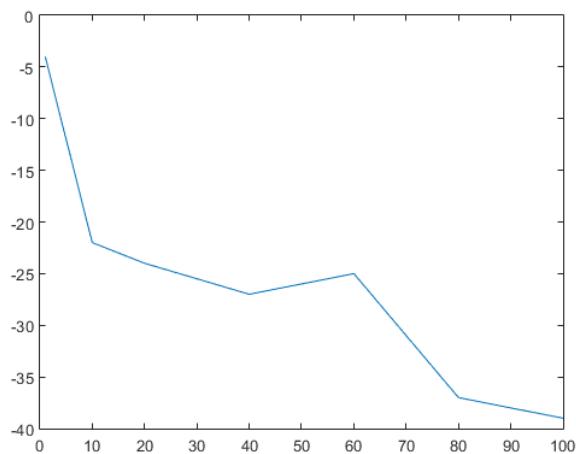


Figure 8: Omni-directional cantenna. Measured signal strength depending on the distance

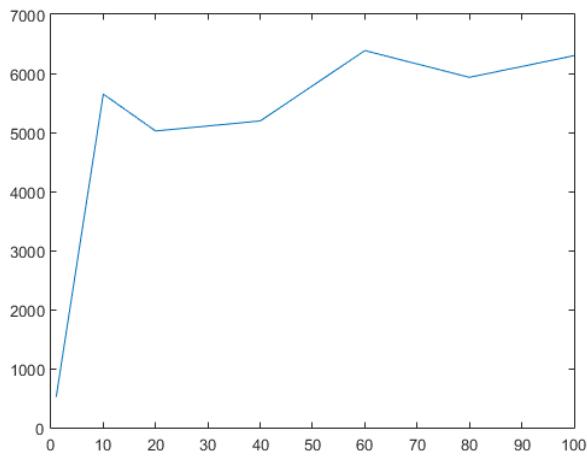


Figure 9: Our cantenna. Measured bandwidth depending on the distance

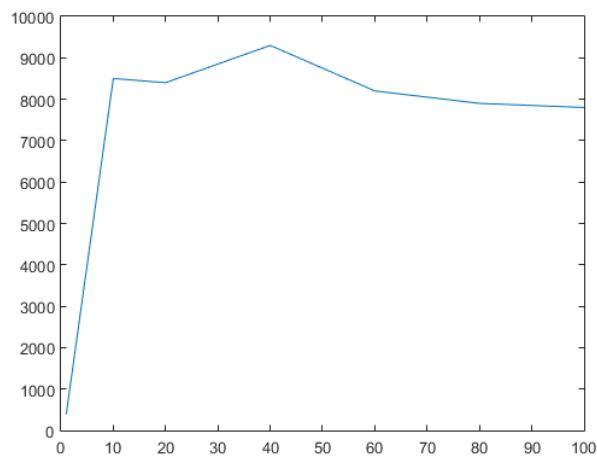


Figure 10: Professional cantenna. Measured bandwidth depending on the distance

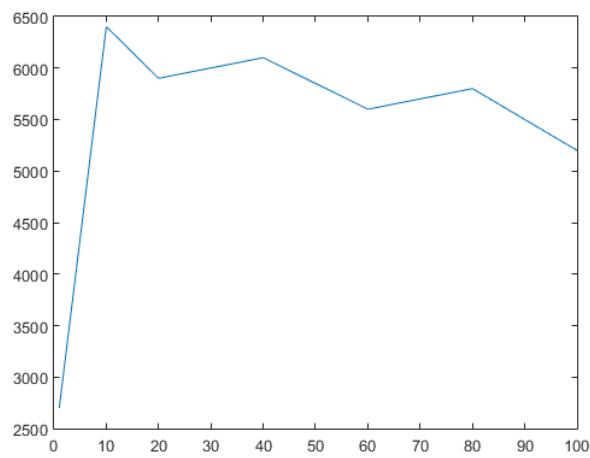


Figure 11: Omni-directional cantenna. Measured bandwidth depending on the distance

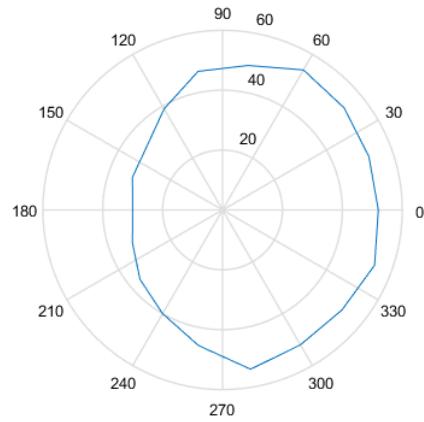


Figure 12: Our cantenna. Measured signal strength depending on the angle

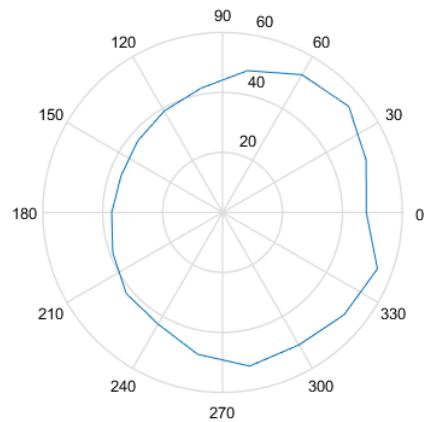


Figure 13: Professional cantenna. Measured signal strength depending on the angle

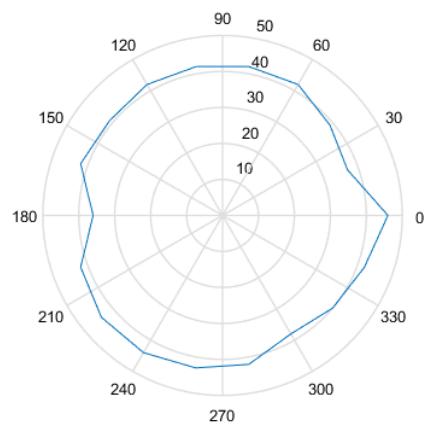


Figure 14: Omni-directional cantenna. Measured signal strength depending on the angle

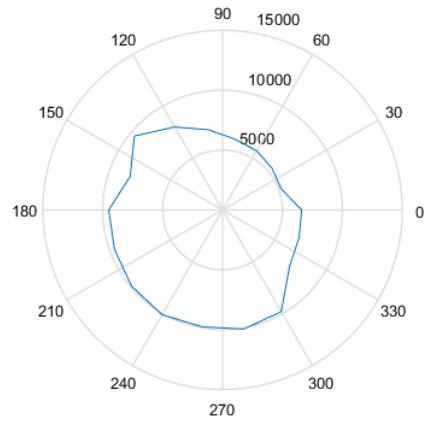


Figure 15: Our cantenna. Measured bandwidth depending on the angle

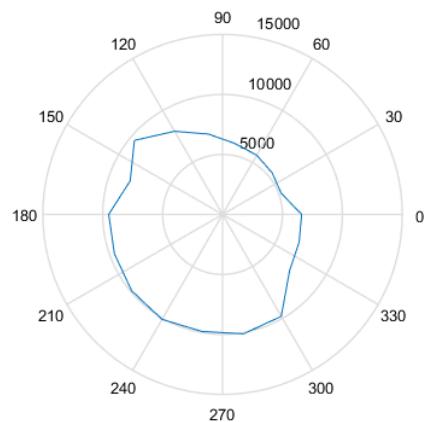


Figure 16: Professional cantenna. Measured bandwidth depending on the angle

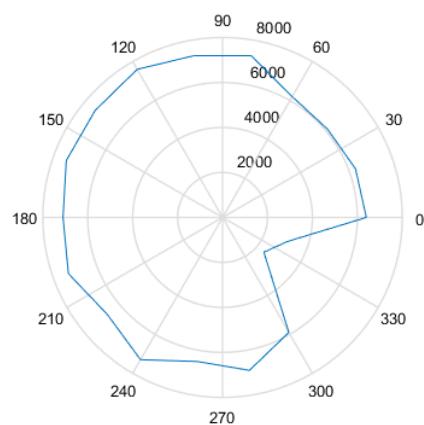


Figure 17: Omni-directional cantenna. Measured bandwidth depending on the angle

Distance in <i>m</i>	signal strength in <i>dBm</i>	transfer rate in <i>Kib/s</i>
1	-4	520
10	-16	5649
20	-25	5024
40	-27	5194
60	-32	6386
80	-37	5933
100	-42	6300

Table 1: Our cantenna. Measured signal strength and bandwidth depending on the distance

Distance in <i>m</i>	signal strength in <i>dBm</i>	transfer rate in <i>Kib/s</i>
1	-4	389
10	-20	8500
20	-33	8400
40	-28	9300
60	-30	8200
80	-36	7900
100	-40	7800

Table 2: Professional cantenna. Measured signal strength and bandwidth depending on the distance

Distance in <i>m</i>	signal strength in <i>dBm</i>	transfer rate in <i>Kib/s</i>
1	-4	2700
10	-22	6400
20	-24	5900
40	-27	6100
60	-25	5600
80	-37	5800
100	-39	5200

Table 3: Omni-directional antenna. Measured signal strength and bandwidth depending on the distance

Angle in degrees m	signal strength in dBm	transfer rate in Kib/s
0	-30	6600
20	-32	5200
40	-36	5400
60	-40	5700
80	-46	6000
100	-54	6800
120	-52	8000
140	-52	9600
160	-54	8200
180	-52	9500
200	-52	9600
220	-53	9900
240	-54	10100
260	-49	9900
280	-47	10100
300	-39	9800
320	-33	7300
340	-32	6800

Table 4: Our cantenna. Measured signal strength and bandwidth depending on the angle

Angle in degrees m	signal strength in dBm	transfer rate in Kib/s
0	-37	7900
20	-39	7100
40	-42	7200
60	-43	7300
80	-48	8200
100	-52	9300
120	-51	9900
140	-53	9600
160	-55	9400
180	-48	10300
200	-51	10300
220	-55	9200
240	-53	9800
260	-48	10300
280	-42	10300
300	-39	10300
320	-37	7900
340	-36	7700

Table 5: Professional cantenna. Measured signal strength and bandwidth depending on the angle

Angle in degrees m	signal strength in dBm	transfer rate in Kib/s
0	-36	6400
20	-42	6300
40	-44	6100
60	-44	6200
80	-43	7300
100	-42	7300
120	-38	7600
140	-40	7400
160	-42	7400
180	-46	7100
200	-37	7300
220	-39	6700
240	-42	7300
260	-42	6500
280	-42	6900
300	-42	5900
320	-41	2400
340	-42	3100

Table 6: Omni-directional antenna. Measured signal strength and bandwidth depending on the angle