




KRIA™ SOM PRODUCT SELECTION GUIDE


AMD Kria™ SOM Products Overview

SOM-based Development Kits

Kria™ KV260
Vision AI Starter Kit

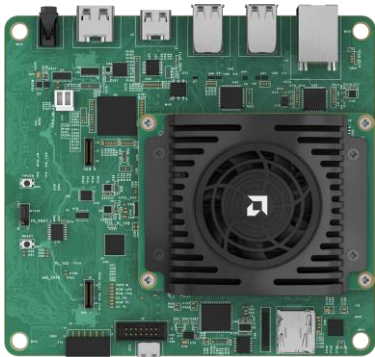

Kria KR260
Robotics Starter Kit

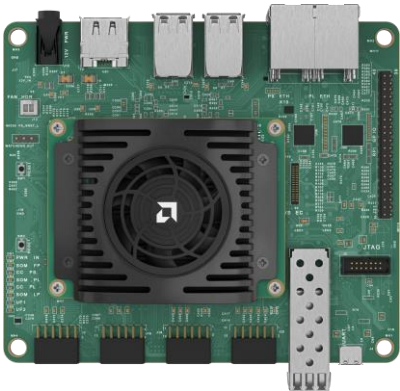

Kria KD240
Drives Starter Kit



SK-KV260-G

For vision and smart city applications
with latest AI models

SK-KR260-G

For industrial systems including
ROS2-based robotics applications


SK-KD240-G

For deterministic motor control
and DSP applications

Production Modules

Fully Qualified & Certified


Kria K24 SOM



SM-K24-XCL2GC/I

Cost-optimized SOM for lower power,
smaller form-factor & cost sensitive
applications

Kria K26 SOM

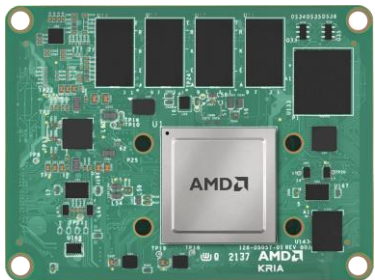

SM-K26-XCL2GC/I

Mid-range SOM for vision AI and robotics
applications requiring higher
performance per watt

- Connector compatible between SOMs
- Offered in C-Grade and I-Grade

Kria™ SOM Product Table

Area	Parameter	K24	K26
Silicon Device	Zynq™ UltraScale+™ MPSoC	XCK24 (A530 InFO package, custom and optimized device for motor control and DSP apps)	XCK26 (D784 package, custom and optimized device for vision AI and robotics apps)
SOM to Carrier Connectors	Samtec Connector	1x 240-pin, 1x 40-pin	2x 240-pin
Form Factor	Dimensions (with heat spreader)	60 x 42 x 11 mm	77 x 60 x 11 mm
Processor Unit & Acceleration	Application Processor	Quad-core Arm® Cortex®-A53 MPCore™ at 1.33 GHz	
	Real-Time Processor	Dual-core Arm Cortex-R5F MPCore at 553 MHz	
	Graphics Processing Unit	Mali™-400 MP2 at 600 MHz	
	Deep Learning Processor Unit (DPU)	INT8 (852 GOPs with B2304 DPU)	Up to 1.4 TOPS with B4096 at 300 MHz
	Trusted Platform Module (TPM)	Infineon 2.0	
Memory	On-Chip ⁽¹⁾	9.4 Mb On-Chip SRAM	26.6 Mb On-Chip SRAM
	On-SOM	2 GB 32-bit LPDDR4 @ 1066 Mb/s w/ ECC configuration and 32 GB eMMC	4 GB 64-bit DDR4 (non-ECC) and 16 GB eMMC
Connectivity	High-Speed PS Connectivity (GTR)	PCIe® Gen2 x4, 2x USB3.0, SATA 3.1, DisplayPort™, 4x Tri-mode Gigabit Ethernet	
	General PS Connectivity (MIO)	2x USB 2.0, 2x SD/SDIO, 2x UART, 2x CAN 2.0B, 2x I2C, 2x SPI, 4x 32b GPIO	
Transceivers	GTH 12.5 Gb/s Transceivers ⁽⁴⁾	-	4 (PCIe Gen3 x4, SLVS-EC, HDMI 2.0, DisplayPort 1.4) ⁽²⁾
	GTR 6 Gb/s Transceivers	4	4
I/O Count	PS MIO (1.8V)	49	52
	PL High-Density I/O (HDIO) (3.3V)	23	69
	PL High-Performance I/O (HPIO) (1.8V)	56	116
Programmable Logic	System Logic Cells (K)	154	256
	DSP Slices	360	1,248
Integrated IP	Video Codec Unit (VCU) H.265/H.264	-	1x up to 32 streams (total resolution ≤ 4Kp60)
	PCI Express Gen 3x16	-	2x Gen3x8 ⁽⁵⁾
Power & Thermal	Typical Power	2.5W ⁽³⁾	7.5W
	Maximum Power ⁽²⁾	7.5W ⁽³⁾	15W
	Thermal Interface	Passive (Clam shell thermal plates)	Passive (Heat spreader)
Speed and Temperature Grades	Commercial	-2 speed grade, low voltage and 0 to 85°C temperature range	
	Industrial	-2 speed grade, low voltage and –40 to 100°C temperature range	

1. On-Chip Memory (Mb) = Max. Distributed RAM + Total Block RAM + UltraRAM

2. Estimated and subject to change based on actual hardware evaluation

3. Estimated values based on theoretical data

4. For the I-grade SOM, the data rate is 10.3125 Gb/s (only C-grade offers 12.5 Gb/s)

5. PCIe block configuration dependent on available transceivers

XMP499 (v1.1)



Kria™ Starter Kit Product Table

Comparison Metric	Feature	KV260 Vision AI Starter Kit	KR260 Robotics Starter Kit	KD240 Drives Starter Kit	
SOM used on the Starter Kit	Non-Production SOM ⁽¹⁾		K26 SOM	K24 SOM	
SOM to Carrier Connector	Samtec Connector	1x 240-pin	2x 240-pin	1x 240-pin, 1x 40-pin	
Networking/Comms	RJ-45	1x	4x (2x Processor Sub-system (PS), 2x Programmable Logic (PL))		3x (1x PS, 2x PL)
	SFP+	-	1x for GigE Vision		-
	RS-485	-	-		1x (PS-based)
	CAN	-	-		1x (PS-based)
Debug & Trace	JTAG PC4 Header (Debug)		Yes		
Security	Zynq™ UltraScale+™ MPSoC hardware root of trust (RoT) in support of secure boot. Infineon TPM2.0 in support of measured boot.				
Expansion Connectors	Pmod (12-pin)	1x	4x	1x (for IMU, supporting interfaces)	
	Expansion	-	Raspberry Pi HAT header (26 I/Os)		-
Memory/Boot Options	PS (capacity / width)	4GB (4 x 512Mb x 16 bit) [non-ECC]			2GB LPDDR (2 channel x 256 Mb x 16 bit/channel) [non-ECC]
	QSPI	512 Mb QSPI, Primary Boot Option			
	microSD Card	Yes (up to 64GB), Secondary Boot Option			
Camera	MIPI	2x IAS interface (+AP1302 ISP), supports auto-focus	-	-	
	SLVS-EC	-	1x (Gen2 x 2 lane)		-
	Raspberry Pi	Yes	-		-
	USB 3.0 / 2.0 Downstream	x4 (Host, can also be used for other peripherals)			2x (Host, can also be used for other peripherals)
Video	HDMI Out	Yes	-	-	
	DisplayPort Out	Yes			-
	Video Codec Unit	Yes – 4K60p; H.264/265 Video Codec			-
Motors Control Interfaces and Sensor Peripherals	3-Phase Motor Connector	-		x1	
	QEI Connector	-		x1 Single Ended and x1 Differential, (with on board 2-pin header that is used to choose one of them)	
	Torque Sensor Connector	-		x1	
	Brake Control Connector	-		x1	
	DC Link Connector	-		x1	
	1-Wire Interface	-		x1	
Supported Accessories ⁽²⁾	Accessory packs sold by AMD	Kria™ KV260 Basic Accessory Pack (BACCP) Kria KV260 Power Supply and Adapter	Sony IMX547 Camera Kit (Offered in Color and Monochrome Versions)	Motor Accessory Pack (MACCP)	

1. Defeatured version of the production SOM, lacks eMMC boot options and is not fully qualified for reliability in harsh environments

2. Accessories are sold separately

Kria™ SOM Products Ordering Information

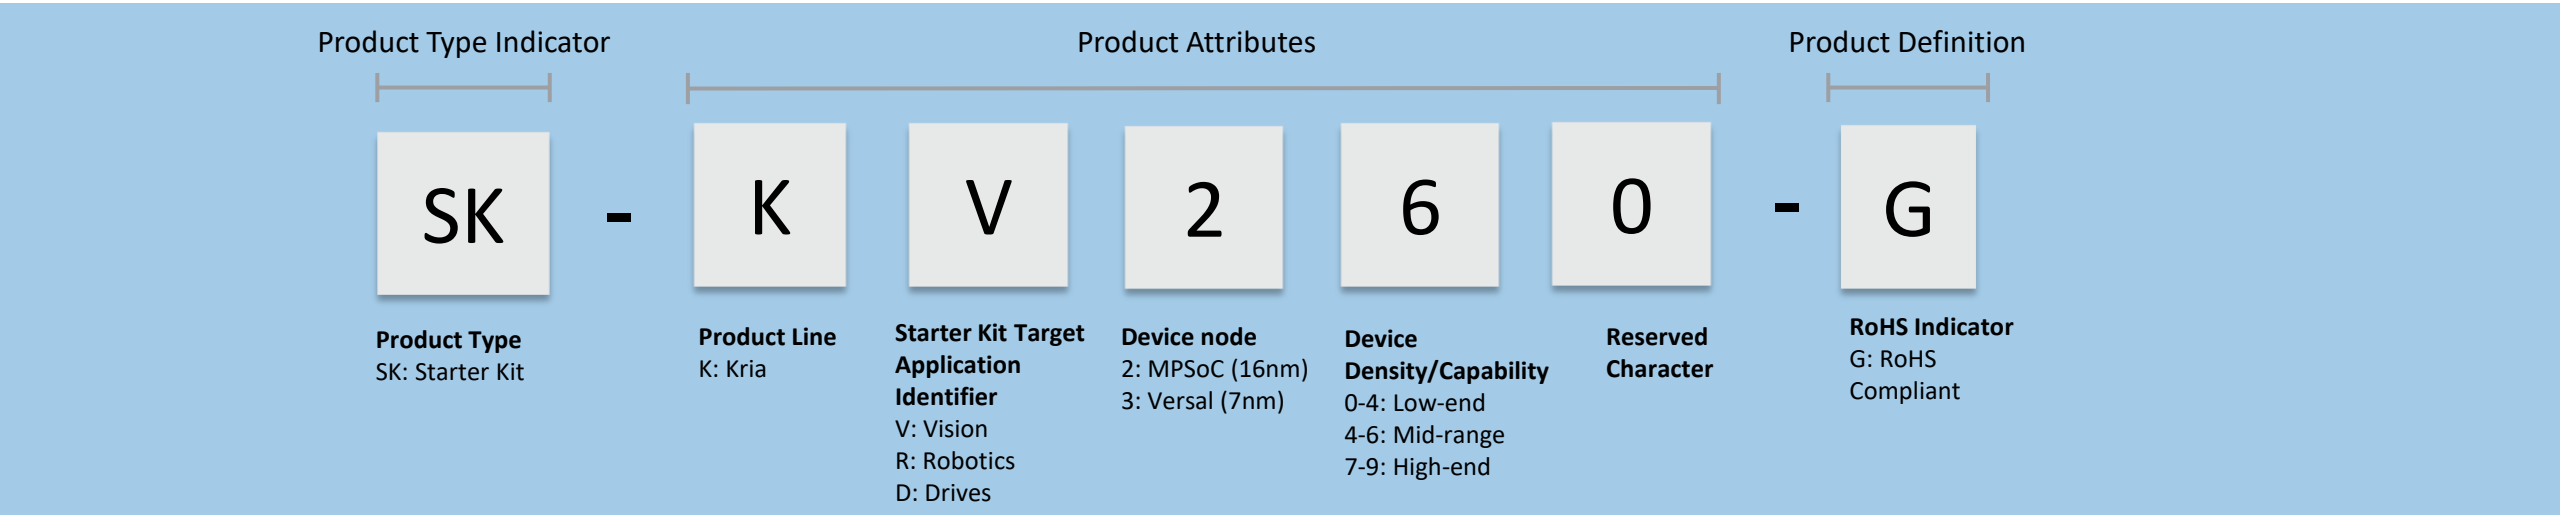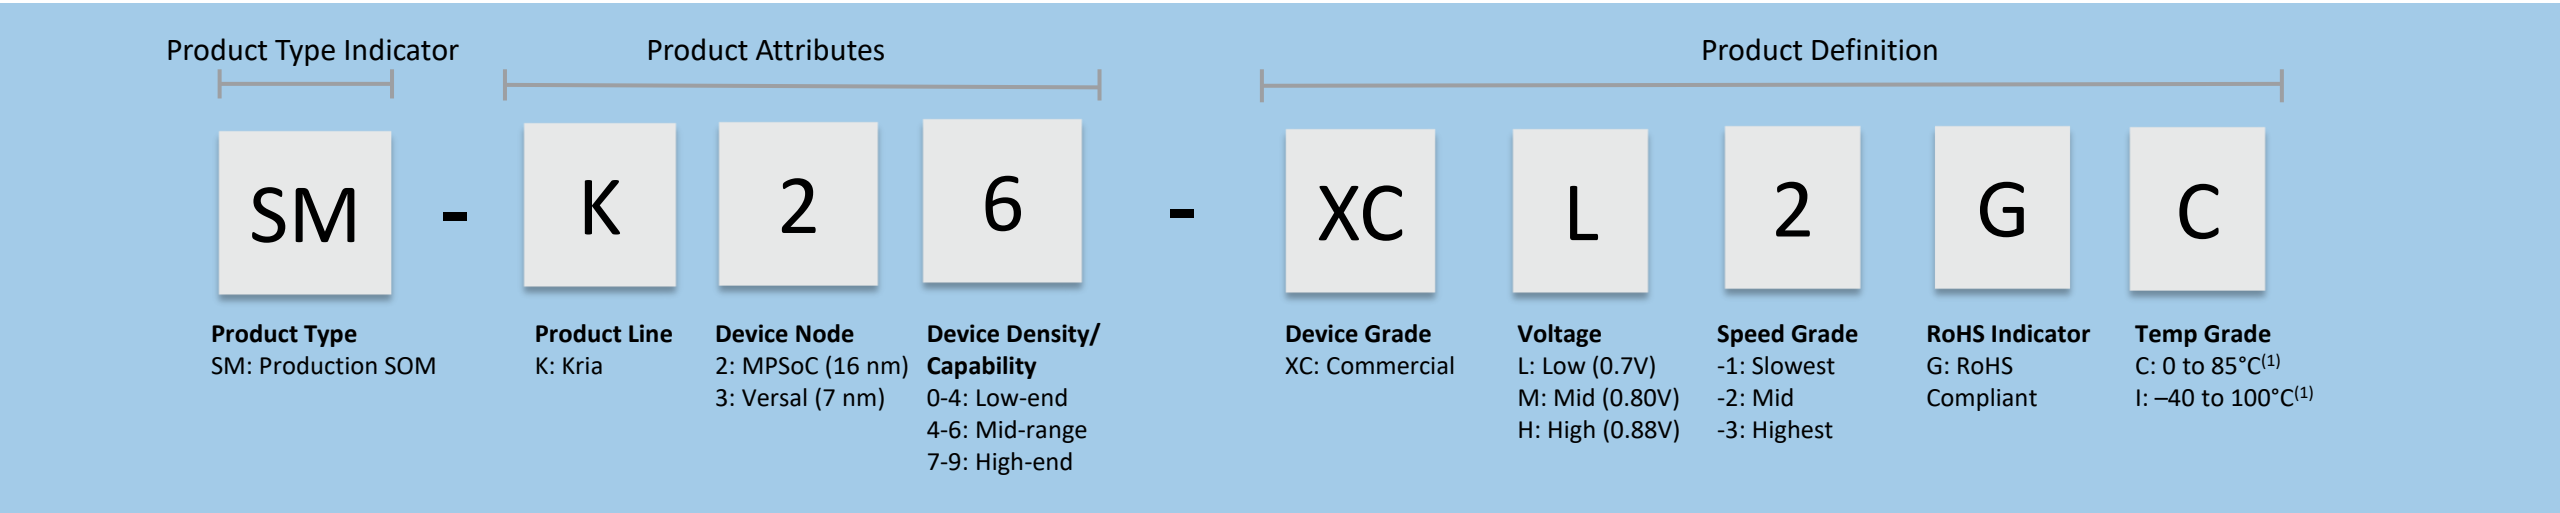

Note:
1. The K26 SOM maximum operating temperature is the temperature below which the product will operate at the specified clock speeds.



DISCLAIMER: The information contained herein is for informational purposes only and is subject to change without notice. While every precaution has been taken in the preparation of this document, it may contain technical inaccuracies, omissions and typographical errors, and AMD is under no obligation to update or otherwise correct this information. Advanced Micro Devices, Inc. makes no representations or warranties with respect to the accuracy or completeness of the contents of this document, and assumes no liability of any kind, including the implied warranties of noninfringement, merchantability or fitness for particular purposes, with respect to the operation or use of AMD hardware, software or other products described herein. No license, including implied or arising by estoppel, to any intellectual property rights is granted by this document. Terms and limitations applicable to the purchase or use of AMD products are as set forth in a signed agreement between the parties or in AMD's Standard Terms and Conditions of Sale. GD-18u.

© 2023–2025 Advanced Micro Devices, Inc. All rights reserved. AMD, the AMD Arrow logo, Kria, and combinations thereof are trademarks of Advanced Micro Devices, Inc. AMBA, AMBA Designer, Arm, ARM1176JZ-S, CoreSight, Cortex, PrimeCell, Mali, and MPCore are trademarks of Arm Limited in the EU and other countries. DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries. PCI, PCIe, and PCI Express are trademarks of PCI-SIG and used under license. Other product names used in this publication are for identification purposes only and may be trademarks of their respective owners. Certain AMD technologies may require third-party enablement or activation. Supported features may vary by operating system. Please confirm with the system manufacturer for specific features. No technology or product can be completely secure.