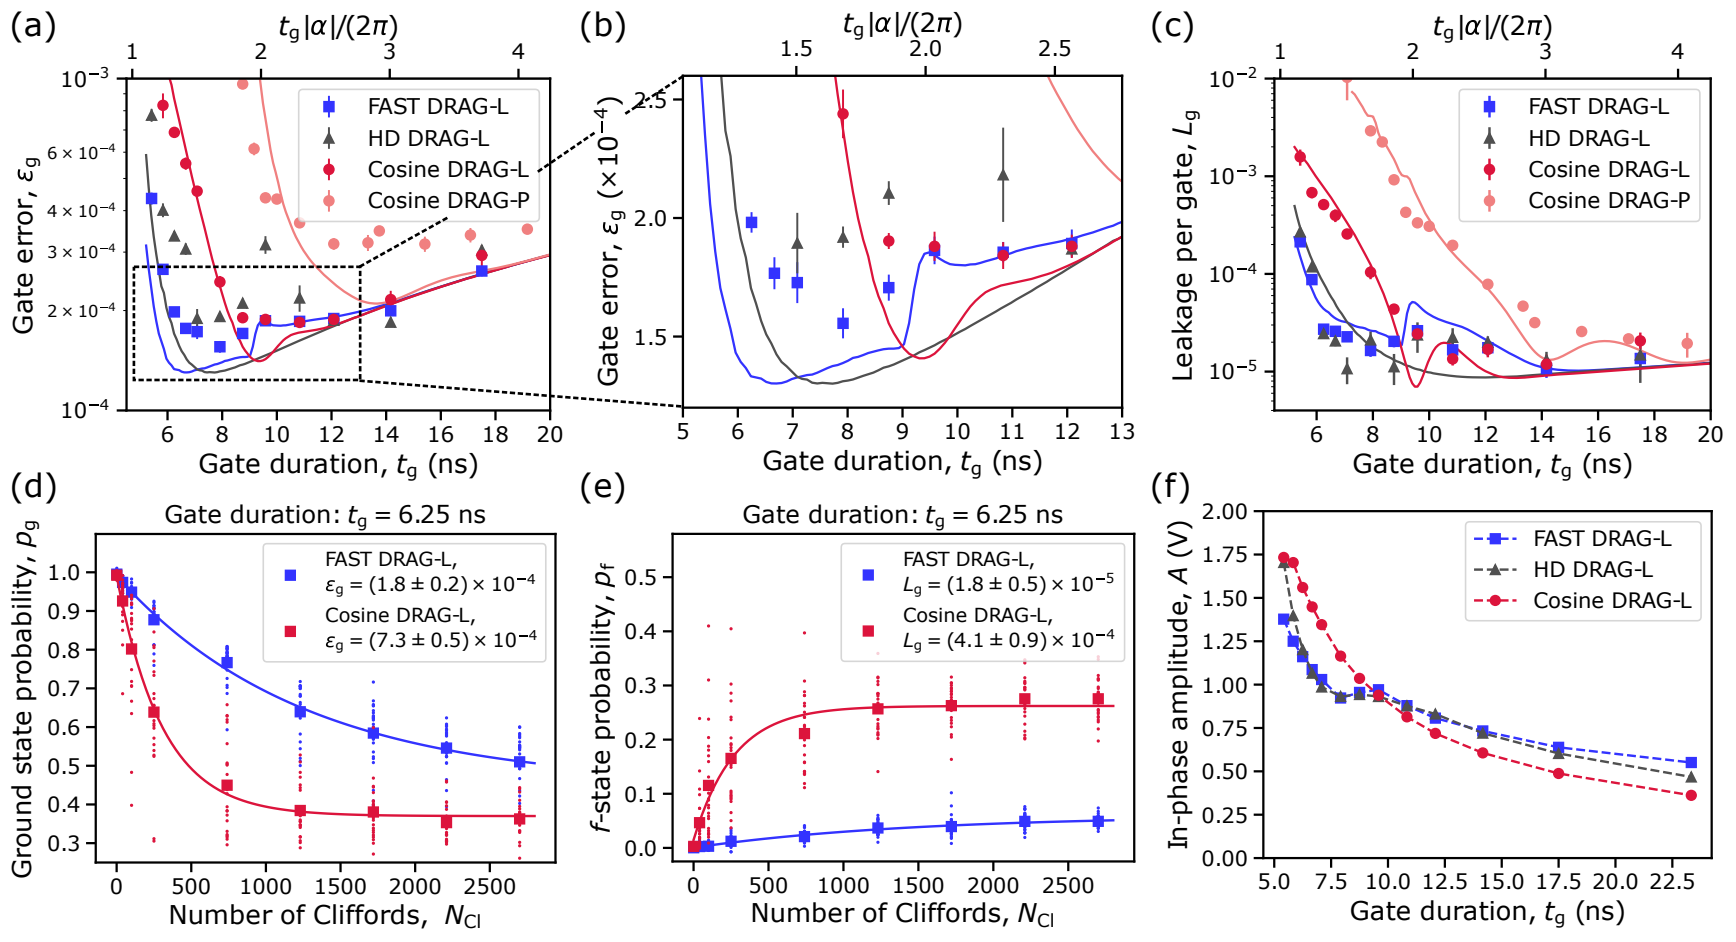
(a)
$t_g|\alpha|/(2\pi)$
Gate error, ε_g
Gate duration, t_g (ns)
FAST DRAG-L
HD DRAG-L
Cosine DRAG-L
Cosine DRAG-P
(b)
$t_g|\alpha|/(2\pi)$
Gate error, ε_g ($\times 10^{-4}$)
Gate duration, t_g (ns)
(c)
$t_g|\alpha|/(2\pi)$
Leakage per gate, L_g
Gate duration, t_g (ns)
FAST DRAG-L
HD DRAG-L
Cosine DRAG-L
Cosine DRAG-P
(d)
Gate duration: t_g = 6.25 ns
Ground state probability, p_g
Number of Cliffords, N_{Cl}
FAST DRAG-L, $\varepsilon_g = (1.8 \pm 0.2) \times 10^{-4}$
Cosine DRAG-L, $\varepsilon_g = (7.3 \pm 0.5) \times 10^{-4}$
(e)
Gate duration: t_g = 6.25 ns
f-state probability, p_f
Number of Cliffords, N_{Cl}
FAST DRAG-L, $L_g = (1.8 \pm 0.5) \times 10^{-5}$
Cosine DRAG-L, $L_g = (4.1 \pm 0.9) \times 10^{-4}$
(f)
In-phase amplitude, A (V)
Gate duration, t_g (ns)
FAST DRAG-L
HD DRAG-L
Cosine DRAG-L