armare ropes

Marine and yachting catalogue

ENGLISH VERSION

armare®
ropes

2017
Emirates Team New Zealand won
the 35th America's Cup
with ropes supplied by Armare Ropes.

2021
The adventure goes on. Once again Armare is an official supplier to Emirates Team New Zealand as they look to defend the America's Cup.

Armare Ropes Official Supplier to Emirates Team New Zealand

OFFICIAL SUPPLIER 2021
Defender America's Cup 36

Emirates TEAM NEW ZEALAND

Marine and yachting catalogue

“ARMARE” MEANS “TO PROVIDE A SHIP WITH ALL SHE NEEDS TO SAIL” OR “TO EQUIP A SAILING VESSEL”; THUS THE COMPANY’S NAME CONTAINS ITS VISION AS WELL AS A LINK TO ALL THOSE PRODUCTS ARMARE IS ABLE TO OFFER TO THE CUSTOMERS. FURTHERMORE, NOWADAYS THE BRAND ARMARE REPRESENTS THE CONTINUATION OF A LONG FAMILY TRADITION, WHOSE KNOWLEDGE HAS BEEN PASSED ON FROM FATHER TO SON.

Contents

INTRODUCTION
06 Company & Mission
08 Technical Fibers
10 Stretch & Creep
12 Treatments
14 Construction & Colours
16 Handcraft Finishes

18 ENDURANCE PROJECTS
22 PBO TW
22 Tecforce
23 Dyneforce Pure Black
23 Superound Pure Black
24 Shield Cores
26 Single Braids Shield
28 Covers

32 SUPER YACHT LINE
36 Dyneema® SK99 HPS PU + Covers
38 Dyneema® SK78 HPS PU + Covers
40 Captive Line

42 SUPER YACHT MOORING LINE
44 Storm Line Plus
44 Novus Line
45 Secur Line
45 Square Line PP
45 Storm Line
45 Round Line
45 Square Line

46 RACING LINE
49 Dyneforce 99 / 78
50 Dyneema® SK99 HPS PU + Covers
50 Dyneema® SK78 HPS PU + Covers

52 PERFORMANCE LINE
56 Dyneema® SK78 HPS PU + Covers
58 Dyneema® SK78 PU + Covers
60 Dyneema® SK78 + Covers
62 Vectran® PU + Covers

64 CRUISING LINE
66 Light 78 Plus
66 Light 78 Fast
66 Topspeed
66 Speedplus
66 Speedcruise
67 Star Plus
67 Star
67 Bora
67 Static
67 Armony

68 KITE & SURF
69 Dyneforce 99 for Kite
69 Kitedyne HPS
69 Kytedyne
69 Depower

70 CLASSIC LINE
72 Dyn 78 HPS PU - Pet
72 Light 78 Fast
72 Star
72 Fender Braid
73 Storm Line
73 Round Line
73 Square Line
73 Sea King

74 MOORING LINE
77 Secur Line
77 Novus L
77 Square
78 Storm L
78 Storm L
78 Round L
78 Square
78 Sea Kin

80 ONE DE
OPTIMIS
81 Gamber
82 Downha
82 Outhaul
82 Complet
82 Single F
82 Double
82 Strops
82 Kit Optir
83 Gamber
83 Optimist
83 Duck Li
83 Gamber
ONE DE
84 Zumba
84 Kumba
85 Hand Li
85 Lorenz L
85 Duck Line
85 DynElastic
86 Stop 1
86 Stop 2
86 Stop 3
86 Stop 4
86 Stop 5
87 Stop 6
87 Run Line
97 T-Bone
97 Ronstan Tie Plastic Balls
97 Ronstan Halyard Plastic Balls
98 Lash Bobbin
98 Big Bobbin for Loop
98 Electrical Heat-Cutter
98 Coating PU
98 Electronic Heat-Cutter
99 5 Needles for Sewing
104 Armare Shop Rack
104 Armare bag for ropes

105 Use and safety instructions

Armare Ropes

ARMARE PRODUCES A VAST RANGE OF ROPES, COMPOSITE CABLES, HIGH QUALITY RUNNING AND STANDING RIGGING EQUIPMENT, FOR RACING AND CRUISING SAIL BOATS, FOR MOTOR AND SAILING SUPER YACHTS. THE SPECIAL HANDCRAFTED FINISHES ARE ARMARE'S STRENGTH AND THE DISTINCTIVE CHARACTERISTIC OF ITS PRODUCTS.

A company, a history, a mission

Following a long family tradition, Armare designs, manufactures and tests its products in Italy, in its facilities in San Giorgio di Nogaro (UD) – 4.000 Sq. m of twisting, stranding, braiding, different special treatments, splicing, testing and hand-finishing.

The wide range of Armare products includes technical solutions for both sailing and power boats, but also cordage for aerospace, military, medical, sports, oceanographic, professional fishing and many industrial applications.

One of the hallmarks of Armare, is the ability to personalise the already wide range of products, with custom finishes: this unique offer allows all operators, project managers, riggers, owners or shore-teams, to satisfy every POSSIBLE NEED.

Moreover Armare stands for reliability and safety, for the ability to make particular handmade finishings and splicings and last but not least for short delivery times.
To deal with an always quicker technological evolution and the advent of technical fibers, increasingly sophisticated and with extreme performance, Armare makes permanent investment in research and innovation to develop avant-garde solutions. The collaboration with the most qualified riggers and the most renowned technicians of the marine sector, has enabled Armare to supply composite-cables, running rigging and special textile accessories to the most famous sailing teams and prestigious shipyards. Armare is recognized as a leading company within the highest sectors.

Furthermore, starting from 2016, Armare has been selected as official supplier to Emirates Team New Zealand, winner of the 35th America's Cup.

A sustainable development

Since its establishment, Armare has undertaken a company policy of respect towards the territory in which it was founded and continues to work, protecting the environment, not only as far as its internal operations are concerned, but also considering the production materials, in strict accordance with the latest concepts of environmental sustainability and environmental friendliness. The recycling average of the Armare production chain is more than 96%.

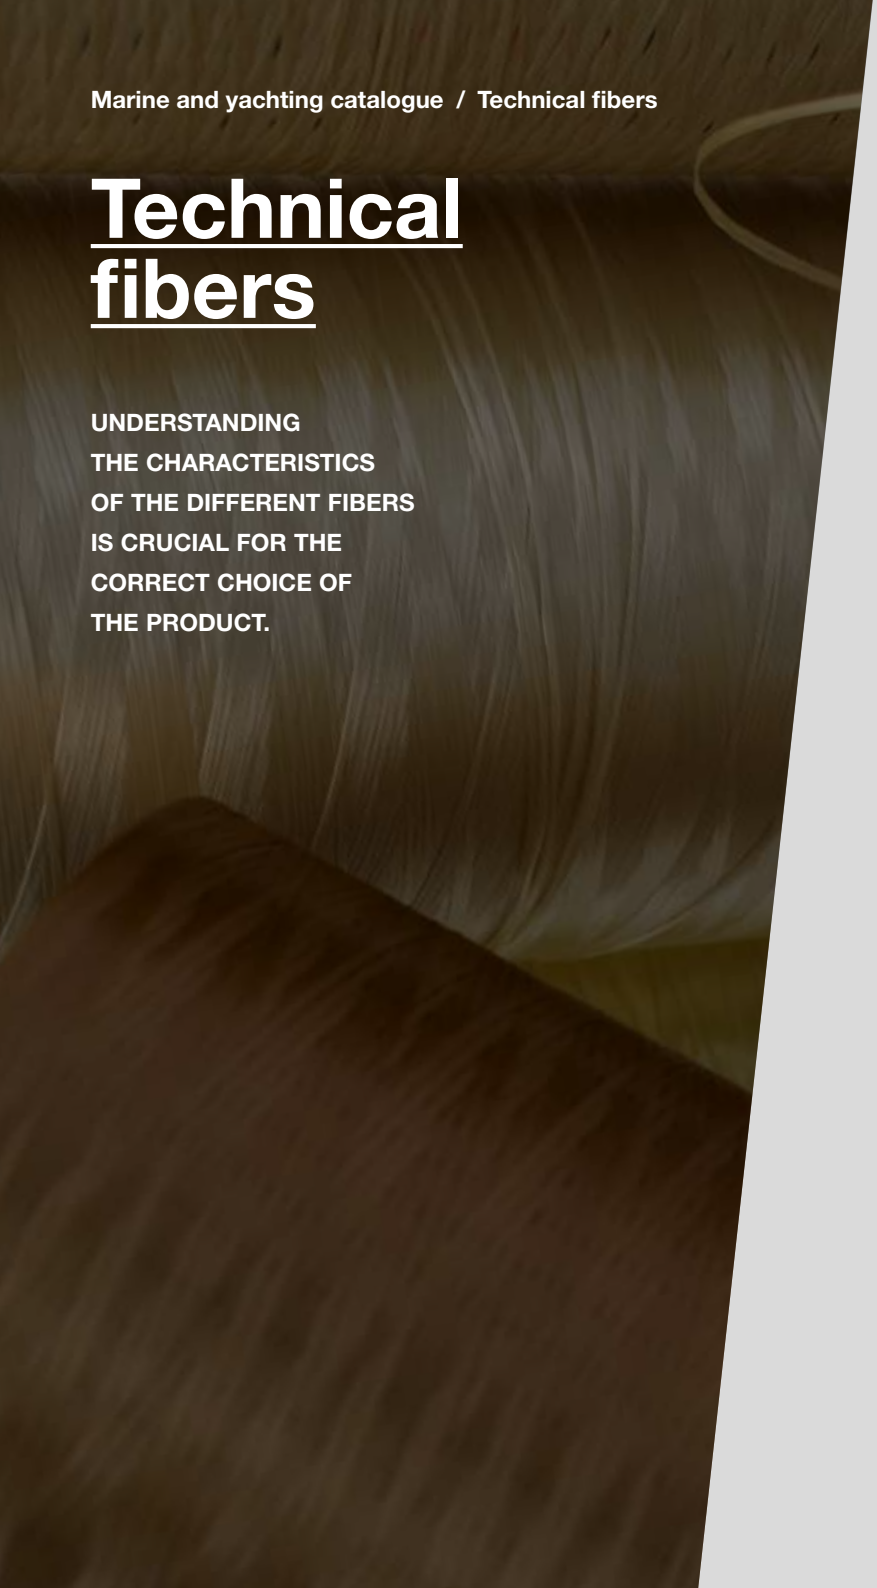

Technical fibers

UNDERSTANDING THE CHARACTERISTICS OF THE DIFFERENT FIBERS IS CRUCIAL FOR THE CORRECT CHOICE OF THE PRODUCT.

Conventional and basic fibers

There are two basic fibers most commonly used for the production of ropes:

- **Polyester (PET)**
- **Polyamide (PA)**

Technical fibers

Other technical fibers are derived from the “aromatisation” of the basic fibers.

Fibers derived from Polyester:
- **Vectran® (LCP)**

Fibers derived from Polyamide:
- **Kevlar®**
- **Twaron®**
- **Technora®**

COMPARATIVE TABLE OF THE PROPERTIES OF THE FIBERS USED BY ARMARE

NAME	MATERIAL	TENACITY	ELONGATION	SPECIFIC GRAVITY	ATMOSPHERIC AGENTS RESISTANCE	ABRASION RESISTANCE	FUSION TEMP.
		[cN/dTex]	[%]	[Kg/dm³]	[-]	[-]	[°C]
DYNEEMA® DM20	**HMPE**	35,1	3,5	0,975	Excellent	Very good	147
DYNEEMA® SK99	**HMPE**	42,5	3,2	0,975	Excellent	Very good	147
DYNEEMA® SK78	**HMPE**	35,1	3,5	0,975	Excellent	Very good	147
ZYLON®	**PBO**	37	2,5	1,56	Very poor	Little	660
KEVLAR® / TWARON®	**ARAMID**	20,8	2,4	1,44	Little	Poor	430
VECTRAN®	**LCP**	24,2	3,3	1,41	Poor	Little	330
TECHNORA®	**ARAMID**	22,3	4,0	1,39	Little	Poor	500
POLYESTER	**PET**	7,6	12,3	1,38	Good	Very good	260
HMPE NO BRAND	**HMPE**	29	4,0	0,97	Excellent	Good	144

High performance technical fibers

Nowadays two further fibres are among the most important used for high performance applications.
They are completely differing one another in chemical composition as well as in general technical characteristics.
Their acronyms are HMPE and PBO and their trade names are respectively:

- **Dyneema®**
- **Spectra®**
- **Zylon®**

Although the Dyneema® fiber is available in different types, it keeps constant basic characteristics and offers a wide range of performances when coupled to different covers.

LEARNING MORE ABOUT THE DIFFERENT FIBERS

CONVENTIONAL BASIC FIBERS	TECHNICAL FIBERS	HIGH PERFORMANCE TECHNICAL FIBERS
PET (POLYESTER) DACRON® TREVIRA® DIOLEN®	**LCP** VECTRAN®	**HMPE** DYNEEMA® SPECTRA®
PA (POLYAMIDE) NYLON® ENKALON® PERLON®	**ARAMID** KEVLAR® TWARON® TECHNORA®	**PBO** ZYLON®

Stretch & Creep

THERE ARE MANY WAYS TO CONSTRUCT A ROPE; DEPENDING ON THE CONSTRUCTION AND WHETHER THERE IS AN OPTIMAL USE OF THE FIBERS, YOU'LL BE ABLE TO NOTICE DIFFERENT ELONGATIONS.

The real performance is the core of the rope

The outside of many ropes looks exactly the same. Of course, most of the running riggings are protected by a cover to improve the resistance to abrasion and to increase the grip on the winch though the load is carried by the core. Fibers used for the core of the rope can be pre-stretched and PU coated.

Above all, the core can be constructed with different fibers to take the load. Choosing the right cover is important to improve the performance of the rope and depends on the use and the accessories which are applied to.

MATERIAL TECHNOLOGY COMPARISON

	DYNEEMA® SK99	DYNEEMA® SK78	DYNEEMA® DM20	HMPE	VECTRAN®	POLYESTER
Perfect fit for	Best in class racing performance	Industry standard for running rigging lines	Standing rigging and ropes under constant tension	Cruising boat Daily Cruiser	Ideal under static loads and optimal for steering line systems	Daily Cruiser
Lightweight at the same strength	•••••	••••	•••	••••	•••	•
Responsiveness	•••••	••••	•••	•••	••••	•
Stretch (reversible elongation)	•••••	•••••	•••••	•••	••••	•
Creep (irreversible elongation)	•••	•••	•••••	•••	•••••	•••

• Poor •• Enough ••• Good •••• Very Good ••••• Excellent

Stretch

The stretch is a **reversible elongation of the fiber.**
The words “elongation” and “stretch” have the same meaning and indicate the phenomenon related to the fibers of a rope that, when subjected to tension, return to their original length when the tension is released. This phenomenon is called “reversible lengthening” or “elastic”. The elongation of the fiber is related to the specific “modulus” of the same and indicates how much resistance the fiber is able to oppose to elongation. The higher the value of the modulus, the lower the elongation.

Creep

Creep is an **irreversible elongation of the fiber.**
It is the characteristic of the fiber with which the rope has been made. The fiber creeps when subjected to a constant load for a given time.
The process is irreversible and is called “plastic elongation”. This deformation depends on the applied load, on the time which the load is maintained and on the temperature. The higher the temperature to which the line is subjected, the greater the elongation of the rope.

Low stretch ropes

When a halyard or a sheet elongates, the sail loses its correct air foil shape, so the boat cannot accelerate and fully exploit its power. Furthermore, the more elastic the rope, the more energy it absorbs.
This energy is taken away from the sail: the loss of energy affects acceleration, especially in gusty conditions, with the result of a continuous need for adjustment of the rope / sail and with appreciable reductions of navigation performance.

TECHNICAL FIBERS: ELONGATION AT BREAK

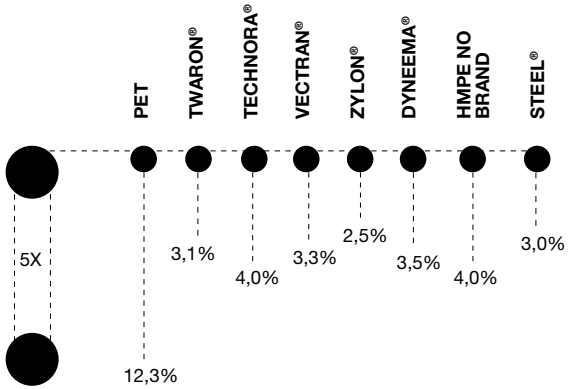

Synthetic fibers tested in accordance with ISO 2062

RESIDUAL STRENGTH OF TECHNICAL FIBERS

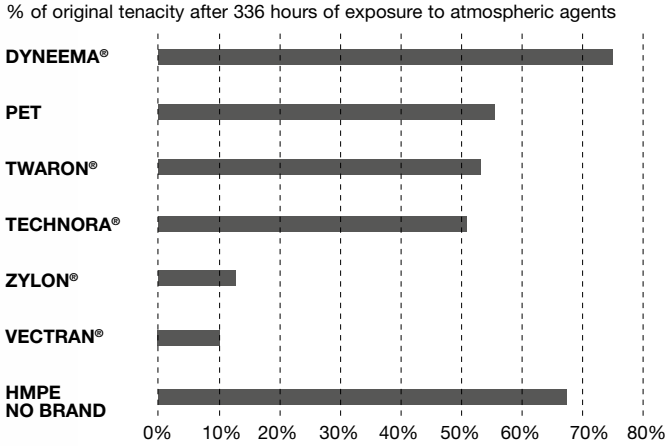

Simulation of aging according to standard ASTM G-155
Synthetic fibers tested in accordance with ISO 2062

Treatments

/ HPS
/ Shield
/ Captive
/ PU

DIFFERENT SPECIAL TREATMENTS MAY BE APPLIED TO THE BRAIDED CORES AND TO THE TECHNICAL FIBERS TO ENHANCE THEIR CHARACTERISTICS IN TERMS OF ELONGATION, CREEP AND RESISTANCE, AND TO OBTAIN EVEN BETTER PERFORMANCE.

HPS TREATMENT

HPS treatment

The Heat Prestretch Settings regulates the tensioning of the fibers that make up the rope and sets them in an optimal way, bringing them to a high temperature and subjecting them constant load for a given time. The result is a rope with a very high specific modulus, without construction elongation and a higher breaking load, if compared with non-prestretched ones. Furthermore, the rope is much more compact, less flexible and therefore thinner than a rope with the same non-prestretched core. On performing boats is to be preferred to use prestretched ropes on halyards. In this application, the slightly higher stiffness of the ropes will not be a problem, as they are used much less than other lines, On high-level racing boats, almost all the running rigging is made with pre-stretched ropes; among them the fiber used and the composition of the cover can vary.

The main advantages of the HPS treatment

- Specific modulus increase
- Decreased constructive elongation
- Breaking load increase
- Greater compactness
- Decrease in diameter
- Decreased flexibility

Single braid Dyneema®
without HPS treatment:
the braid is soft and “airy”.

The braid after the HPS treatment:
the fibers are oriented and the rope
is more rigid and compact.

Shield Treatment

Armare Ropes introduces the “Shield process”, a latest generation treatment which represents the best defense against the wear of the rope.

“Shield” is the name given to a specific unifilar impregnation treatment applied to the Dyneema® fiber by using a very special protective coating that creates a kind of “Shield” all around the pure fiber. Apart from reducing the exposure of the fibers to UV rays thanks to its opaque pigments, it also lowers remarkably the friction between the fibers themselves, usually caused by the load applied to the ropes and/or by the movement and bending around the pulleys. Besides the mentioned points, it has been proved that “Shields” significantly increase the fatigue and flexion cycles of the ropes realized in Dyneema® and it is used extensively for the construction of the best performing ropes.

Captive Winch Treatment

Treatment applied on the ropes intended for Super Yachts, for use on Captive Winch of any type and size. The treated ropes maintain high breaking loads and low elongation, thanks to the use of high modulus fibers.

The complete adherence of core and cover is guaranteed even after countless cycles of winding and unwinding of the rope on the drum as well as after the run through different drive gears. To avoid any formation of those undesirable slacks between core and cover, the “Captive” treatment must always go with a careful and precise production and finish of the rope/maneuver.

PU Coating Treatment

The Dyneema® braid impregnated with the Polyurethane Coating gains remarkable advantages in terms of compactness, reduction of compression under load and, therefore, roundness.

This coating becomes even more important when the ropes have to be worked and/or when the cover has to be removed as the polyurethane keeps the Dyneema® fiber linked, this increases the quality of the product in terms of durability and abrasion resistance.

Armare colour system

THANKS TO THE EXCLUSIVE ARMARE COLOUR SYSTEM, LOOK (OR CONSTRUCTION) AND COLOUR OF THE ROPES CAN BE CUSTOMIZED. THE DOPE-DYED HIGH TENACITY POLYESTER GUARANTEES A LOW ELONGATION, LIGHT FASTNESS AND A GOOD RESISTANCE TO ATMOSPHERIC AGENTS AND ABRASION.

Constructions and Colours

Ropes, especially the technical ones, can be single braid or double braid. In the first case, the fiber (typically Dyneema®) is left without cover. In the second case, the fiber is protected by a second layer (the cover) with protective functions, but also to make the rope more manageable and with a better grip. The color, or mix of colors of the sock can be chosen among the many available, following the indications on the composition, by taking into consideration the type of construction and the fiber.

Single braid

Some ropes, like Vec-Tec and Dyneforce have a single braid construction. They are very easy to splice.

Double braid

This is the most widely used type of construction, with an internal braided core and a protective outer braid. They are medium-difficult to splice.

Colours of the technical fibers

Dyneema®

Vectran®

Kevlar®

Gold Technora®

PBO-Zylon®

Black Technora®

Cordura® + Polyester

PET colours

01 White

02 Black

03 Anthracite

04 Silver Grey

05 Brown



06 Hemp

07 Beige

08 Yellow

09 Fluo Yellow

10 Red

11 Orange

12 Fluo Orange

13 Violet

14 Bordeaux

15 Green

16 Fluo Green



17 English Green

18 Military Green

19 Azure

20 Sea Blue

21 Navy Blue

22 Pink

24 Japan Orange

Constructive mix for double braid ropes



Solid Colour
The cover is entirely manufactured in solid colour. Choose the colour from our standard colour palette or from special / custom colours.



Fleck 1
The cover is entirely manufactured in solid colour, with one coloured fleck. Choose the colour for the base as well as the colour of the fleck from our standard colour palette or from special / custom colours.



Fleck 2
The cover is entirely manufactured in solid colour, with two coloured flecks. Choose the colour for the base as well as the colour of the flecks from our standard colour palette or from special / custom colours.

Marker
The cover is usually entirely manufactured in solid white colour, with coloured flecks. You may also choose a different colour for the cover as well as the number and colour of the markers from our standard colour palette or from special / custom colours.



Mix
The cover is manufactured combining two different but paired colours.
Choose the colour for the base as well as the colour of the contrasting pattern from our standard colour palette or from special / custom colours.

Snake
The cover is manufactured using two different colours to obtain a snake pattern.
Choose the colour for the base as well as the colour of the contrasting pattern from our standard colour palette or from special / custom colours.



Melange
The cover is composed of two different colours that have been coupled previously.
Choose both colours from our standard colour palette or from special / custom colours.

Melange Techno
Melange Techno covers are madeof random mixed, technical fibers. The final result is a mixture of natural colours, influenced only by the percentage of each fiber, part of the composition.

Handcraft Finishes

ARMARE ROPES OFFERS MANY HANDCRAFTED FINISHES ON THE ROPES THAT CAN BE CUSTOMIZED WITH SPLICES, PROTECTIONS OR WITH THE APPLICATION OF THIMBLES AND OTHER TERMINALS ACCORDING TO SPECIFIC REQUESTS.

Main advantages with handcraft finishes

Maintainance of almost the overall load performance.

Immediate and practical final use of the rope.

Preparation for prolonged use, without further action. (ex. the “milking” of the sock to eliminate slacks created with use).

Pre-settling of the rope: splicing requires the application of a minimum traction load, that aligns the fibers and stretches them.

Splices, lashings, taperings

Ropes often require some splicing or different finishes, depending on the intended use, whether on board of the boat, for the use by sailmakers, for industrial application or for security purposes. These special processes are carried out by Armare, either at its laboratory or directly on board: they are very accurated both technically and aesthetically.

Important notes on splicing

For each type of construction of the lines, there is a different method of splicing (i.e. the creation of a loop on one or both ends of the line), designed to minimize the loss of breaking load which results from this process. An accurately constructed splice retains 80% to 90% of the breaking load of a brand new rope. An incorrect splice, can reduce the breaking load of a brand new rope by more than 60%; this means that the suggested working load of the rope is very close to the breaking load. This also applies to knots that can halve the strength of the rope, as the fibers are strangled against each other, cutting themselves where the pressure is the highest.

Available Splices

Single Braid

Eye splice single braid
Code L01

Eye splice on stainless thimble
single braid / **Code L04**

Splice on lash bobbin single braid
Code L09

Double Braid

Eye splice without cover double braid
Code L02

Eye splice without cover on stainless thimble
double braid / **Code L05**

Eye Splice without cover on lash bobbin
double braid / **Code L10**

Eye splice with cover double braid
Code L03

Eye splice with cover on stainless thimble
double braid / **Code L06**

Eye Splice with cover on lash bobbin
double braid / **Code L11**

Available Finishes

Tapering on double braid
Code L07

Halyard spliced loop for mousing line
Code L14

Whipping on rope end
Code L16

Dyneema® TIP on double braid
Code L08

Sewn loop end and protective cover
Code L15

Sewed by sewing machine
Code L26

Endurance projects

THE PRODUCTS SHOWN IN THIS SECTION ARE THE RESULT OF SEVERAL TESTS AND FEEDBACK RECEIVED FROM THE BEST RIGGERS, SHORE-TEAMS AND CREWS OF THE MOST PRESTIGIOUS RACING BOATS WORLDWIDE.

SINGLE BRAID

PBO TW
Treatments: PU

Tecforce
Treatments: PU

Dyneforce Pure Black
Treatments: HPS / PU

Superound Pure Black
Treatments: PU

SINGLE BRAID SHIELD

Dyneema® DM20 SHIELD
Treatments: HPS / SH

Dyneema® SK99 SHIELD
Treatments: HPS / SH

Dyneema® SK78 SHIELD
Treatments: HPS / SH

Dyneema® SK78 SHIELD
Treatments: SH

ANIME SHIELD

Dyneema® DM20 SHIELD
Treatments: HPS / SH

Dyneema® SK99 SHIELD
Treatments: HPS / SH

Dyneema® SK78 SHIELD
Treatments: HPS / SH

Dyneema® SK78 SHIELD
Treatments: SH

AVAILABLE COVERS

PBO-Zylon®
PBO

PBO-Zylon®
Black Technora®
PBO / BTEC

PBO-Zylon®
Black Dyneema®
PBO / CDYN

PBO - Zylon®
Black Technora®
Black Dyneema®
PBO / BTEC / CDYN

Black Technora®
Black Dyneema®
BTEC / CDYN

Black Technora®
Black Dyneema®
Polyester
BTEC / CDYN / PET

Last generation treatments

Armare, always at the forefront of research and testing of new materials, proposes innovative solutions to keep the color of the used fibers as stable as possible, while ensuringa high protection of the fibers.

Pure Black Dyneema®

NEW

The best solution to protect the colour against UV rays.
Thanks to the new entry of Dyneema® BK (BLACK), nowadays we are able to produce a black rope totally made with Dyneema® without degradation of colour. **Dyneema® BK is dope-dyed** i.e. black colour pigments are added to the fibre while extruded. This process allows to obtain a stable and long lasting coloring of the fibre without any compromise in terms of durability and resistance to UV rays.

Shield Treatment

NEW

The highest protection against wear.
The other type of treatment introduced by Armare is the Shield Treatment. In this case the external surface of the fibre **is colored / impregnated**; in fact, when cutting it you will notice that the inner fibre is white. This procedure allows the perfect distribution of the coating over the entire surface of the fiber, enhancing the quality of the finished product, both from a technical and aesthetical point of view.
The **shield created by this treatment**, from which the name “Shield” derives, also brings a noticeable improvement in terms of duration of the rope, thanks to the increased compactness and resistance to abrasion.

Differences between pigmenting

The difference between pigmenting through the “dope-dyed” process and dyeing the yarn made with Dyneema® fiber through any other coloring process can be summarized as explained on the right.
We can point out that the **“DOPE-DYED”** coloring allows to obtain a stable and durable black colour with a slight loss of technical performance in terms of breaking load.
Coloring by impregnation with **“SHIELD”** treatment on the single-strand fiber is less durable in terms of resistance of the pigment to the light, but it doesn’t affect the performance of Dyneema® fibers as it doesn’t interfere with its molecular structure.
This treatment rather improves some of the characteristics of the final rope, especially the reduction of the phenomenon known as “yarn to yarn friction”, as to say the friction that occurs between the fibers when subjected to loading and repeated movements.

Dope-Dyed process (Pure Black Dyneema®)

The fiber is colored in and out i.e. when slicing it you will see that the color is uniformly present on the whole surface of the sectioned filament.

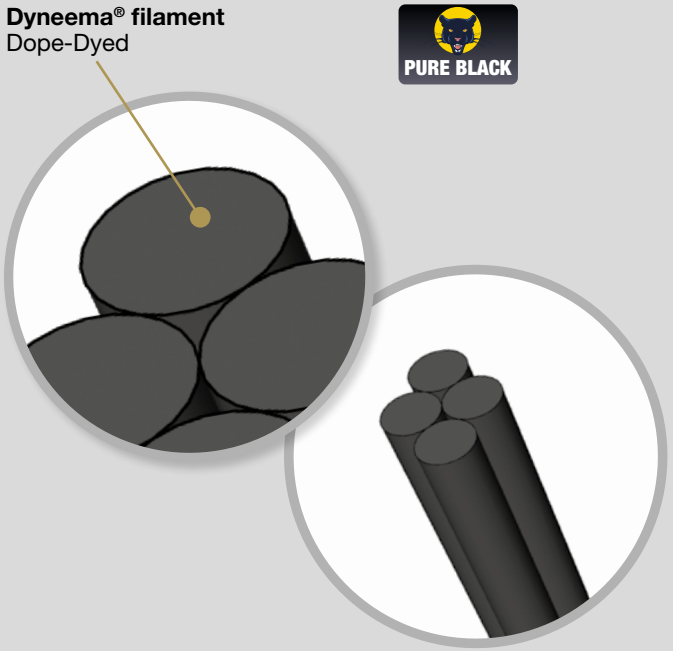

The Dyneema® filaments are fully impregnated with pigment during the spinning (Dope-Dyed) and the result is a solid colour that is the same in and outside the base filament.

Shield process

The basic fiber is impregnated with a coating that dyes it only externally. I.e.: when slicing it, the inner side is white while the external surface is pigmented.

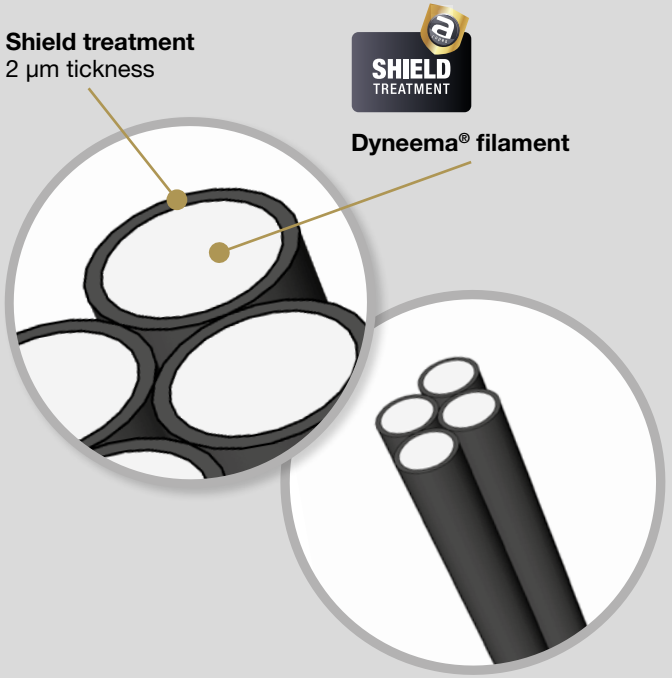

The Dyneema® filaments are spinning in a raw/natural colour and in a second phase they are coated with a special coating blend PU based.

Single Braid

PBO TW (PBO-Zylon® + PU)

Designed to equip the best sail boats, PBO-Zylon® guarantees the lowest elongation, a high breaking load, elevated mechanical resistance and optimal flexibility. Moreover, the high shape stability on winches and stoppers, the lightweight and its good handling make this rope the excellent partner of the most demanding crews.

Ø	PBO TW SINGLE BRAID	
	NA56C00	
DIAM	B. L.	WEIGHT
[mm]	[daN]	[g /m]
3	1.260	6,50
3,5	1.680	8,80
4	2.220	13,00
5	3.500	20,00
6	4.750	27,00
7	6.600	37,00
8	8.640	52,00
9	10.500	61,00
10	12.830	78,00
11	14.420	92,00
12	17.100	110,00
13	19.000	125,00
14	21.000	140,00
15	23.400	157,00

100% PBO PU COATED TREATMENT

PRODUCT CODE NA56C00

CONSTRUCTION
12 plait with PBO-Zylon® impregnated with polyurethane coating.

USE Ideal for strops, tackles and underdeck low elongation manoeuvres, or used inside machines or covered by carters which protect from the UV exposure.

STANDARD DIAMETERS
From 3 to 15 mm.
Other diameters on request.

STRETCH AT 30% B. L. 1,80%
STRETCH AT B. L. 2,85%

COLOUR Black.

Black

Tecforce (Black Technora® + PU)

NEW

Particularities of this aramid fiber are its good resistance to UV rays and to bending if compared to other standard aramid fibers; these properties allow to obtain long lasting ropes with a good breaking load and a low elongation. A very oriented molecular structure guarantees a high modulus with a low creep. Tecforce is therefore mainly used for bindings, reinforcements as well as for all those applications where an important breaking load but also a high resistance to abrasion and elongation are required.

Ø	TECFORCE SINGLE BRAID	
	TA52C00	
DIAM	B. L.	WEIGHT
[mm]	[daN]	[g /m]
4	1.880	12,00
5	2.650	18,00
6	3.170	25,00
7	4.750	27,90
8	6.336	45,00
9	7.168	60,00
10	8.000	74,00
11	10.000	80,00
12	12.000	85,00
14	16.850	107,00

100% TECHNORA PU COATED TREATMENT

PRODUCT CODE TA52C00

CONSTRUCTION
12 plait with Black Technora® 100% impregnated with polyurethane coating.

USE Ideal for tackles and for bindings where high abrasion and UV resistance are required.

STANDARD DIAMETERS
From 4 to 14 mm.
Other diameters on request.

STRETCH AT 30% B. L. 2,95%
STRETCH AT B. L. 4,45%

COLOUR Black.

Black

Single Braid

Dyneforce Pure Black

NEW

The already well-known performances of our former Dyneforce75 (replaced by Dyneforce 78) will be proposed again in its new version Dyneema® SK 75 BK. The main characteristic of this fiber, named Dyneema® Pure Black, consists in having a colour that can't be attacked by any agent, since the fiber is dope-dyed (see page 20). Besides its remarkable technical performances, the aesthetic is given by the colour that won't fade over time.

Ø	DYNEFORCE PURE BLACK SINGLE BRAID	
	NA77C00_CDY	
DIAM	B. L.	WEIGHT
[mm]	[daN]	[g /m]
3	1.068	6,80
3,5	1.400	8,20
4	2.250	10,10
5	2.980	15,30
6	5.000	24,00
7	6.400	31,10
8	8.200	38,20
9	9.500	51,10
10	11.600	60,00
11	13.100	77,00
12	16.000	94,00
13	17.780	110,00
14	20.000	128,00

100% SK75 · HPS TREATMENT · PU COATED TREATMENT · PURE BLACK

PRODUCT CODE NA77C00_CDY

CONSTRUCTION
12 plait with Dyneema® SK75 Pure Black impregnated with polyurethane coating and special heat treatment HPS.

USE All use as a standard Single Braid in Dyneema® but with a structural solid colour.

STANDARD DIAMETERS
From 3 to 14 mm.
Other diameters on request.

STRETCH AT 30% B. L. 2,16%
STRETCH AT B. L. 3,20%

COLOUR Pure Black.

Pure Black

Superound Pure Black

NEW

The renewed version of this specific item, made with Dyneema® SK75 BK (or Dyneema® Pure Black) maintains its basic features and on top of that the fiber is dope-dyed (see explanation at page 20). The result is a long-lasting colour that doesn't fade over time, while excellent technical performances are guaranteed.

Ø	SUPEROUND PURE BLACK SINGLE BRAID	
	NA67C00_CDY	
DIAM	B. L.	WEIGHT
[mm]	[daN]	[g /m]
3	730	5,00
3,5	1.100	7,50
4	1.530	9,80
5	2.300	14,40
6	3.230	20,00
7	4.560	27,00
8	6.100	35,00
9	7.270	46,00
10	9.000	57,00
11	10.200	61,00
12	12.000	68,00
13	13.250	73,00
14	14.500	78,00

100% SK75 · PU COATED TREATMENT · PURE BLACK

PRODUCT CODE NA67C00_CDY

CONSTRUCTION
12 plait with Dyneema® SK75 Pure Black impregnated with polyurethane coating.

USE All use as a standard Single Braid in Dyneema® but with a structural solid colour.

STANDARD DIAMETERS
From 3 to 14 mm.
Other diameters on request.

STRETCH AT 30% B. L. 2,60%
STRETCH AT B. L. 3,60%

COLOURS Pure Black.

Pure Black

Shield Cores

NEW

Dyneema® DM20 HPS / SHIELD

Dyneema® DM20 has been created to satisfy specific marine/industrial needs.
Compared to other types of Dyneema®, it shows better performance in terms of durability over time as well as a close to zero creep. Its very stable construction allows Armare to produce a rope that is suitable for all those applications where a constant load and a continued use would put to the test any other type of Dyneema®. Furthermore, the Shield treatment increases the compactness and the abrasion resistance of this rope.

NEW

Dyneema® SK99 HPS / SHIELD

Dyneema® SK99 delivers the highest tenacity available in a light weight polymer fiber. Indeed, compared to Dyneema® SK78, it shows a 20% increase on tenacity and a 35% higher modulus. Dyneema® SK99 appears thinner and lighter weight respect to ropes with the same diameter, but with a significant increase in strength, which entails an increase on performance and a better response of the boat. Moreover, thanks to the application of the Shield treatment, the ropes results more compact and more resistant to abrasion. Other features: low water absorption, high UV resistance, minimal elongation and good flexibility.

NEW

Dyneema® SK78 HPS / SHIELD

The High Modulus fiber Dyneema® SK78, characterized by a remarkable stability under constant loads, provides the following features: low creep and elongation, elevated breaking load, light weight, low level of water absorption, high resistance to UV rays, great flexibility. Furthermore, the Shield treatment increases the compactness and the abrasion resistance of this rope.
The ropes made with this core are destined to extreme performances, especially during highly demanding regattas when the permanent load is continuously present.

NEW

Dyneema® SK78 SHIELD

This Line of ropes differs from the previous version Dyneema® SK78 + HPS + SHIELD in the lack of the HPS treatment, which means that there is no thermic pre-stretching under load.
This makes the rope more manageable, as the core is more supple. It has a slightly different breaking load and elongation in comparison with DYN 78 + HPS + SHIELD, because the braid is not settled (it means that the differences of tensions between fibers are not adjusted). However, its general features remain at a high level, making this rope affordable to boats and crews of a less extreme technical level.

Dyneema® DM20
/ Features

The result of the comparison of Dyneema® DM20, SK99, SK78 and SK75 in identical physical and environmental conditions shows the better performance of DM20 in terms of durability over time as well as a close to zero creep.

ARMARE DYNEFORCE TYPES COMPARISON

	Dyneema® DM20	Dyneema® SK99	Dyneema® SK78	Dyneema® SK75
Creep	zero	••	•	•••
Elongation	•	•	•	•
Endurance life	•••••	••••	•••••	••••
Rope weight in comparison with B.L.	••••••	•••	•••••	•••••
Strenght	••••	••••••	•••••	•••••

Characteristics as the about to zero creep, main feature of **Dyneema® DM20** enhanced by the very stable single braid construction as well as by the specific polyurethane coating and HPS treatment (heat pre-stretch treatment) allow Armare to produce a rope that is suitable for all those applications where a constant load and a continued use would put to the test any other type of Dyneema®.

CREEP ELONGATION / DM20 (MAX TECHNOLOGY) VERSUS SK75 - SK78 FIBER

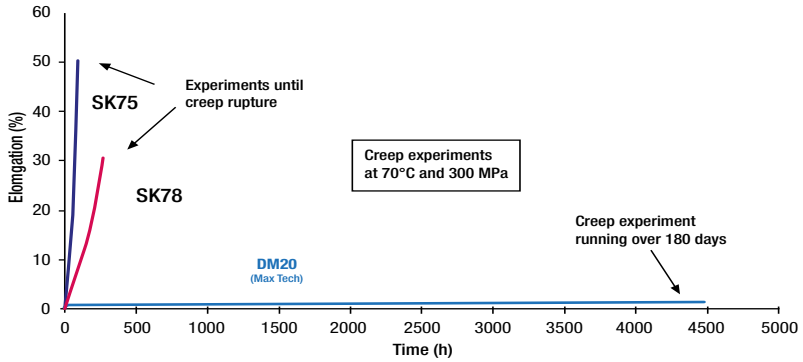

Dyneforce Comparison
/ Shield vs Standard

First and foremost we highlight that the test shown below has been performed in-house on two items, produced by Armare, having equal diameters and identical constructions. The results obtained at the bending fatigue test, both the ropes have been submitted to, complete the chart of technical characteristics and are extremely interesting for both, designers and professional riggers who wish to recommend and supply high-performance products to their customers.

BENDING FATIGUE TEST COMPARISON / DYNEFORCE SK78 VS DYNEFORCE SK78 SHIELD

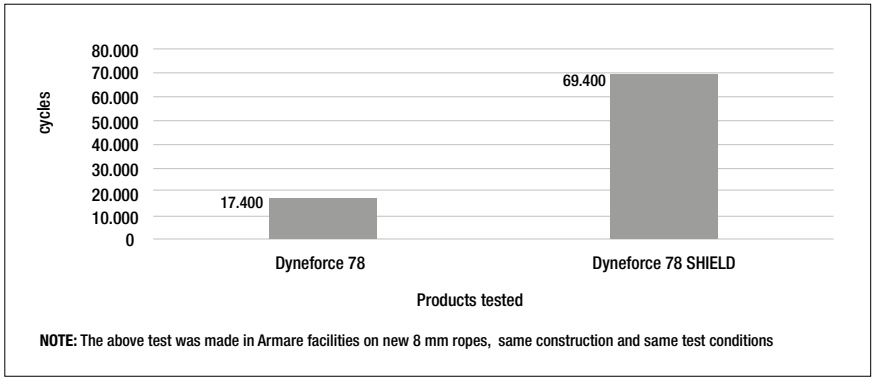

NOTE: The above test was made in Armare facilities on new 8 mm ropes, same construction and same test conditions

Thanks to the "Shield" treatment we can guarantee high resistance to bending and on top of that, added to characteristics like high breaking load, high modulus, low creep, high resistance to UV rays and last but not least a very low specific weight, these ropes are the best alternative to traditional wire ropes used in the marine industry and beyond.

Single Braid SHIELD

SINGLE BRAIDS + SHIELD - BREAKING LOAD AND WEIGHT COMPARATIVE TABLE

Ø	DYNEFORCE DM20 SHIELD SINGLE BRAID		DYNEFORCE 99 SHIELD SINGLE BRAID		DYNEFORCE 78 SHIELD SINGLE BRAID		SUPEROUND 78 SHIELD SINGLE BRAID	
	NA25S_C00		NA20S_C00		NA58S_C00		NA17S_C00	
DIAMETER	B. L.	WEIGHT	B. L.	WEIGHT	B. L.	WEIGHT	B. L.	WEIGHT
[mm]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]
3	**1.237**	4,90	**1.516**	6,08	**1.455**	4,95	**966**	5,05
3,5	**1.465**	7,12	**2.310**	9,73	**1.724**	8,28	**1.071**	7,58
4	**2.008**	9,28	**2.940**	11,31	**2.363**	10,20	**1.680**	9,90
5	**2.755**	14,06	**4.496**	18,23	**3.241**	15,45	**2.940**	15,10
6	**4.458**	19,76	**6.510**	23,09	**5.245**	24,24	**4.305**	20,20
7	**5.712**	27,90	**8.484**	27,78	**6.720**	31,41	**6.405**	27,27
8	**6.605**	35,86	**10.328**	39,19	**7.770**	38,59	**7.508**	35,35
9	**8.672**	42,95	**13.068**	48,62	**10.202**	51,62	**8.505**	46,46
10	**10.353**	50,00	**15.414**	59,39	**12.180**	60,61	**10.710**	57,58
11	**11.692**	62,50	**17.320**	62,63	**13.755**	77,78	**12.705**	61,62
12	**14.280**	75,80	**19.131**	77,78	**16.800**	94,95	**15.960**	68,69
13	**15.869**	100,60	**23.286**	96,18	**18.669**	111,11	**17.535**	73,74
14	**17.850**	106,30	**27.384**	111,11	**21.000**	129,29	**18.743**	78,79
15	**20.528**	112,80	**31.500**	130,30	**24.150**	145,45	**21.525**	90,91
16	**23.473**	119,25	**38.850**	146,46	**27.615**	161,62	**23.100**	103,03
17	**25.883**	139,70	**41.937**	164,20	**30.450**	181,87	**24.780**	115,20
18	**28.025**	160,10	**44.835**	181,82	**32.970**	202,02	**26.250**	127,27
19	**29.988**	185,10	**48.195**	199,60	**35.970**	227,09	**27.878**	144,64
20	**33.023**	210,00	**51.975**	218,00	**38.850**	252,00	**30.135**	162,00

NOTE ABOUT BREAKING LOAD AND DIAMETERS The average values shown above are derived from tests taken at Armare laboratory, on properly spliced new ropes, and may change without notice. Other diameters available on request. The static load of the rope must not exceed 20% of breaking load shown in the table. Knots may affect the breaking load of the rope with reductions of up to 60%. The splicing increases the diameter of the rope of about 1.5 times. The use and exposure to weather conditions, depending from the kind of rope and the time of exposure, can reduce the breaking loads of the ropes.

Dyneforce DM20 SHIELD

Single Braid

PRODUCT CODE NA25S_C00

CONSTRUCTION 12 plait with Dyneema® DM20 impregnated with SHIELD coating and special heat treatment HPS.

USE It is the ultimate solution for strops, shrounds, backstays and halyards on hydraulic cylinder but also for stable and long-lasting bindings.

STANDARD DIAMETERS From 3 to 20 mm.

STRETCH AT 30% B. L. 2,16%
STRETCH AT B. L. 3,20%

COLOURS Silver Grey.

Silver Grey

Dyneforce 99 SHIELD

Single Braid

PRODUCT CODE NA20S_C00

CONSTRUCTION 12 plait with Dyneema® SK99 impregnated with SHIELD coating and special heat treatment HPS.

USE Ideal for tackles, backstays, runners, baby stays, halyards on hydraulic cylinders, strops and loops; moreover for bindings where high breaking load, low elongation and minimal amount of space are required.

STANDARD DIAMETERS From 3 to 20 mm.

STRETCH AT 30% B. L. 1,65%
STRETCH AT B. L. 2,80%

COLOURS Black, Silver Grey.

Black

Silver Grey

Dyneforce 78 SHIELD

Single Braid

PRODUCT CODE NA58S_C00

CONSTRUCTION 12 plait with Dyneema® SK78 impregnated with SHIELD coating and special heat treatment HPS.

USE Ideal for tackles, backstays, runners, baby stays, control lines, strops and loops; moreover for bindings where a good breaking load and a low elongation are required.

STANDARD DIAMETERS From 3 to 20 mm.

STRETCH AT 30% B. L. 2,10%
STRETCH AT B. L. 3,15%

COLOURS Black, Silver Grey.

Black

Silver Grey

Superound 78 SHIELD

Single Braid

PRODUCT CODE NA17S_C00

CONSTRUCTION 12 plait with Dyneema® SK78 impregnated with SHIELD coating.

USE Ideal for bindings, leading blocks, control lines and tackles.

STANDARD DIAMETERS From 3 to 20 mm.

STRETCH AT 30% B. L. 2,55%
STRETCH AT B. L. 3,55%

COLOURS Black, Silver Grey.

Black

Silver Grey

Covers

SIX HIGH PERFORMACE COVERS COMPLETE AND ENHANCE ARMARE'S ENDURANCE LINE. THEY ARE MADE OF THE MOST SOPHISTICATED FIBERS AND HAVE BEEN DEVELOPED AND TESTED ON THE MOST PRESTIGIOUS RACING BOATS WORLDWIDE

Available Covers

PBO - Zylon®

PBO

Unbeatable resistance to abrasion and heat. Thanks to its properties, it is the best choice among the range of technical ropes in the applications where high temperatures and elevated loads are constantly present.

NEW

PBO - Zylon® / Black Dyneema®

PBO / CDYN

Technical cover indicated for all the maneuvers in which it is useful to reduce the high grip typical of PBO-Zylon®, through the mix with Dyneema®, which gives the rope greater fluidity. The cover maintains a good resistance to high temperatures (PBO melting temperature 650 °C) and so it is particularly suitable for jib sheets and running backstay on extreme performance boats. If necessary, the addition of a small percentage of polyester allows to diversify the manoeuvres.

NEW

PBO - Zylon® / Black Technora®

PBO / BTEC

First rate resistance to abrasion and high temperature Thanks to the balance of two excellent fibers its properties are perfect for the intensive uses onboard of the competitive racing yachts.

NEW

PBO - Zylon® / Black Technora® / Black Dyneema®

PBO / BTEC / CDYN

This technical cover is extremely resistant to both high temperatures and abrasions, and so it is particularly suitable for “endurance” use, with repeated stress over time; the addition of Dyneema® gives the rope a good fluidity and makes it suitable for sheets and tack of ocean boats. If necessary, the addition of a small percentage of polyester allows to diversify the manoeuvres.

NEW

Black Technora®/ Black Dyneema®

BTEC / CDYN

The mixture of these fibres has been carefully studied to be fairly distributed in order to make them take advantage of their mutual characteristics, both in terms of durability and performance. Excellent results in order of smoothness, abrasion resistance and durability have been reached.
The presence of Pure Black Dyneema® gives this cover a solid black colour, accordant to the needs of the top racing yachts.

NEW

Black Technora®/ Black Dyneema®/ Polyester

BTEC / CDYN / PET

This item is suitable for many different boats and uses because of its excellent resistance to abrasion and to repeated bending. Compared to TEC/DYN covers, it is easier to customize thanks to the presence of Polyester and it even becomes more recognizable in the distinction of the different manoeuvres. Furthermore, the use of the Pure Black Dyneema® gives this cover a solid black colour, accordant to the needs of the top racing yachts.

Endurance Covers

SHIELD TREATMENT

PBO Zylon®

PBO (C56)

DESCRIPTION AND USE:
This cover is especially used for runner tackles, high friction/load sheets and also for hi-loads takles.

PBO Zylon® / Black Dyneema®

NEW

PBO / CDYN (C56_CDY)

DESCRIPTION AND USE:
The best choice to protect sophisticated cores in a super technical running system, where high loads are the main stress for the rope.

DM20 HPS SHIELD - BREAKING LOAD AND WEIGHT COMPARATIVE TABLE *

Ø	FOR ALL COVERS	PBO	PBO/ CDYN	PBO/ BTEC	PBO/BTEC/ CDYN	BTEC/CDYN	BTEC/CDYN/ PET
	NA25S	C56	C56_CDY	C74	C75_CDY	C35_CDY	C85_CDY
DIAM	B. L.	WEIGHT	WEIGHT	WEIGHT	WEIGHT	WEIGHT	WEIGHT
[mm]	[daN]	[g /m]	[g /m]	[g /m]	[g /m]	[g /m]	[g /m]
4	**848**	13,72	12,70	12,80	12,70	12,52	12,30
5	**1.237**	21,28	19,60	19,80	19,60	19,19	19,00
6	**2.008**	29,05	26,80	27,00	26,80	26,50	26,16
7	**2.382**	42,44	39,10	39,50	39,10	38,22	38,22
8	**2.755**	55,62	51,30	51,80	51,30	50,80	50,08
9	**4.458**	67,55	61,80	62,40	61,80	61,30	60,37
10	**5.087**	79,38	73,10	73,80	73,10	72,50	71,34
11	**6.158**	97,20	89,60	90,50	89,60	88,80	87,51
12	**7.631**	112,86	104,00	105,00	104,00	103,10	101,53
13	**8.672**	132,18	121,77	123,00	121,77	121,00	119,00
14	**9.014**	151,85	139,90	141,20	139,90	138,70	136,51
15	**10.353**	176,53	162,65	164,20	162,65	161,25	158,76
16	**11.692**	201,20	185,40	187,20	185,40	183,80	181,00
17	**12.941**	219,12	202,00	203,92	202,00	200,20	197,80
18	**14.280**	236,95	218,40	220,50	218,40	216,50	213,15
19	**15.869**	265,78	245,70	248,64	245,60	243,55	239,81
20	**17.850**	294,60	273,00	276,77	272,80	270,60	266,46

DYN 99 HPS SHIELD - BREAKING LOAD AND WEIGHT COMPARATIVE TABLE *

Ø	FOR ALL COVERS	PBO	PBO/ CDYN	PBO/ BTEC	PBO/BTEC/ CDYN	BTEC/CDYN	BTEC/CDYN/ PET
	NA20S	C56	C56_CDY	C74	C75_CDY	C35_CDY	C85_CDY
DIAM	B. L.	WEIGHT	WEIGHT	WEIGHT	WEIGHT	WEIGHT	WEIGHT
[mm]	[daN]	[g /m]	[g /m]	[g /m]	[g /m]	[g /m]	[g /m]
4	**1.516**	13,82	12,83	12,93	12,42	12,55	12,42
5	**2.310**	21,49	19,80	20,00	19,19	19,38	19,19
6	**2.940**	29,34	27,07	27,27	26,23	26,77	26,23
7	**3.675**	42,87	39,49	39,90	38,60	39,19	38,60
8	**4.496**	56,18	51,81	52,32	50,58	51,31	50,58
9	**6.510**	67,74	62,42	63,02	60,97	61,91	60,97
10	**7.508**	80,17	73,83	74,54	72,05	73,23	72,05
11	**9.398**	98,17	90,50	91,41	88,39	89,69	88,39
12	**10.328**	113,99	105,04	106,05	102,55	104,13	102,55
13	**10.710**	133,68	123,17	124,33	120,38	122,11	120,38
14	**13.068**	153,37	141,30	142,61	138,21	140,09	138,21
15	**15.141**	178,29	164,28	165,84	160,51	162,86	160,51
16	**16.328**	203,22	187,25	189,07	182,81	185,64	182,81
17	**17.320**	221,27	203,98	205,97	199,51	202,20	199,51
18	**19.131**	239,22	220,58	222,71	215,28	218,67	215,28
19	**23.286**	268,50	248,16	249,46	244,47	246,00	242,25
20	**27.384**	297,00	275,73	276,20	273,66	273,31	269,12

*** NOTE ABOUT BREAKING LOAD AND DIAMETERS** The average values shown above are derived from tests taken at Armare laboratory, on properly spliced new ropes, and may change without notice. Other diameters available on request. The static load of the rope must not exceed 20% of breaking load shown in the table.
Knots may affect the breaking load of the rope with reductions of up to 60%. The splicing increases the diameter of the rope of about 1.5 times. The use and exposure to weather conditions, depending from the kind of rope and the time of exposure, can reduce the breaking loads of the ropes.

PBO Zylon® / Black Technora®

NEW

PBO / BTEC (C74)

DESCRIPTION AND USE:
High loads don't scare this rope and it's a good solution for afterguys and runner sheets.

PBO Zylon® / Black Technora® / Black Dyneema®

NEW

PBO / BTEC / CDYN (C75_CDY)

DESCRIPTION AND USE:
Endurance is a must-have for the use on spinnaker/ gennaker, runner tails.

Black Technora® / Black Dyneema®

NEW

BTEC / CDYN (C35_CDY)

DESCRIPTION AND USE:
Ideal for high fatigue manoeuvres and repeated mechanical stress, in particular where the wear of the cover is steadily present e.g. jib sheets, tacklines and staysail sheets.

Black Technora® / Black Dyneema® / Polyester

NEW

BTEC / CDYN / PET (C85_CDY)

DESCRIPTION AND USE:
Ideal for jib and gennaker sheets, halyard and control lines.

DYN 78 HPS SHIELD - BREAKING LOAD AND WEIGHT COMPARATIVE TABLE *

Ø	FOR ALL COVERS	PBO	PBO/ CDYN	PBO/ BTEC	PBO/BTEC/ CDYN	BTEC/CDYN	BTEC/CDYN/ PET
	NA58S	C56	C56_CDY	C74	C75_CDY	C35_CDY	C85_CDY
DIAM	B. L.	WEIGHT	WEIGHT	WEIGHT	WEIGHT	WEIGHT	WEIGHT
[mm]	[daN]	[g /m]	[g /m]	[g /m]	[g /m]	[g /m]	[g /m]
4	**998**	13,72	12,70	12,80	12,70	12,52	12,30
5	**1.455**	21,28	19,60	19,80	19,60	19,19	19,00
6	**2.363**	29,05	26,80	27,00	26,80	26,50	26,16
7	**2.802**	42,44	39,10	39,50	39,10	38,22	38,22
8	**3.241**	55,62	51,30	51,80	51,30	50,80	50,08
9	**5.245**	67,60	61,80	62,40	61,80	61,30	60,37
10	**5.985**	79,38	73,10	73,80	73,10	72,50	71,34
11	**7.245**	97,20	89,60	90,50	89,60	88,80	87,51
12	**8.978**	112,86	104,00	105,00	104,00	103,10	101,53
13	**10.202**	132,18	121,77	123,00	121,77	121,00	119,00
14	**10.605**	151,85	139,90	141,20	139,90	138,70	136,51
15	**12.180**	176,53	162,65	164,20	162,65	161,25	158,76
16	**13.755**	201,20	185,40	187,20	185,40	183,80	181,00
17	**15.225**	219,11	202,00	203,90	202,00	200,20	197,80
18	**16.800**	236,95	218,40	220,50	218,40	216,50	213,15
19	**18.669**	265,78	245,70	248,64	245,60	243,55	239,81
20	**21.000**	294,60	273,00	276,77	272,80	270,60	266,46

DYN 78 SHIELD - BREAKING LOAD AND WEIGHT COMPARATIVE TABLE *

Ø	FOR ALL COVERS	PBO	PBO/ CDYN	PBO/ BTEC	PBO/BTEC/ CDYN	BTEC/CDYN	BTEC/CDYN/ PET
	NA17S	C56	C56_CDY	C74	C75_CDY	C35_CDY	C85_CDY
DIAM	B. L.	WEIGHT	WEIGHT	WEIGHT	WEIGHT	WEIGHT	WEIGHT
[mm]	[daN]	[g /m]	[g /m]	[g /m]	[g /m]	[g /m]	[g /m]
4	**735**	13,72	12,70	12,80	12,30	12,52	12,30
5	**998**	21,38	19,70	19,90	19,30	19,29	19,30
6	**1.785**	29,05	26,80	27,00	26,17	26,50	26,17
7	**2.730**	41,93	39,00	39,10	37,80	38,25	37,70
8	**2.940**	54,65	50,40	50,90	49,20	49,90	49,20
9	**4.305**	65,92	60,80	61,40	59,33	60,20	59,30
10	**5.744**	77,11	71,10	71,80	69,38	70,40	69,38
11	**6.405**	93,94	86,60	87,44	84,50	85,75	84,50
12	**6.890**	110,70	102,00	103,00	99,57	101,10	99,57
13	**8.505**	130,15	120,10	121,15	117,10	118,90	117,00
14	**9.608**	149,58	137,80	139,20	134,55	136,60	134,55
15	**11.550**	168,72	155,45	157,00	151,80	154,10	151,80
16	**12.705**	187,81	173,00	174,70	168,95	171,50	168,95
17	**14.312**	213,26	181,30	183,10	177,10	180,00	177,00
18	**15.960**	226,23	189,50	191,40	185,02	187,90	185,02
19	**17.535**	239,20	221,14	223,78	221,00	219,20	215,83
20	**18.743**	265,14	245,70	249,10	245,52	243,54	239,82

Super Yacht line

HALYARDS AND SHEETS, MADE BY THE MOST ADVANCED FIBRES AND TAPERED ON REQUEST, AND A SPECIFIC CAPTIVE WINCH LINE, CONSTITUTE THE BIG RANGE OF PRODUCTS FOR SAIL SUPER YACHTS.

SINGLE BRAIDS

Dyneforce 99
Treatments: HPS / PU

Dyneforce 78
Treatments: HPS / PU

AVAILABLE CORES

Dyneema® SK99
Treatments: HPS / PU

Dyneema® SK78
Treatments: HPS / PU

AVAILABLE COVERS

Black Technora®
Dyneema®
BTEC / DYN

Black Technora®
Dyneema®
Polyester
BTEC / DYN / PET

Black Technora®
Polyester
BTEC / PET

Kevlar®
Dyneema®
Polyester
KEV / DYN / PET

Cordura® + Polyester
CRD / PET

Polyester
PET

AVAILABLE TREATMENT

CAPTIVE TREATMENT

Captive Winch Rope

Thanks to the cooperation with leader companies in the production of Captive Winch and the supply to prestigious Super Yachts, Armare has improved and reached high performance levels also in this range of products. Thousands of meters provided to the most important companies specialized in the “rigging works” and well-known shipyards, prove, more than many words, the steady growth and the care of Armare in the research of new solutions,
in order to solve problems linked to this specific use.

Captive Winch products preserve high breaking loads and low elongation thanks to the use of high modulus fibres.

Moreover, they hold the essential characteristics necessary to grant the good working of a Captive Winch System like flexibility, a steady shape, no sliding between core and cover, high abrasion resistance and excellent behaviour between sliding and grip on drums. The choice can be made among five different types of covers. Each one has diverse characteristics suitable for different types of winches and yachts they will be settled on (more information at page 40).

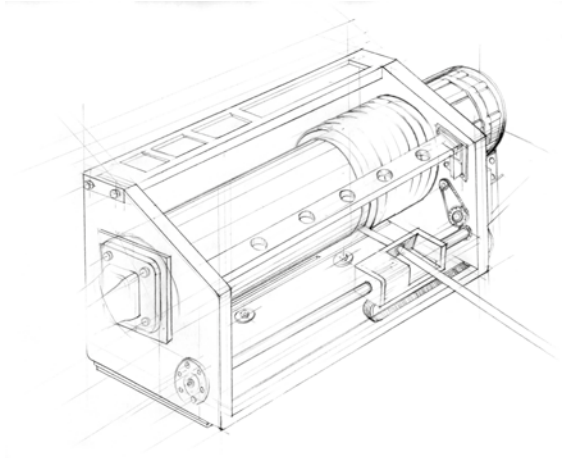

Rope with Captive treatment

The rope with Captive treatment is linear and compact; core and cover perfectly fit together.

Rope without Captive treatment

The rope without Captive Treatment could show a progressive “slack” that accumulates gradually and may cause damage to the cover.

Available Cores

Dyneema® SK99

100% SK99 · HPS TREATMENT · PU COATED TREATMENT

Treatments: HPS / PU

Dyneema® SK99 delivers the highest tenacity available in a light weight polymer fiber. Indeed, compared to Dyneema® SK78, it shows a 20% increase on tenacity and a 35% higher modulus. Dyneema® SK99 appears thinner and lighter weight respect to ropes with the same diameter, but with a significant increase in strength, which entails an increase on performance and a better response of the boat. Other features: low water absorption, high UV resistance, minimal elongation and good flexibility.

Dyneema® SK78

100% SK78 · HPS TREATMENT · PU COATED TREATMENT

Treatments: HPS / PU

The High Modulus fiber Dyneema® SK78, characterized by a remarkable stability under constant loads, provides the following features: low creep, elevated breaking load, low elongation, light weight, low level of water absorption, high resistance to UV rays and abrasion, great flexibility, high resistance to cutting. The ropes made with Dyneema® SK78 + HPS + PU are therefore destined to extreme performances, especially during highly demanding regattas when the permanent load is continuously present.

Available Covers

Black Technora® / Dyneema®

BTEC / DYN

The mixture of these fibres has been carefully studied to be fairly distributed in order to make them take advantage of their mutual characteristics, both in terms of durability and performance. Excellent results in order of smoothness, abrasion resistance and durability have been reached.

Black Technora® / Dyneema® / Polyester

BTEC / DYN / PET

This item is suitable for many different boats and uses because of its excellent resistance to abrasion and to repeated bending. Compared to TEC/DYN covers, it is easier to customize thanks to the presence of Polyester and it even becomes more recognizable in the distinction of the different manoeuvres.

Black Technora® / Polyester

BTEC / PET

It combines high level functional characteristics, with UV and abrasion resistance as well as a good grip. Thanks to the mixture among the Black Technora® and the different Polyester colours, the look is also winning.

Kevlar®/ Dyneema® / Polyester

KEV / DYN / PET

It preserves similar characteristics as its sister-cover BTEC/ DYN/PET, but thanks to the high melting point of Kevlar® it is more suitable for high speed manoeuvres and loads, where the ropes reach high temperatures. It holds one of the best grips but a lower UV resistance in comparison to Black Technora®, which is composed by special pigments that protract his life, despite of exposure to UV rays.

Cordura® / Polyester

CRD / PET

This rope stands out for its lightness and perfect grip. It has been studied to obtain an excellent grip on stoppers and winches through the use of special anti-slip fibers.

Polyester

PET

It is the most used fiber on different types of boats thanks to its good resistance to UV rays and to abrasion and for its excellent durability to atmospheric agents. Moreover, it is easy to customize and ideal to identify the different maneouvres.

DYNEEMA® SK99 + HPS + PU

DYNEEMA® SK99 + HPS + PU - BREAKING LOAD AND WEIGHT COMPARATIVE TABLE

Ø	DYNEFORCE 99 SINGLE BRAID			FOR ALL COVERS	BTEC/ DYN	BTEC/ DYN/PET	BTEC/ PET	KEV/DYN /PET	CRD/ PET	PET
	NA20C00				NA20C35	NA20C85	NA20C86	NA20C78	NA20C24	NA20C71
DIAMETER	B. L.	WEIGHT		B. L.	WEIGHT	WEIGHT	WEIGHT	WEIGHT	WEIGHT	WEIGHT
[mm]	[daN]	[g /m]		[daN]	[g /m]	[g /m]	[g /m]	[g /m]	[g /m]	[g /m]
14	**26.080**	110,00		**12.446**	140,09	138,21	141,03	138,21	135,79	137,16
15	**30.000**	129,00		**14.680**	162,86	160,51	163,79	160,51	157,88	159,48
16	**37.000**	145,00		**15.550**	185,64	182,81	186,55	182,81	179,98	181,80
17	**39.940**	162,00		**16.495**	202,19	199,08	201,92	199,08	195,98	197,96
18	**42.700**	180,00		**18.220**	218,67	215,28	219,68	215,28	211,98	214,12
20	**49.500**	216,00		**26.080**	273,31	269,12	274,62	269,12	264,97	267,65
22	**63.500**	278,00		**37.000**	314,19	311,08	319,16	307,97	307,97	311,08
24	**68.900**	330,00		**42.700**	372,34	368,65	378,25	364,96	364,96	368,65
26	**83.460**	355,00		**49.500**	428,44	424,20	435,21	419,96	419,96	424,20
28	**91.500**	418,00		**63.500**	566,16	560,55	575,09	554,94	554,94	560,55
30	**99.920**	497,00		**68.900**	703,87	696,90	714,98	689,93	689,93	696,90
32	**108.300**	565,33		**83.460**	740,52	733,19	747,86	725,86	725,86	733,19
34	**116.800**	636,33		**91.500**	825,66	817,48	833,83	809,31	809,31	817,48
36	**-**	-		**99.920**	910,79	901,78	919,81	892,76	892,76	901,78
38	**-**	-		**108.300**	995,93	986,07	1.005,79	976,21	976,21	986,07
40	**-**	-		**116.800**	1.081,06	1.070,36	1.091,77	1.059,66	1.059,66	1.070,36

NOTE ABOUT BREAKING LOAD AND DIAMETERS The average values shown above are derived from tests taken at Armare laboratory, on properly spliced new ropes, and may change without notice. Other diameters available on request. The static load of the rope must not exceed 20% of breaking load shown in the table. Knots may affect the breaking load of the rope with reductions of up to 60%. The splicing increases the diameter of the rope of about 1.5 times. The use and exposure to weather conditions, depending from the kind of rope and the time of exposure, can reduce the breaking loads of the ropes.

DYNEFORCE 99 Single Braid

PRODUCT CODE NA20C00

100% SK99 · HPS TREATMENT · PU COATED TREATMENT

CONSTRUCTION 12 plait with Dyneema® SK99 impregnated with polyurethane coating and special heat treatment HPS.

USE Ideal for tackles, backstays, runners, baby stays, halyards on hydraulic cylinders, strops and loops; moreover for bindings where high breaking load, low elongation and taking up a minimal amount of space are required.

STANDARD DIAMETERS
From 14 to 34 mm
Other diameters on request

STRETCH AT 30% B. L. 1,70%
STRETCH AT B. L. 2,86%

COLOURS

White

Black

Silver Grey

SK99 - BTEC / DYN

PRODUCT CODE NA20C35

100% SK99 · HPS TREATMENT · PU COATED TREATMENT

COVER Black Technora® / Dyneema®

CORE 12 plait with Dyneema® SK99 impregnated with polyurethane coating and special heat treatment HPS.

USE Ideal for high fatigue manoeuvres and repeated mechanical stress, in particular where the wear of the cover is steadily present e.g. jib sheets, tacklines and staysail sheets.

STANDARD DIAMETERS
From 14 to 40 mm
Other diameters on request

STRETCH AT 30% B. L. 1,70%
STRETCH AT B. L. 2,86%

COLOURS Melange Natural Black Technora® / Dyneema®

BTEC / DYN

SK99 - BTEC / DYN / PET

PRODUCT CODE NA20C85

100% SK99 | HPS TREATMENT | PU COATED TREATMENT

COVER Black Technora® / Dyneema® / Polyester

CORE 12 plait with Dyneema® SK99 impregnated with polyurethane coating and special heat treatment HPS.

USE It's simple to control and to release on winches. Ideal for jib and gennaker sheets, halyards and control lines.

STANDARD DIAMETERS
From 14 to 40 mm
Other diameters on request

STRETCH AT 30% B. L. 1,70%
STRETCH AT B. L. 2,86%

COLOURS Melange Black Technora® / Dyneema® / Polyester to choose from:

SK99 - BTEC / PET

PRODUCT CODE NA20C86

100% SK99 | HPS TREATMENT | PU COATED TREATMENT

COVER Black Technora® / Polyester

CORE 12 plait with Dyneema® SK99 impregnated with polyurethane coating and special heat treatment HPS.

USE This rope is used on monotypes, oceanic boats and on Super Yachts as sheets and halyards with a good grip and high chafe resistance.

STANDARD DIAMETERS
From 14 to 40 mm
Other diameters on request

STRETCH AT 30% B. L. 1,70%
STRETCH AT B. L. 2,86%

COLOURS Melange Black Technora® / Polyester to choose from:

SK99 - KEV / DYN / PET

PRODUCT CODE NA20C78

100% SK99 | HPS TREATMENT | PU COATED TREATMENT

COVER Kevlar® / Dyneema® / Polyester

CORE 12 plait with Dyneema® SK99 impregnated with polyurethane coating and special heat treatment HPS.

USE Ideal for manoeuvres of high fatigue and cyclical mechanical stress e.g. jib sheets, tacklines and staysail sheets.

STANDARD DIAMETERS
From 14 to 40 mm
Other diameters on request

STRETCH AT 30% B. L. 1,70%
STRETCH AT B. L. 2,86%

COLOURS Melange Kevlar® / Dyneema® / Polyester to choose from:

SK99 - CRD / PET

PRODUCT CODE NA20C24

100% SK99 | HPS TREATMENT | PU COATED TREATMENT

COVER Cordura® / Polyester

CORE 12 plait with Dyneema® SK99 impregnated with polyurethane coating and special heat treatment HPS.

USE Excellent grip on stopper and winch. It can be chosen either as halyard, as sheet and for all control lines thanks to its soft and grip touch.

STANDARD DIAMETERS
From 14 to 40 mm
Other diameters on request

STRETCH AT 30% B. L. 1,70%
STRETCH AT B. L. 2,86%

COLOURS Melange Cordura® / Polyester to choose from:

SK99 - PET

PRODUCT CODE NA20C71

100% SK99 | HPS TREATMENT | PU COATED TREATMENT

COVER Polyester

CORE 12 plait with Dyneema® SK99 impregnated with polyurethane coating and special heat treatment HPS.

USE Indicated for multiple uses: sheets, halyards and general running rigging.

STANDARD DIAMETERS
From 14 to 40 mm
Other diameters on request

STRETCH AT 30% B. L. 1,70%
STRETCH AT B. L. 2,86%

COLOURS

DYNEEMA® SK78 + HPS + PU

DYNEEMA® SK78 + HPS + PU - BREAKING LOAD AND WEIGHT COMPARATIVE TABLE

Ø	DYNEFORCE 78 SINGLE BRAID			FOR ALL COVERS	BTEC/ DYN	BTEC/ DYN/PET	BTEC/ PET	KEV/ DYN/PET	CRD/ PET	PET
	NA58C00				NA58C35	NA58C85	NA58C86	NA58C78	NA58C24	NA58C71
DIAMETER	B. L.	WEIGHT		B. L.	WEIGHT	WEIGHT	WEIGHT	WEIGHT	WEIGHT	WEIGHT
[mm]	[daN]	[g /m]		[daN]	[g /m]	[g /m]	[g /m]	[g /m]	[g /m]	[g /m]
14	**20.000**	128,00		**10.100**	138,70	136,51	139,30	136,51	134,44	148,40
15	**23.000**	145,00		**11.600**	161,25	158,76	162,00	158,76	156,32	164,20
16	**26.300**	160,00		**13.100**	183,80	181,00	184,70	181,00	178,20	180,00
17	**29.000**	180,00		**14.500**	200,15	197,08	201,10	197,08	194,05	196,00
18	**31.400**	200,00		**16.000**	216,50	213,15	217,50	213,15	209,90	212,00
20	**37.000**	250,00		**20.000**	270,60	266,46	271,90	266,46	262,35	265,00
22	**44.000**	300,00		**26.300**	311,08	299,00	316,00	299,00	304,92	308,00
24	**50.500**	350,00		**31.400**	368,65	374,50	374,50	374,50	361,35	365,00
26	**56.200**	380,00		**34.300**	424,20	430,90	430,90	430,90	415,80	420,00
28	**65.000**	430,00		**44.000**	560,55	569,40	569,40	569,40	549,45	556,00
30	**72.900**	475,00		**50.500**	696,90	707,90	707,90	707,90	683,10	690,00
32	**80.000**	526,00		**56.200**	833,25	948,75	841,50	948,75	816,75	825,00
34	**87.000**	578,00		**65.000**	937,28	997,90	946,56	928,00	918,72	928,00
36	**-**	-		**72.900**	1.057,47	1.047,00	1.067,94	1.047,00	1.036,53	1.047,00
38	**-**	-		**80.000**	1.177,66	1.166,00	1.189,32	1.166,00	1.154,34	1.166,00
40	**-**	-		**87.000**	1.297,85	1.285,00	1.310,70	1.285,00	1.272,15	1.285,00

NOTE ABOUT BREAKING LOAD AND DIAMETERS The average values shown above are derived from tests taken at Armare laboratory, on properly spliced new ropes, and may change without notice. Other diameters available on request. The static load of the rope must not exceed 20% of breaking load shown in the table. Knots may affect the breaking load of the rope with reductions of up to 60%. The splicing increases the diameter of the rope of about 1.5 times. The use and exposure to weather conditions, depending from the kind of rope and the time of exposure, can reduce the breaking loads of the ropes.

DYNEFORCE 78 Single Braid

PRODUCT CODE NA58C00

100% SK78 · HPS TREATMENT · PU COATED TREATMENT

CONSTRUCTION 12 plait with Dyneema® SK78 impregnated with polyurethane coating and special heat treatment HPS.

USE Ideal for tackles, backstays, runners, baby stays, control lines, strops and loops; moreover for lashings where a good breaking load and a low elongation are required.

STANDARD DIAMETERS
From 14 to 34 mm
Other diameters on request

STRETCH AT 30% B. L. 2,16%
STRETCH AT B. L. 3,20%

COLOURS

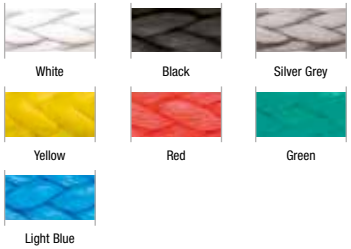

SK78 - BTEC / DYN

PRODUCT CODE NA58C35

100% SK78 · HPS TREATMENT · PU COATED TREATMENT

COVER Black Technora® / Dyneema®

CORE 12 plait with Dyneema® SK78 impregnated with polyurethane coating and special heat treatment HPS.

USE Ideal for high fatigue manoeuvres and repeated mechanical stress, in particular where the wear of the cover is steadily present e.g. jib sheets, tacklines and staysail sheets.

STANDARD DIAMETERS
From 14 to 40 mm
Other diameters on request

STRETCH AT 30% B. L. 2,16%
STRETCH AT B. L. 3,20%

COLOURS Melange Natural Black Technora® / Dyneema®.

SK78 - BTEC / DYN / PET

PRODUCT CODE NA58C85

100% SK78 · HPS TREATMENT · PU COATED TREATMENT

COVER Black Technora® / Dyneema® / Polyester

CORE 12 plait with Dyneema® SK78 impregnated with polyurethane coating and special heat treatment HPS.

USE It's simple to control and to release on winches. Ideal for jib and gennaker sheets, halyards and control lines.

STANDARD DIAMETERS
From 14 to 40 mm
Other diameters on request

STRETCH AT 30% B. L. 2,16%
STRETCH AT B. L. 3,20%

COLOURS Melange Black Technora® / Dyneema® / Polyester to choose from:

SK78 - BTEC / PET

PRODUCT CODE NA58C86



100% SK78 · HPS TREATMENT · PU COATED TREATMENT

COVER Black Technora® / Polyester

CORE 12 plait with Dyneema® SK78 impregnated with polyurethane coating and special heat treatment HPS.

USE This rope is used on monotypes, oceanic boats and on Super Yachts as sheets and halyards with a good grip and high chafe resistance.

STANDARD DIAMETERS
From 14 to 40 mm
Other diameters on request

STRETCH AT 30% B. L. 2,16%
STRETCH AT B. L. 3,20%

COLOURS Melange Black Technora® / Polyester to choose from:

SK78 - KEV / DYN / PET

PRODUCT CODE NA58C78

100% SK78 · HPS TREATMENT · PU COATED TREATMENT

COVER Kevlar® / Dyneema® / Polyester

CORE 12 plait with Dyneema® SK78 impregnated with polyurethane coating and special heat treatment HPS.

USE Ideal for manoeuvres of high fatigue and cyclical mechanical stress e.g. jib sheets, tacklines and staysail sheets.

STANDARD DIAMETERS
From 14 to 40 mm
Other diameters on request

STRETCH AT 30% B. L. 2,16%
STRETCH AT B. L. 3,20%

COLOURS Melange Kevlar® / Dyneema® / Polyester to choose from:

SK78 - CRD / PET

PRODUCT CODE NA58C24

100% SK78 · HPS TREATMENT · PU COATED TREATMENT

COVER Cordura® / Polyester

CORE 12 plait with Dyneema® SK78 impregnated with polyurethane coating and special heat treatment HPS.

USE Excellent grip on stopper and winch. It can be chosen either as halyard, as sheet and for all control lines thanks to its soft and grip touch.

STANDARD DIAMETERS
From 14 to 40 mm
Other diameters on request

STRETCH AT 30% B. L. 2,16%
STRETCH AT B. L. 3,20%

COLOURS Melange Cordura® / Polyester to choose from:

SK78 - PET

PRODUCT CODE NA58C71

100% SK78 · HPS TREATMENT · PU COATED TREATMENT

COVER Polyester

CORE 12 plait with Dyneema® SK78 impregnated with polyurethane coating and special heat treatment HPS.

USE Indicated for multiple uses: sheets, halyards and general running rigging.

STANDARD DIAMETERS
From 14 to 40 mm
Other diameters on request

STRETCH AT 30% B. L. 2,16%
STRETCH AT B. L. 3,20%

COLOURS

DYNEEMA® SK78 + HPS + PU + CAPTIVE

CAPTIVE TREATMENT

DYNEEMA® SK78 + HPS + PU + Captive Treatment - BREAKING LOAD AND WEIGHT COMPARATIVE TABLE

Ø	FOR ALL COVERS	BTEC/ DYN	BTEC/ DYN/PET	BTEC/ PET	CRD/ PET	PET
		NA58C35_CW	NA58C85_CW	NA58C86_CW	NA58C24_CW	NA58C71_CW
DIAMETER	B. L.	WEIGHT	WEIGHT	WEIGHT	WEIGHT	WEIGHT
[mm]	[daN]	[g /m]	[g /m]	[g /m]	[g /m]	[g /m]
14	**10.100**	138,70	136,51	139,30	134,44	148,40
15	**11.600**	161,25	158,76	162,00	156,32	164,20
16	**13.100**	183,80	181,00	184,70	178,20	180,00
17	**14.500**	200,15	197,08	201,10	194,05	196,00
18	**16.000**	216,50	213,15	217,50	209,90	212,00
20	**20.000**	270,60	266,46	271,90	262,35	265,00
22	**26.300**	311,08	299,00	316,00	304,92	308,00
24	**31.400**	368,65	374,50	374,50	361,35	365,00
26	**34.300**	424,20	430,90	430,90	415,80	420,00
28	**44.000**	560,55	569,40	569,40	549,45	556,00
30	**50.500**	696,90	707,90	707,90	683,10	690,00
32	**56.200**	833,25	948,75	841,50	816,75	825,00
34	**65.000**	937,28	997,90	946,56	918,72	928,00
36	**72.900**	-	-	-	-	-
38	**80.000**	-	-	-	-	-
40	**87.000**	-	-	-	-	-

Note: Intermediate diameters on request

NOTE ABOUT BREAKING LOAD AND DIAMETERS The average values shown above are derived from tests taken at Armare laboratory, on properly spliced new ropes, and may change without notice. Other diameters available on request. The static load of the rope must not exceed 20% of breaking load shown in the table. Knots may affect the breaking load of the rope with reductions of up to 60%. The splicing increases the diameter of the rope of about 1.5 times. The use and exposure to weather conditions, depending from the kind of rope and the time of exposure, can reduce the breaking loads of the ropes.

SK78 - BTEC / DYN

PRODUCT CODE NA58C35_CW



100% SK78 · HPS TREATMENT · PU COATED TREATMENT · CAPTIVE TREATMENT

COVER
Black Technora® / Dyneema® +
Captive treatment

CORE 12 plait with Dyneema® SK78 impregnated with polyurethane coating and special heat treatment HPS.

STANDARD DIAMETERS
From 14 to 40 mm
Other diameters on request

STRETCH AT 30% B. L. 2,16%
STRETCH AT B. L. 3,20%

COLOURS Melange Natural Black Technora® / Dyneema®.

BTEC / DYN

SK78 - BTEC / DYN / PET

PRODUCT CODE NA58C85_CW

100% SK78 · HPS TREATMENT · PU COATED TREATMENT · CAPTIVE TREATMENT

COVER
Black Technora® / Dyneema® / Polyester +
Captive treatment

CORE 12 plait with Dyneema® SK78 impregnated with polyurethane coating and special heat treatment HPS.

STANDARD DIAMETERS
From 14 to 40 mm
Other diameters on request

STRETCH AT 30% B. L. 2,16%
STRETCH AT B. L. 3,20%

COLOURS Melange Black Technora® / Dyneema® / Polyester to choose from:

SK78 - BTEC / PET

PRODUCT CODE NA58C86_CW



100% SK78 · HPS TREATMENT · PU COATED TREATMENT · CAPTIVE TREATMENT

COVER
Black Technora® / Polyester +
Captive treatment

CORE 12 plait with Dyneema® SK78 impregnated with polyurethane coating and special heat treatment HPS.

STANDARD DIAMETERS
From 14 to 40 mm
Other diameters on request

STRETCH AT 30% B. L. 2,16%
STRETCH AT B. L. 3,20%

COLOURS Melange Black Technora® / Polyester to choose from:

SK78 - CRD / PET

PRODUCT CODE NA58C24_CW

100% SK78 · HPS TREATMENT · PU COATED TREATMENT · CAPTIVE TREATMENT

COVER
Cordura® / Polyester +
Captive treatment

CORE 12 plait with Dyneema® SK78 impregnated with polyurethane coating and special heat treatment HPS.

STANDARD DIAMETERS
From 14 to 40 mm
Other diameters on request

STRETCH AT 30% B. L. 2,16%
STRETCH AT B. L. 3,20%

COLOURS Melange Cordura® / Polyester to choose from:

SK78 - PET

PRODUCT CODE NA58C71_CW



100% SK78 · HPS TREATMENT · PU COATED TREATMENT · CAPTIVE TREATMENT

COVER
Polyester +
Captive treatment

CORE 12 plait with Dyneema® SK78 impregnated with polyurethane coating and special heat treatment HPS.

STANDARD DIAMETERS
From 14 to 40 mm
Other diameters on request

STRETCH AT 30% B. L. 2,16%
STRETCH AT B. L. 3,20%

COLOURS

Super Yacht mooring line

INCREASINGLY MAJESTIC SUPER YACHTS REQUIRE MORE AND MORE PERFORMING MOORING LINES. TO IMPROVE THE WORKING CONDITIONS OF THE CREW AS WELL AS THEIR PERFORMANCE, SUPER YACHTS MUST ADOPT MOORING LINES THAT ENSURE VERY HIGH BREAKING LOADS WITHOUT INCREASING THE DIAMETER OF THE ROPES AND AS A CONSEQUENCE THEIR WEIGHT.

Mooring of Super Yachts

Professionals are aware of the increase of accidents during the docking operation, as handling ropes having big diameter, especially when they are wet and heavy, slows down the mooring process, increases the risk of accidents and puts the crew in danger. To improve the specific working conditions of the crew, Armare managed to design mooring ropes that ensure high breaking loads without increasing diameters and weights: **Storm Line Plus**, the floating **Secur Line**, **Square Line PP** and **Novus Line** are joining the collection of Mooring Lines.

Storm Line Plus

Secur Line
(floating Dyneema®)

Square Line PP
(floating Polypropylene)

Novus Line

NEW

Polyester Stretcher Loop

Mooring ropes made of technical fibers, characterized by high breaking loads and low elongation, require the use of “shock absorbers” able to cushion tears and frequent mechanical stress Super Yacht lines are exposed to. “Stretcher Loops” guarantee a safe and more comfortable mooring of the boat to the crew and the guests, particularly in heavy winds, high waves and strong undertow. Those loops are custom-made in accordance with the breaking load of the ropes which they will be settled on. Due to the fact that the core of the ropes made of Dyneema® or HMPE fibers has a very high breaking load but a reduced elongation, like our Secure Line and in particular our Storm Line Plus, we always advise to equip them with a proper “Stretcher Loop” made of Polyester.

Splicing and protections

The great experience on Super Yacht mooring lines has taken Armare to a leading position on the market. Our strength is the possibility to customize every single detail of the rope, e.g. diameters, colours, lengths, finishing. All the splicing and protections are available on the complete range of mooring lines.

Available manifactures:

- Splicing on stainless-steel thimble
- Handmade finishing with Cordura® heavy fabric
- Handmade leather finishing
- Splicing with loop of every size
- Possibility of embroideries on every type of protection

Types of splicing and protections

Stainless-steel thimble without protection

Loop without protection

Loop with leather protection

NEW

Spliced loop with Cordura® fabric heavy protection

Available standard colours of the ropes

White | Black | Blue Navy

Available special colours of the ropes

Silver Grey | Hemp | Red

Bordeaux | English green

Available leather protections

Natural | Brown | Black

Cordura® heavy fabric

Black

All the finishes are available on the complete range of mooring lines.

SUPER YACHT MOORING LINE BREAKING LOAD AND WEIGHT COMPARATIVE TABLE

Ø	STORM LINE PLUS		FLOATING NEW NOVUS LINE		FLOATING SECUR LINE		FLOATING SQUARE LINE PP		STORM LINE		ROUND LINE		SQUARE LINE	
	NA90_SLP		NA17C63		N037		NA43		N020		NA40		NA41	
DIAM.	B. L.	WEIGHT	B. L.	WEIGHT	B. L.	WEIGHT	B. L.	WEIGHT	B. L.	WEIGHT	B. L.	WEIGHT	B. L.	WEIGHT
[mm]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]
3	-	-	-	-	-	-	-	-	-	-	-	-	-	-
4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5	-	-	-	-	-	-	-	-	-	-	-	-	-	-
6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
7	-	-	-	-	-	-	-	-	-	-	-	-	-	-
8	-	-	-	-	-	-	-	-	**2.000**	46,00	-	-	-	-
9	-	-	-	-	-	-	-	-	-	-	-	-	-	-
10	-	-	-	-	**10.000**	63,00	-	-	**2.650**	68,00	-	-	**1.600**	71,00
11	-	-	-	-	-	-	-	-	-	-	-	-	-	-
12	-	-	-	-	**12.500**	82,00	**1.560**	56,00	**3.500**	97,00	-	-	**2.100**	92,00
14	-	-	**6.000**	105,00	**15.000**	100,00	**2.000**	78,00	**4.200**	134,00	-	-	**2.900**	128,00
16	**11.500**	163,00	**7.000**	120,00	**18.000**	130,00	**2.500**	92,00	**4.900**	144,00	**4.160**	170,00	**3.500**	152,00
18	-	-	**9.000**	135,00	-	180,00	**3.200**	115,00	**5.400**	188,00	**5.018**	195,00	**4.100**	170,00
20	**18.200**	239,00	**10.500**	182,00	**23.000**	220,00	**4.000**	160,00	**8.500**	288,00	**5.460**	240,00	**4.500**	225,00
22	**24.400**	305,00	**12.700**	244,00	-	-	**5.000**	178,00	**11.600**	365,00	**6.045**	305,00	**5.000**	255,00
24	**30.000**	366,00	**14.500**	290,00	**28.000**	300,00	**5.500**	214,00	**13.500**	441,00	**6.890**	350,00	**5.700**	290,00
26	**37.000**	425,00	**15.800**	330,00	-	-	-	-	**14.600**	510,00	**8.099**	421,00	**6.500**	360,00
28	**45.000**	477,00	**17.000**	350,00	**34.000**	340,00	**7.000**	280,00	**18.500**	575,00	**10.465**	550,00	**8.400**	380,00
30	**52.000**	608,00	**19.400**	370,00	-	-	-	-	**20.000**	640,00	**11.648**	630,00	**9.650**	470,00
32	**61.000**	740,00	**20.800**	390,00	**39.000**	400,00	**9.500**	365,00	**23.600**	890,00	**12.350**	710,00	**10.870**	560,00
34	**70.000**	838,00	-	-	-	-	-	-	-	-	-	-	-	-
36	**79.000**	937,00	**22.000**	505,00	**45.000**	500,00	**13.000**	471,00	**25.500**	1.130,00	**15.600**	850,00	**13.700**	640,00
38	**88.000**	999,00	-	-	-	-	-	-	-	-	-	-	-	-
40	**99.500**	1.062,00	**25.300**	568,00	**50.000**	560,00	**17.000**	525,00	**31.000**	1.280,00	**17.500**	1.160,00	**15.580**	830,00
44	-	-	-	-	**55.000**	626,00	**19.000**	585,00	**36.000**	1.470,00	**20.000**	1.450,00	**19.400**	1.050,00
48	-	-	-	-	**60.000**	680,00	**22.500**	645,00	**40.800**	1.760,00	-	-	**23.300**	1.200,00
52	-	-	-	-	-	-	**24.000**	705,00	**49.900**	2.050,00	-	-	**28.100**	1.320,00

NOTE ABOUT BREAKING LOAD AND DIAMETERS The average values shown above are derived from tests taken at Armare laboratory, on properly spliced new ropes, and may change without notice. Other diameters available on request. The static load of the rope must not exceed 20% of breaking load shown in the table. Knots may affect the breaking load of the rope with reductions of up to 60%. The splicing increases the diameter of the rope of about 1.5 times. The use and exposure to weather conditions, depending from the kind of rope and the time of exposure, can reduce the breaking loads of the ropes.

Storm Line Plus

PRODUCT CODE NA90_SLP

100% SK78

CONSTRUCTION

Balanced twist Dyneema® braided core, Polyester cover.

FEATURES AND USE

It brings a significant improvement to the lives of the crew, ensuring very high breaking load and small diameters, extreme safety and low water absorption. Furthermore, thanks to the core in Dyneema®, the weight is halved if compared to ropes with equal load in Polyester/ Nylon. The choice of Storm Line Plus for the mooring of your boat provides an economic benefit over time, thanks to the extraordinary durability.

STANDARD DIAMETERS

From 16 to 40 mm

STANDARD COLOURS

Black | Blue Navy | Silver Grey

Novus Line NEW

PRODUCT CODE NA17C63

100% SK78 | PU COATED TREATMENT | FLOATING

CONSTRUCTION

Double Braid - 100% Dyneema® SK78 core, 100% H.T. Polypropylene cover.

FEATURES AND USE

The latest new rope concept for floatable moorings and towing lines. Novus Line is a new generation rope made with a Dyneema® SK78 braiding core, which assures the 100% of the load and protected and covered by a 12 strands braid in H.T. Polypropylene with UV treatment. The result is an incredible floating rope extremely flexible and easily maneuverable, with high breaking strength, light weight, low water absorption. It assures a good protection from accidental cutting and is spliceable with a right technique.

STANDARD DIAMETERS

From 14 to 40 mm

STANDARD COLOURS



White | Black | Yellow



Light Blue | Orange

Secur Line

PRODUCT CODE N037

100% SK78 · PU COATED TREATMENT · FLOATING DYNEEMA

CONSTRUCTION
Balanced twist 8 strand braid made with 100% Dyneema® SK78 and PU Coating.

FEATURES AND USE
Ideal for emergency anchoring and long mooring from boat to land and as towing line. Made of 100% Dyneema® SK78 it assures high breaking load, lightness, low elongation, almost zero water absorption, high visibility of the rope and high resistance to abrasion and cut.

STANDARD DIAMETERS
From 10 to 48 mm

STANDARD COLOURS

Silver Grey · Hemp · Yellow

Square Line PP

PRODUCT CODE NA43

FLOATING PP MULTIFILAMENT

CONSTRUCTION
8 strand braid in H.T. Polypropylene with UV treatment.

FEATURES AND USE
Multi-use floating line, for long moorings and towing.

STANDARD DIAMETERS
From 12 to 52 mm

STANDARD COLOURS

White · Black · Yellow · Light Blue · Arancio

Storm Line

PRODUCT CODE N020

CONSTRUCTION
Balanced twisted Polyester braided core, Polyester cover.

FEATURES AND USE
Ideal for Super Yachts but also for emergency or long moorings of small and medium sized boats.

STANDARD DIAMETERS
From 8 to 52 mm

STANDARD COLOURS

White · Black · Blue Navy

SPECIAL COLOURS

Silver Grey · Hemp · Red · Bordeaux · English Green

Round Line

PRODUCT CODE NA40

CONSTRUCTION
12 strand braid in Polyester.

FEATURES AND USE
For the mooring of small boats to Super Yachts. Always smooth, even after prolonged use. Easy to splice.

STANDARD DIAMETERS
From 16 to 44 mm

STANDARD COLOURS

White · Black · Blue Navy

SPECIAL COLOURS

Silver Grey · Hemp · Red · Bordeaux · English Green

Square Line

PRODUCT CODE NA41

CONSTRUCTION
8 strand braid in Polyester.

FEATURES AND USE
Commonly used for the mooring of all types of boats up to Super Yachts, anchoring as well as temporary and long moorings of medium and small boats.

STANDARD DIAMETERS
From 10 to 52 mm

STANDARD COLOURS

White · Black · Blue Navy

SPECIAL COLOURS

Silver Grey · Hemp · Red · Bordeaux · English Green

Racing line

ARMARE RACING LINE PRODUCTS ARE SPECIFICALLY DEDICATED TO PROFESSIONAL RACERS AND HAVE BEEN DESIGNED, MANUFACTURED AND TESTED ON HIGH PERFORMANCE BOATS, TO MEET THE SPECIFIC NEEDS OF THOSE WHO LIVE AND/OR WORK AT SEA.

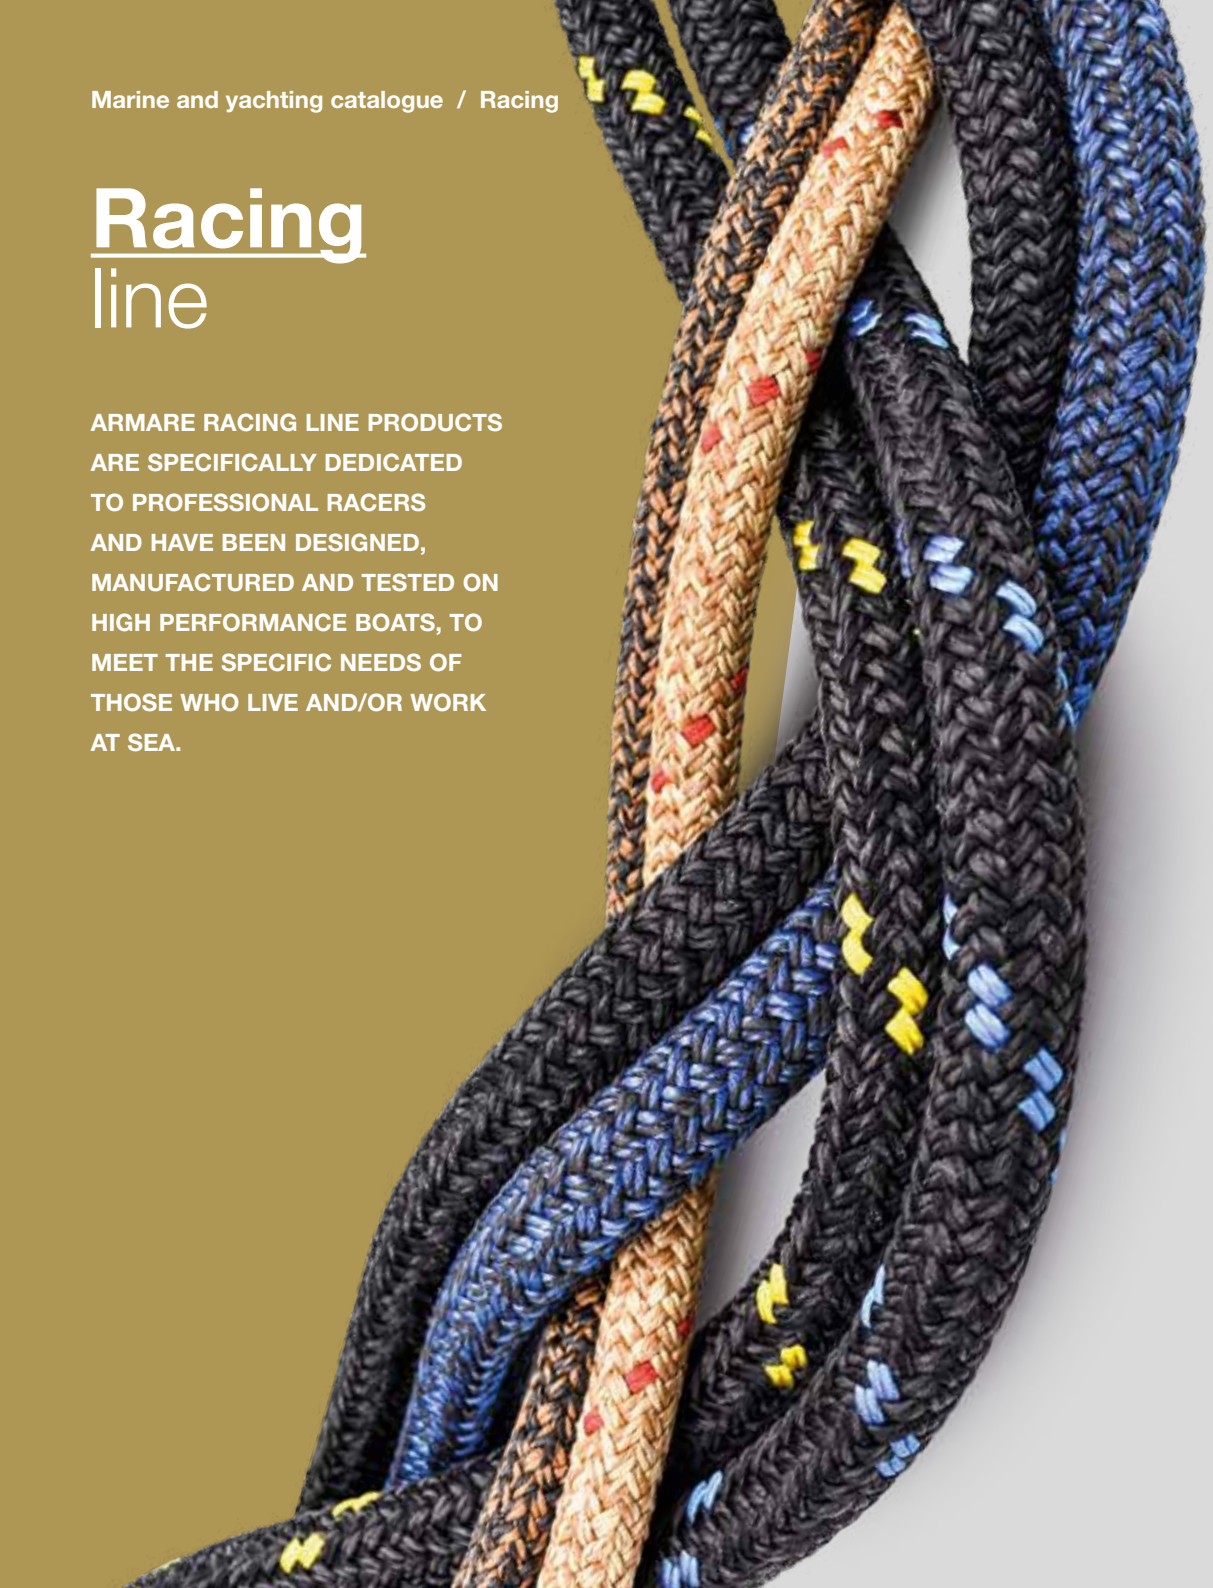

SINGLE BRAIDS

Dyneforce 99
Treatments: HPS / PU

Dyneforce 78
Treatments: HPS / PU

AVAILABLE CORES

Dyneema® SK99
Treatments: HPS / PU

Dyneema® SK78
Treatments: HPS / PU

AVAILABLE COVERS

PBO-Zylon®
Dyneema®
PBO / DYN

PBO - Zylon®
Black Technora®
or Gold Technora®
Dyneema®
PBO / BTEC or GTEC / DYN

Black Technora®
or Gold Technora®
Dyneema®
BTEC or GTEC / DYN

Black Technora®
or Gold Technora®
Dyneema®
Polyester
BTEC or GTEC / DYN / PET

Kevlar®
Dyneema®
KEV / DYN

Kevlar®
Dyneema®
Polyester
KEV / DYN / PET

Available Covers

PBO / Dyneema®

PBO / DYN

Thanks to the presence of PBO®, this cover has a high resistance to abrasion. The right mix with Dyneema® fibre transfers a good fluidity to the ropes when released on winch under load. Tests on racing boats have demonstrated the amazing durability to high frequency movements of the cover.

USE High load and temperature don't scare this cover. It is a good solution for afterguys and genoa sheets.

NEW

PBO - Zylon® / Black Technora® o Gold Technora® / Dyneema® PBO / BTEC or GTEC / DYN

This cover is the ideal choice for running rigging subjected to high loads or high temperatures. Moreover, it is suitable for all those manoeuvers where very fast recoveries are necessary as it avoids the melt of the fibers and damages that affect the life of the cover. The mixture of three different high-performance fibers guarantees a remarkable durability and smoothness as well as an excellent resistance to abrasion and heat, thanks to the high melting point of the basic fibers.

USE For the use on spinnaker/gennaker sheets, spinnaker/gennaker halyards, runner tails.

NEW

Black Technora® o Gold Technora® / Dyneema®

BTEC or GTEC / DYN

The mixture of these fibres has been carefully studied to be fairly distributed in order to make them take advantage of their mutual characteristics, both in terms of durability and performance. Excellent results in order of smoothness, abrasion resistance and durability have been reached.

USE Ideal for high fatigue manoeuvres and repeated mechanical stress, in particular where the wear of the cover is steadily present e.g. jib sheets, tacklines and staysail sheets.

NEW

Black Technora® o Gold Technora®/ Dyneema® / Polyester BTEC or GTEC / DYN / PET

This item is suitable for many different boats and uses because of its excellent resistance to abrasion and to repeated bending. Compared to TEC/DYN covers, it is easer to customize thanks to the presence of Polyester and it even becomes more recognizable in the distinction of the different manoeuvres.

USE It's simple to control and to release on winches. Ideal for jib and gennaker sheets as well as for halyard and control lines.

Kevlar® / Dyneema®

KEV / DYN

The combination in due proportions of Kevlar® and Dyneema® turns this cover into a first-class rope. It's a good alternative to PBO/DYN covers as soon as slightly lower loads but high repetition cycles on running rigging are required. Tests made on board of the top of the class racing boats during hard sessions of match races confirmed that those two fibres work in symbiosis and that their characteristics compensate one another.

USE This cover is used on One Design jib sheets and high-load tackles whenever the repetition of cycles on running rigging is high.

Kevlar®/ Dyneema®/ Polyester

KEV / DYN / PET

It preserves similar characteristics as its sister-cover BTEC/ DYN/PET, but thanks to the high melting point of Kevlar® it is more suitable for high speed manoeuvres and loads. It holds one of the best grips but a lower UV resistance in comparison to Black Technora®, which is composed by special pigments that protract the life of the rope, despite of the exposure to UV rays.

USE Ideal for manoeuvres of high fatigue and cyclical mechanical stress e.g. jib sheets, tacklines and staysail sheets.

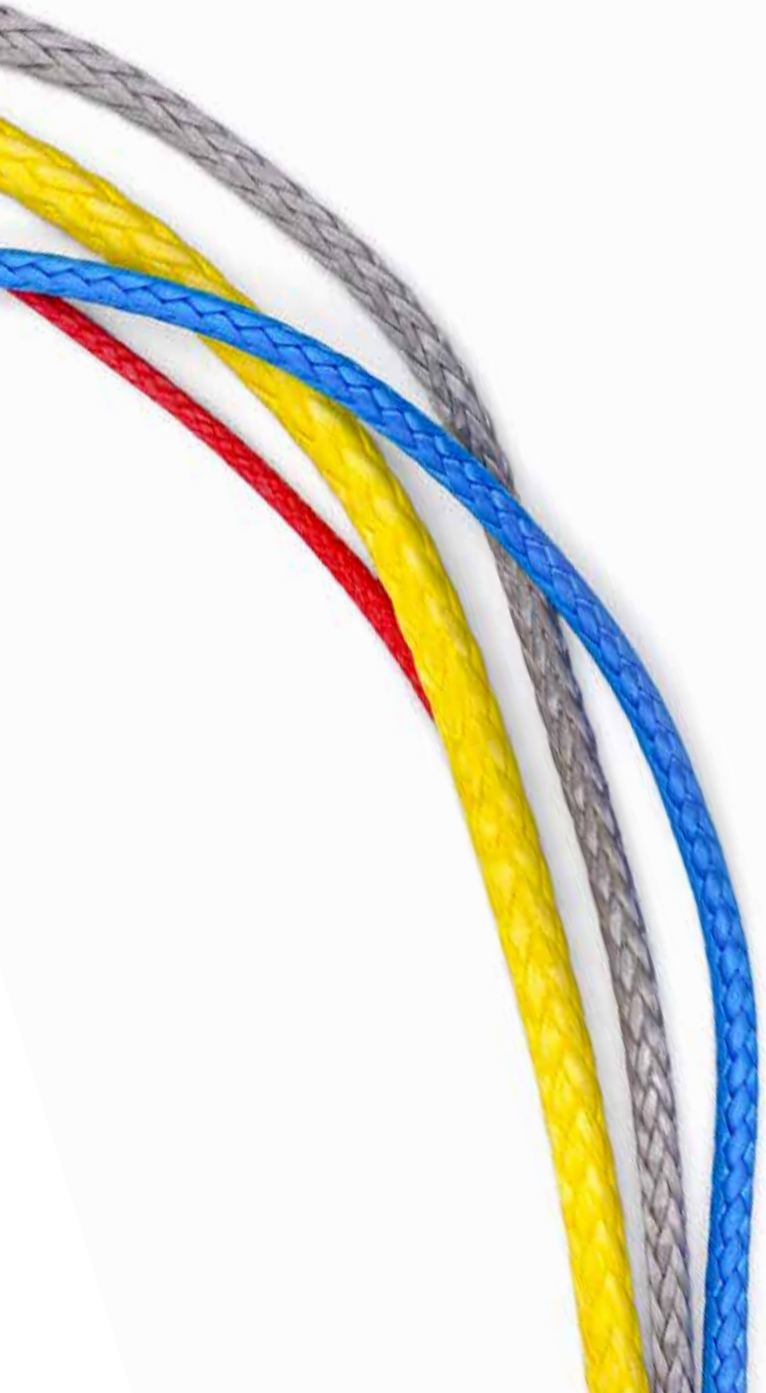

Racing line

Armare Racing Line products are made with two technical fibers that can be eventually completed with different choices of protective covers. The table summarises the main features of the fibers used for the construction of internal cores.

FIBER CHARACTERISTICS

FIBER		Dyneema® SK99	Dyneema® SK78
TENACITY	[cN/dTex]	42,50	35,10
MODULUS	[cN/dTex]	1.590	1.160
CREEP	[-]	Very Good	Very Good
SPECIFIC GRAVITY	[Kg/dm³]	0,975	0,975
MELTING TEMP	[°C]	147	147

Available Cores

Dyneema® SK99

Treatments: HPS / PU

Dyneema® SK99 delivers the highest tenacity available in a light weight polymer fiber. Indeed, compared to Dyneema® SK78, it shows a 20% increase on tenacity and a 35% higher modulus. Dyneema® SK99 appears thinner and lighter compared to ropes with the same diameter, but with a significant increase in strength, which entails an increase on performance and a better response of the boat. Other features: low water absorption, high UV resistance, minimal elongation and good flexibility.

Dyneema® SK78

Treatments: HPS / PU

The High Modulus fiber Dyneema® SK78, characterized by a remarkable stability under constant loads, provides the following features: low creep, elevated breaking load, low elongation, low weight, low level of water absorption, high resistance to UV rays and abrasion, great flexibility, high cuting resistance. The ropes made with Dyneema® SK78 + HPS + PU are therefore destined to extreme performances, especially during highly demanding regattas when the permanent load is continuously present.

DYNEFORCE 99 Single Braid

PRODUCT CODE NA20C00

100% SK99 · HPS TREATMENT · PU COATED TREATMENT

CONSTRUCTION 12 plait with Dyneema® SK99 impregnated with polyurethane coating and special heat treatment HPS.

USE Ideal for tackles, backstays, runners, baby stays, halyards on hydraulic cylinders, strops and loops; moreover for bindings where high breaking load, low elongation and taking up a minimal amount of space are required.

STANDARD DIAMETERS
From 1 to 30 mm
Other diameters on request.

STRETCH AT 30% B. L. 1,70%
STRETCH AT B. L. 2,86%

COLOURS

White · Black · Silver Grey

DYNEFORCE 99 SINGLE BRAID		
NA20C00		
DIAM [mm]	B. L. [daN]	WEIGHT [g /m]
1	**199**	0,81
1,5	**450**	1,81
2	**715**	2,41
2,5	**1.050**	3,61
3	**1.444**	6,02
3,5	**2.200**	9,63
4	**2.800**	11,20
5	**4.282**	18,05
6	**6.200**	22,86
7	**8.080**	27,50
8	**9.836**	36,50
9	**12.446**	48,13
10	**14.680**	58,80
11	**16.495**	62,00
12	**18.220**	77,00
13	**22.177**	95,22
14	**26.080**	110,00
15	**30.000**	129,00
16	**37.000**	145,00
17	**39.940**	162,00
18	**42.700**	180,00
20	**49.500**	216,00

DYNEFORCE 78 Single Braid

PRODUCT CODE NA58C00

100% SK78 · HPS TREATMENT · PU COATED TREATMENT

CONSTRUCTION 12 plait with Dyneema® SK78 impregnated with polyurethane coating and special heat treatment HPS.

USE Ideal for tackles, backstays, runners, baby stays, control lines, strops and loops; moreover for lashings where a good breaking load and a low elongation are required.

STANDARD DIAMETERS
From 1,5 to 30 mm
Other diameters on request.

STRETCH AT 30% B. L. 2,16%
STRETCH AT B. L. 3,20%

COLOURS

White · Black · Silver Grey

Yellow · Red · Green · Light Blue

DYNEFORCE 78 SINGLE BRAID		
NA58C00		
DIAM [mm]	B. L. [daN]	WEIGHT [g /m]
1	**-**	-
1,5	**708**	3,40
2	**950**	4,50
2,5	**1.155**	5,70
3	**1.386**	6,80
3,5	**1.642**	8,20
4	**2.250**	10,10
5	**3.087**	15,30
6	**4.995**	24,00
7	**6.400**	31,10
8	**7.400**	38,20
9	**9.716**	51,10
10	**11.600**	60,00
11	**13.100**	77,00
12	**16.000**	94,00
13	**17.780**	100,00
14	**20.000**	128,00
15	**23.000**	145,00
16	**26.300**	160,00
17	**29.000**	180,00
18	**31.400**	200,00
20	**37.000**	250,00

DYN - PBO / DYN

PRODUCT CODE C65

100% SK99 · 100% SK78 · HPS TREATMENT · PU COATED TREATMENT

COVER PBO® / Dyneema®

DYN SK99 HPS + PU		
NA20C65		
DIAM [mm]	B. L. [daN]	WEIGHT [g /m]
1	-	-
1,5	-	-
2	-	-
2,5	-	-
3	615	8,11
3,5	960	9,57
4	1.444	12,83
5	2.200	19,80
6	2.800	27,07
7	3.500	39,49
8	4.282	51,81
9	6.200	62,42
10	7.150	73,83
11	8.950	90,50
12	9.836	105,04
13	10.200	123,17
14	12.446	141,30
15	14.680	164,28
16	15.550	187,25
17	16.495	203,95
18	18.220	220,58
20	26.080	275,73

DYN SK78 HPS + PU		
NA58C65		
DIAM [mm]	B. L. [daN]	WEIGHT [g /m]
1	-	-
1,5	-	-
2	-	-
2,5	-	-
3	500	7,73
3,5	708	9,48
4	950	12,70
5	1.386	19,60
6	2.250	26,80
7	2.669	39,10
8	3.087	51,30
9	4.995	61,80
10	5.700	73,10
11	6.900	89,60
12	8.550	104,00
13	9.716	121,80
14	10.100	139,90
15	11.600	162,65
16	13.100	185,40
17	14.500	202,00
18	16.000	218,40
20	20.000	273,00

DYN - PBO / BTEC o GTEC / DYN

PRODUCT CODE C75 - C76

100% SK99 · 100% SK78 · HPS TREATMENT · PU COATED TREATMENT

COVER PBO® / Black Technora®
or Gold Technora® / Dyneema®

DYN SK99 HPS + PU		
NA20C75 - C76		
DIAM [mm]	B. L. [daN]	WEIGHT [g /m]
1	-	-
1,5	-	-
2	-	-
2,5	-	-
3	615	7,88
3,5	960	9,29
4	1.444	12,42
5	2.200	19,19
6	2.800	26,23
7	3.500	38,60
8	4.282	50,58
9	6.200	60,97
10	7.150	72,05
11	8.950	88,39
12	9.836	102,55
13	10.200	120,38
14	12.446	138,21
15	14.680	160,51
16	15.550	182,81
17	16.495	199,08
18	18.220	215,28
20	26.080	269,12

DYN SK78 HPS + PU		
NA58C75 - C76		
DIAM [mm]	B. L. [daN]	WEIGHT [g /m]
1	-	-
1,5	-	-
2	-	-
2,5	-	-
3	500	7,73
3,5	708	9,48
4	950	12,70
5	1.386	19,60
6	2.250	26,80
7	2.669	39,10
8	3.087	51,30
9	4.995	61,80
10	5.700	73,10
11	6.900	89,60
12	8.550	104,00
13	9.716	121,80
14	10.100	139,90
15	11.600	162,65
16	13.100	185,40
17	14.500	202,00
18	16.000	218,40
20	20.000	273,00

DYN - BTEC o GTEC / DYN

PRODUCT CODE C35 - C72

100% SK99 · 100% SK78 · HPS TREATMENT · PU COATED TREATMENT

COVER Black Technora®
or Gold Technora® / Dyneema®

DYN SK99 HPS + PU		
NA20C35 - C72		
DIAM [mm]	B. L. [daN]	WEIGHT [g /m]
1	-	-
1,5	-	-
2	-	-
2,5	-	-
3	615	7,96
3,5	960	9,38
4	1.444	12,55
5	2.200	19,38
6	2.800	26,77
7	3.500	39,19
8	4.282	51,31
9	6.200	61,91
10	7.150	73,23
11	8.950	89,69
12	9.836	104,13
13	10.200	122,11
14	12.446	140,09
15	14.680	162,86
16	15.550	185,64
17	16.495	202,19
18	18.220	218,67
20	26.080	273,31

DYN SK78 HPS + PU		
NA58C35 - C72		
DIAM [mm]	B. L. [daN]	WEIGHT [g /m]
1	-	-
1,5	-	-
2	-	-
2,5	-	-
3	500	7,58
3,5	708	9,29
4	950	12,52
5	1.386	19,19
6	2.250	26,50
7	2.669	38,80
8	3.087	50,80
9	4.995	61,30
10	5.700	72,50
11	6.900	88,80
12	8.550	103,10
13	9.716	121,00
14	10.100	138,70
15	11.600	161,25
16	13.100	183,80
17	14.500	200,15
18	16.000	216,50
20	20.000	270,60

DYN - BTEC o GTEC / DYN / PET

PRODUCT CODE C85 - C80

100% SK99 · 100% SK78 · HPS TREATMENT · PU COATED TREATMENT

COVER Black Technora®
or Gold Technora® / Dyneema® / Polyester

DYN SK99 HPS + PU		
NA20C85 - C80		
DIAM	B. L.	WEIGHT
[mm]	[daN]	[g /m]
1	-	-
1,5	-	-
2	-	-
2,5	-	-
3	615	7,88
3,5	960	9,29
4	1.444	12,42
5	2.200	19,19
6	2.800	26,23
7	3.500	38,60
8	4.282	50,58
9	6.200	60,97
10	7.150	72,05
11	8.950	88,39
12	9.836	102,55
13	10.200	120,38
14	12.446	138,21
15	14.680	160,51
16	15.550	182,81
17	16.495	199,08
18	18.220	215,28
20	26.080	269,12

DYN SK78 HPS + PU		
NA58C85 - C80		
DIAM	B. L.	WEIGHT
[mm]	[daN]	[g /m]
1	-	-
1,5	-	-
2	-	-
2,5	-	-
3	500	7,55
3,5	708	9,26
4	950	12,30
5	1.386	19,00
6	2.250	26,16
7	2.669	38,22
8	3.087	50,08
9	4.995	60,37
10	5.700	71,34
11	6.900	87,51
12	8.550	101,53
13	9.716	119,00
14	10.100	136,51
15	11.600	158,76
16	13.100	181,00
17	14.500	197,08
18	16.000	213,15
20	20.000	266,46

DYN - KEV / DYN

PRODUCT CODE C68

100% SK99 · 100% SK78 · HPS TREATMENT · PU COATED TREATMENT

COVER Kevlar® / Dyneema®

DYN SK99 HPS + PU		
NA20C68		
DIAM	B. L.	WEIGHT
[mm]	[daN]	[g /m]
1	-	-
1,5	-	-
2	-	-
2,5	-	-
3	615	8,04
3,5	960	9,48
4	1.444	12,73
5	2.200	19,59
6	2.800	26,77
7	3.500	39,19
8	4.282	51,31
9	6.200	61,91
10	7.150	73,23
11	8.950	89,69
12	9.836	104,13
13	10.200	122,11
14	12.446	140,09
15	14.680	162,86
16	15.550	185,64
17	16.495	202,19
18	18.220	218,67
20	26.080	273,31

DYN SK78 HPS + PU		
NA58C68		
DIAM	B. L.	WEIGHT
[mm]	[daN]	[g /m]
1	-	-
1,5	-	-
2	-	-
2,5	-	-
3	500	7,61
3,5	708	9,34
4	950	12,59
5	1.386	19,40
6	2.250	26,50
7	2.669	38,80
8	3.087	50,80
9	4.995	61,30
10	5.700	72,50
11	6.900	88,80
12	8.550	103,10
13	9.716	120,79
14	10.100	138,70
15	11.600	161,25
16	13.100	183,80
17	14.500	200,15
18	16.000	216,50
20	20.000	270,60

DYN - KEV / DYN / PET

PRODUCT CODE C78

100% SK99 · 100% SK78 · HPS TREATMENT · PU COATED TREATMENT

COVER Kevlar® / Dyneema® / Polyester

DYN SK99 HPS + PU		
NA20C78		
DIAM	B. L.	WEIGHT
[mm]	[daN]	[g /m]
1	-	-
1,5	-	-
2	-	-
2,5	-	-
3	615	7,80
3,5	960	9,20
4	1.444	12,30
5	2.200	19,00
6	2.800	26,23
7	3.500	38,60
8	4.282	50,58
9	6.200	60,97
10	7.150	72,05
11	8.950	88,39
12	9.836	102,55
13	10.200	120,38
14	12.446	138,21
15	14.680	160,51
16	15.550	182,81
17	16.495	199,08
18	18.220	215,28
20	26.080	269,12

DYN SK78 HPS + PU		
NA58C78		
DIAM	B. L.	WEIGHT
[mm]	[daN]	[g /m]
1	-	-
1,5	-	-
2	-	-
2,5	-	-
3	500	7,43
3,5	708	9,11
4	950	12,28
5	1.386	18,81
6	2.250	26,16
7	2.669	38,22
8	3.087	50,08
9	4.995	60,37
10	5.700	71,34
11	6.900	87,51
12	8.550	101,53
13	9.716	119,00
14	10.100	136,51
15	11.600	158,76
16	13.100	181,00
17	14.500	197,08
18	16.000	213,15
20	20.000	266,46

Soft Braid
Racing

SOFT BRAIDS SELECTION CHARACTERIZED BY THE EXCLUSIVE SUPER SHAPE CONSTRUCTION WITH ANTI-FLATTENING INSERT, SUITABLE TO BE USED AS SHEETS ON RATCHET BLOCKS IN PROFESSIONAL MONOTYPES SUCH AS MELGES, J-70 CLASS AND OTHERS.

Soft Braid 5 - 6 - 7- 8
Extreme use
on high performance
monotypes

SUPER SHAPE

Soft Braid 5 - 6 - 7 - 8 are characterized by the exclusive Super Shape finishing with anti-flattening insert. So these ropes are intended for use as sheets on ratchet blocks, where they are subjected to high localized wear; the special Super Shape treatment prevents triangulation.They are the ideal choice for professional monotypes such as Melges, J-70 class and others.

NEW

SUPER SHAPE								
Ø	SOFT BRAID 5		SOFT BRAID 6		SOFT BRAID 7		SOFT BRAID 8	
DIAM.	B. L.	WEIGHT	B. L.	WEIGHT	B. L.	WEIGHT	B. L.	WEIGHT
[mm]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]
4	**-**	-	**-**	-	**-**	-	**-**	-
5	**-**	-	**-**	-	**-**	-	**-**	-
6	**800**	30,20	**800**	31,10	**800**	30,80	**800**	30,80
7	**1.100**	38,40	**1.100**	39,60	**1.100**	39,20	**1.100**	39,20
8	**1.530**	51,20	**1.530**	52,80	**1.530**	52,20	**1.530**	52,20
9	**2.300**	63,60	**2.300**	65,50	**2.300**	64,90	**2.300**	64,90
10	**3.230**	76,10	**3.230**	78,40	**3.230**	77,60	**3.230**	77,60
11	**4.400**	90,00	**4.400**	92,70	**4.400**	91,80	**4.400**	91,80

NOTE ABOUT BREAKING LOAD AND DIAMETERS
The average values shown above are derived from tests taken at Armare laboratory, on properly spliced new ropes, and may change without notice. Other diameters available on request. The static load of the rope must not exceed 20% of breaking load shown in the table. Knots may affect the breaking load of the rope with reductions of up to 60%. The splicing increases the diameter of the rope of about 1.5 times. The use and exposure to weather conditions, depending from the kind of rope and the time of exposure, can reduce the breaking loads of the ropes.

SUPER SHAPE

Soft Braid 5

PET + GRIP / DYN

PRODUCT CODE NA26C82

100% SK78 · PU COATED TREATMENT · SUPER SHAPE

CONSTRUCTION Double braid
COVER PET + Grip / Dyneema®
CORE 12 strand braid, made with Dyneema® SK78, impregnated with PU coating and anti-flattening insert.

FEATURES AND USE Sliding cover and resistant to abrasions. Super Shape core with anti-flattening insert. For sheets which are designed to perfectly work on winches and blocks and do not create loops and kinks.

STANDARD DIAMETERS From 6 to 11 mm
STRETCH AT 30% B. L. 2,70%
STRETCH AT B. L. 3,40%

COLOURS

Black · Silver Grey · Yellow · Yellow Fluo · Red · Orange Fluo · Green · Light Blue

Soft Braid 6

PET + GRIP / KEV

PRODUCT CODE NA26C84

100% SK78 · PU COATED TREATMENT · SUPER SHAPE

CONSTRUCTION Double braid
COVER PET + Grip / Kevlar®
CORE 12 strand braid, made with Dyneema® SK78, impregnated with PU coating and anti-flattening insert.

FEATURES AND USE The cover is very resistant to temperature abrasions. Super Shape core with anti-flattening insert. For sheets which are designed to perfectly work on winches and blocks and suffer from high temperature wear and tear, reached during fast surges. It does not create loops and kinks.

STANDARD DIAMETERS From 6 to 11 mm
STRETCH AT 30% B. L. 2,70%
STRETCH AT B. L. 3,40%

COLOURS

Black · Silver Grey · Yellow · Red · Green · Light Blue

Soft Braid 7

PET + GRIP / DYN / KEV

PRODUCT CODE NA26C83

100% SK78 · PU COATED TREATMENT · SUPER SHAPE

CONSTRUCTION Double braid
COVER PET + Grip / Dyneema® / Kevlar®
CORE 12 strand braid, made with Dyneema® SK78, impregnated with PU coating and anti-flattening insert.

FEATURES AND USE The cover is very resistant to temperature abrasions. Super Shape core with anti-flattening insert. For sheets which are designed to perfectly work on winches and blocks and suffer from wear and tear due to numerous maneuvers. It does not create loops and kinks.

STANDARD DIAMETERS From 6 to 11 mm
STRETCH AT 30% B. L. 2,70%
STRETCH AT B. L. 3,40%

COLOURS

Black · Silver Grey · Yellow · Red · Green · Light Blue

Soft Braid 8

NEW

BTEC / CDYN / PET

PRODUCT CODE NA26C85_CDY

100% SK78 · PU COATED TREATMENT · SUPER SHAPE

CONSTRUCTION Double braid
COVER Black Technora® / Black Dyneema® / Black Polyester
CORE 12 strand braid, made with Dyneema® SK78, impregnated with PU coating and anti-flattening insert.

FEATURES AND USE The cover is very resistant to temperature abrasions. Super Shape core with anti-flattening insert. For sheets which are designed to perfectly work on winches and blocks and suffer from wear and tear due to numerous maneuvers. It does not create loops and kinks.

STANDARD DIAMETERS From 6 to 11 mm
STRETCH AT 30% B. L. 2,70%
STRETCH AT B. L. 3,40%

COLOURS

Black

Performance line

TECHNICAL ROPES FOR RACING BOATS. THIS LINE IS CONSTANTLY ANALYSED AND UPDATED IN ORDER TO GIVE AN APPROPIATE PERFORMANCE TO THE REQUIREMENTS OF THE MOST DEMANDING CREWS.

SINGLE BRAIDS

Dyneforce 78
Treatments: HPS / PU

Superound 78
Treatments: PU

Light 78
Treatments: None

VEC-TEC
Treatments: PU

AVAILABLE CORES

Dyneema® SK78
Treatments: HPS / PU

Dyneema® SK78
Treatments: PU

Dyneema® SK78
Treatments: None

Vectran®
Treatments: PU

AVAILABLE COVERS

Black Technora®
Dyneema®
BTEC / DYN

Black Technora®
Dyneema®
Polyester
BTEC / DYN / PET

Black Technora®
Polyester
BTEC / PET

Kevlar®
Dyneema®
Polyester
KEV / DYN / PET

Cordura®
Polyester
CRD / PET

Polyester
PET

Performance line

Armare Performance line products are made with two different fibers that can be eventually completed with different choices of treatment and protective covers. The table summarises the main features of the fibers used for the construction of braids.

FIBER		Dyneema® SK78	Vectran®
TENACITY	[cN/dTex]	35,10	24,2
MODULUS	[cN/dTex]	1.160	530
CREEP	[-]	Very good	Excellent
SPECIFIC GRAVITY	[Kg/dm³]	0,975	1,410
FUSION TEMP	[°C]	147	330

Available Cores

Dyneema® SK78

100% SK78 · HPS TREATMENT · PU COATED TREATMENT

Treatments: HPS / PU

The High Modulus fiber Dyneema® SK78, characterized by a remarkable stability under constant loads, provides the following features: low creep, elevated breaking load, low elongation, light weight, low level of water absorption, high resistance to UV rays and abrasion, great flexibility, high resistance to cutting. The ropes made with Dyneema® SK78 + HPS + PU are therefore destined to extreme performances, especially during highly demanding regattas when the permanent load is continuously present.

Dyneema® SK78

100% SK78

Treatments: None

These ropes are made with the same quantity of Dyneema® SK78 and the same parameters of construction as the previous versions, but they have not undergone any type of treatment. This makes them soft, while maintaining all the characteristics of Dyneema® SK78 with slightly lower performance. Given the absence of treatment, it is not advisable to use the rope without a cover. Particularly suitable for ropes when maximum handling over time is required.

Dyneema® SK78

100% SK78 · PU COATED TREATMENT

Treatments: PU

This Line of ropes differs from the previous version Dyneema® SK78 + HPS + PU to the lack of the HPS treatment, which means that there is no thermic pre-stretching under load. This makes the rope more manageable, as the core is more supple. It has a slightly different breaking load and elongation in comparison with DYN 78 + HPS + PU, because the braid is not settled (it means that the differences of tensions between fibers are not adjusted). However, its general features remain at a high level, making this rope affordable to boats and crews of a less extreme technical level.

Vectran®

100% VECTRAN · PU COATED TREATMENT

Treatments: PU

The main feature of the Vectran® fiber is having a near zero creep if used under loads up to 50% of the breaking load. Vectran® braids are ideal when used under static loads, e.g. as main sail and genoa halyards, as well as for steering line systems and afterguys. But it's important to remember that the fibre is not resistant to UV rays and therefore it isn't particularly suitable to be used without cover, unless in specific cases protected from the light or if replacements are constantly planned.

Available Covers

Black Technora® / Dyneema®
BTEC / DYN

The mixture of these fibres has been carefully studied to be fairly distributed in order to make them take advantage of their mutual characteristics, both in terms of durability and performance. Excellent results in order of smoothness, abrasion resistance and durability have been reached.

Black Technora® / Dyneema® / Polyester
BTEC / DYN / PET

This item is suitable for many different boats and uses because of its excellent resistance to abrasion and to repeated bending. Compared to TEC/DYN covers, it is easier to customize thanks to the presence of Polyester and it even becomes more recognizable in the distinction of the different manoeuvres.

Black Technora® / Polyester
BTEC / PET

It combines high level functional characteristics, with UV and abrasion resistance as well as a good grip. Thanks to the mixture among the Black Technora® and the different Polyester colours, the look is also winning.

Kevlar® / Dyneema® / Polyester
KEV / DYN / PET

It preserves similar characteristics as its sister-cover BTEC/DYN/PET, but thanks to the high point of fusion of Kevlar® it is more suitable for high speed manoeuvres and load, where the ropes reach high temperatures. It holds one of the best grips but a lower UV resistance in comparison to Black Technora®, which is composed by special pigments that protract the life of the rope, despite of the exposure to UV rays.

Cordura® / Polyester
CRD / PET

This rope stands out for its lightness and perfect grip.
It has been studied to obtain an excellent grip on stoppers and winches through the use of special anti-slip fibers.

Polyester
PET

It is the most used fiber on different types of boats thanks to its good resistance to UV rays and to abrasion and for its excellent durability to atmospheric agents. Moreover, it is easy to customize and ideal to identify the different maneouvres.

Other covers available: PBO / PET KEV / DYN KEV / PET DYN / PET

DYNEEMA® SK78 + HPS + PU

DYNEEMA® SK78 + HPS + PU - BREAKING LOAD AND WEIGHT COMPARATIVE TABLE

Ø	DYNEFORCE 78 SINGLE BRAID			FOR ALL COVERS	BTEC/DYN	BTEC/DYN/ PET	BTEC/PET	KEV/DYN/ PET	CRD/ PET	PET
	NA58C00				NA58C35	NA58C85	NA58C86	NA58C78	NA58C24	NA58C71
DIAM	B. L.	WEIGHT		B. L.	WEIGHT	WEIGHT	WEIGHT	WEIGHT	WEIGHT	WEIGHT
[mm]	[daN]	[g /m]		[daN]	[g /m]	[g /m]	[g /m]	[g /m]	[g /m]	[g /m]
1	**-**	-		**-**	-	-	-	-	-	-
1,5	**708**	3,40		**-**	-	-	-	-	-	-
2	**950**	4,50		**243**	4,75	4,73	4,79	4,65	4,65	4,70
2,5	**1.155**	5,70		**337**	5,76	5,73	5,81	5,64	5,64	5,70
3	**1.386**	6,80		**500**	7,58	7,55	7,65	7,43	7,43	7,50
3,5	**1.642**	8,20		**708**	9,29	9,26	9,38	9,11	9,11	9,20
4	**2.250**	10,10		**950**	12,52	12,30	12,65	12,28	12,28	12,40
5	**3.087**	15,30		**1.386**	19,19	19,00	19,38	18,81	18,81	19,00
6	**4.995**	24,00		**2.250**	26,50	26,16	26,70	26,16	25,74	26,00
7	**6.400**	31,10		**2.669**	38,80	38,22	38,90	38,22	35,28	36,00
8	**7.400**	38,20		**3.087**	50,80	50,08	51,10	50,08	44,74	46,80
9	**9.716**	51,10		**4.995**	61,30	60,37	62,00	60,37	59,40	60,00
10	**11.600**	60,00		**5.700**	72,50	71,34	72,80	71,34	70,29	71,00
11	**13.100**	77,00		**6.900**	88,80	87,51	88,10	87,51	85,00	87,00
12	**16.000**	94,00		**8.550**	103,10	101,53	103,60	101,53	100,00	101,00
13	**17.780**	100,00		**9.716**	121,00	119,00	121,30	119,00	114,36	116,90
14	**20.000**	128,00		**10.100**	138,70	136,51	139,30	136,51	134,44	148,40
15	**23.000**	145,00		**11.600**	161,25	158,76	162,00	158,76	156,32	164,20
16	**26.300**	160,00		**13.100**	183,80	181,00	184,70	181,00	178,20	180,00
17	**29.000**	180,00		**14.500**	200,15	197,08	201,10	197,08	194,05	196,00
18	**31.400**	200,00		**16.000**	216,50	213,15	217,50	213,15	209,90	212,00
20	**37.000**	250,00		**20.000**	270,60	266,46	271,90	266,46	262,35	265,00

NOTE ABOUT BREAKING LOAD AND DIAMETERS The average values shown above are derived from tests taken at Armare laboratory, on properly spliced new ropes, and may change without notice. Other diameters available on request. The static load of the rope must not exceed 20% of breaking load shown in the table. Knots may affect the breaking load of the rope with reductions of up to 60%. The splicing increases the diameter of the rope of about 1.5 times. The use and exposure to weather conditions, depending from the kind of rope and the time of exposure, can reduce the breaking loads of the ropes.

DYNEFORCE 78 Single Braid

PRODUCT CODE NA58C00

100% SK78 · HPS TREATMENT · PU COATED TREATMENT

CONSTRUCTION 12 plait with Dyneema® SK78 impregnated with polyurethane coating and special heat treatment HPS.

USE Ideal for tackles, backstays, runners, baby stays, control lines, strops and loops; moreover for lashings where a good breaking load and a low elongation are required.

STANDARD DIAMETERS
From 1,5 to 30 mm
Other diameters on request

STRETCH AT 30% B. L. 2,16%
STRETCH AT B. L. 3,20%

COLOURS

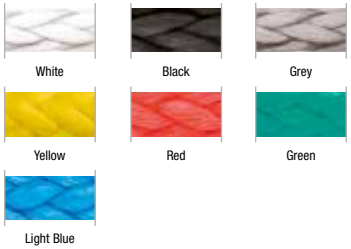

SK78 - BTEC / DYN

PRODUCT CODE NA58C35

100% SK78 · HPS TREATMENT · PU COATED TREATMENT

COVER Black Technora® / Dyneema®

CORE 12 plait with Dyneema® SK78 impregnated with polyurethane coating and special heat treatment HPS.

USE Ideal for manoeuvres of high fatigue and cyclical mechanical stress, in particular where the wear of the cover is steadily present e.g. jib sheets, tacklines and staysail sheets.

STANDARD DIAMETERS
From 2 to 30 mm
Other diameters on request

STRETCH AT 30% B. L. 2,16%
STRETCH AT B. L. 3,20%

COLOURS Melange Natural Black Technora® / Dyneema®.

SK78 - BTEC / DYN / PET

PRODUCT CODE NA58C85

100% SK78 · HPS TREATMENT · PU COATED TREATMENT

COVER Black Technora® / Dyneema® / Polyester

CORE 12 plait with Dyneema® SK78 impregnated with polyurethane coating and special heat treatment HPS.

USE It's simple to control and to release on winches. Ideal for jib and gennaker sheets, halyards and control lines.

STANDARD DIAMETERS
From 2 to 30 mm
Other diameters on request

STRETCH AT 30% B. L. 2,16%
STRETCH AT B. L. 3,20%

COLOURS Melange Black Technora® / Dyneema® / Polyester to choose from:

SK78 - BTEC / PET

PRODUCT CODE NA58C86



100% SK78 · HPS TREATMENT · PU COATED TREATMENT

COVER Black Technora® / Polyester

CORE 12 plait with Dyneema® SK78 impregnated with polyurethane coating and special heat treatment HPS.

USE This rope is used on monotypes, oceanic boats and on Super Yachts as sheets and halyards with a good grip and high chafe resistance.

STANDARD DIAMETERS
From 2 to 30 mm
Other diameters on request

STRETCH AT 30% B. L. 2,16%
STRETCH AT B. L. 3,20%

COLOURS Melange Black Technora® / Polyester to choose from:

SK78 - KEV / DYN / PET

PRODUCT CODE NA58C78

100% SK78 · HPS TREATMENT · PU COATED TREATMENT

COVER Kevlar® / Dyneema® / Polyester

CORE 12 plait with Dyneema® SK78 impregnated with polyurethane coating and special heat treatment HPS.

USE Ideal for manoeuvres of high fatigue and cyclical mechanical stress e.g. jib sheets, tacklines and staysail sheets.

STANDARD DIAMETERS
From 2 to 30 mm
Other diameters on request

STRETCH AT 30% B. L. 2,16%
STRETCH AT B. L. 3,20%

COLOURS Melange Kevlar® / Dyneema® / Polyester to choose from:

SK78 - CRD / PET

PRODUCT CODE NA58C24

100% SK78 · HPS TREATMENT · PU COATED TREATMENT

COVER Cordura® / Polyester

CORE 12 plait with Dyneema® SK78 impregnated with polyurethane coating and special heat treatment HPS.

USE Excellent grip on stoppers and winches. It can be chosen either as halyard, as sheet and for all control lines thanks to its soft and grip touch.

STANDARD DIAMETERS
From 2 to 30 mm
Other diameters on request

STRETCH AT 30% B. L. 2,16%
STRETCH AT B. L. 3,20%

COLOURS Melange Cordura® / Polyester to choose from:

SK78 - PET

PRODUCT CODE NA58C71

100% SK78 · HPS TREATMENT · PU COATED TREATMENT

COVER Polyester

CORE 12 plait with Dyneema® SK78 impregnated with polyurethane coating and special heat treatment HPS.

USE Indicated for multiple uses: sheets, halyards and general running rigging.

STANDARD DIAMETERS
From 2 to 30 mm
Other diameters on request

STRETCH AT 30% B. L. 2,16%
STRETCH AT B. L. 3,20%

COLOURS to choose from:

DYNEEMA® SK78 + PU

DYNEEMA® SK78 + PU - BREAKING LOAD AND WEIGHT COMPARATIVE TABLE

Ø	SUPEROUND 78 SINGLE BRAID			FOR ALL COVERS	BTEC/DYN	BTEC/DYN/ PET	BTEC/PET	KEV/DYN/ PET	CRD/ PET	PET
	NA17C00				NA17C35	NA17C85	NA17C86	NA17C78	NA17C24	NA17C71
DIAM	B. L.	WEIGHT		B. L.	WEIGHT	WEIGHT	WEIGHT	WEIGHT	WEIGHT	WEIGHT
[mm]	[daN]	[g /m]		[daN]	[g /m]	[g /m]	[g /m]	[g /m]	[g /m]	[g /m]
1	**-**	-		**-**	-	-	-	-	-	-
1,5	**-**	-		**-**	-	-	-	-	-	-
2	**470**	2,43		**100**	4,34	4,33	4,39	4,26	4,26	4,30
2,5	**700**	3,80		**140**	5,76	5,73	5,81	5,64	5,64	5,70
3	**920**	5,00		**300**	6,97	6,94	7,04	6,83	6,83	6,90
3,5	**1.020**	7,50		**470**	9,39	9,36	9,49	9,21	9,21	9,30
4	**1.600**	9,80		**700**	12,52	12,30	12,65	12,28	12,28	12,40
5	**2.800**	14,40		**950**	19,29	19,30	19,48	18,91	18,91	19,10
6	**4.100**	20,00		**1.700**	26,50	26,17	26,70	26,17	25,74	26,00
7	**6.100**	27,00		**2.600**	38,20	37,70	38,50	37,70	37,62	38,00
8	**7.150**	35,00		**2.800**	49,90	49,20	50,20	49,20	48,40	48,90
9	**8.100**	46,00		**4.100**	60,15	59,30	60,50	59,30	58,41	59,00
10	**10.200**	57,00		**5.470**	70,40	69,38	70,80	69,38	68,31	69,00
11	**12.100**	61,00		**6.100**	85,75	84,50	86,20	84,48	83,16	87,00
12	**15.200**	68,00		**7.562**	101,10	99,57	101,60	99,57	98,00	99,00
13	**16.700**	73,00		**8.100**	118,80	117,00	120,55	118,10	115,43	116,60
14	**17.850**	78,00		**9.150**	136,60	134,55	137,30	134,55	132,46	133,80
15	**20.500**	90,00		**11.000**	154,30	151,98	146,70	151,98	143,55	150,50
16	**22.000**	102,00		**12.100**	171,50	168,95	172,40	168,95	166,32	168,00
17	**23.600**	114,10		**13.630**	180,10	177,10	181,00	177,10	174,30	176,00
18	**25.000**	126,00		**15.200**	187,90	185,02	188,80	185,02	182,16	184,00
20	**28.700**	160,00		**17.850**	247,10	243,33	248,30	243,33	239,58	242,00

NOTE ABOUT BREAKING LOAD AND DIAMETERS The average values shown above are derived from tests taken at Armare laboratory, on properly spliced new ropes, and may change without notice. Other diameters available on request. The static load of the rope must not exceed 20% of breaking load shown in the table. Knots may affect the breaking load of the rope with reductions of up to 60%. The splicing increases the diameter of the rope of about 1.5 times. The use and exposure to weather conditions, depending from the kind of rope and the time of exposure, can reduce the breaking loads of the ropes.

SUPEROUND 78 Single Braid

PRODUCT CODE NA17C00

100% SK78 · PU COATED TREATMENT

CONSTRUCTION 12 plait with Dyneema® SK78 impregnated with polyurethane coating.

USE Ideal for bindings, leading blocks, control lines and tackles.

STANDARD DIAMETERS
From 2 to 30 mm
Other diameters on request

STRETCH AT 30% B. L. 2,60%
STRETCH AT B. L. 3,60%

COLOURS

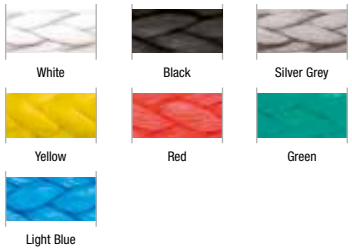

SK78 - BTEC / DYN

PRODUCT CODE NA17C35

100% SK78 · PU COATED TREATMENT

COVER Black Technora® / Dyneema®

CORE 12 plait with Dyneema® SK78 impregnated with polyurethane coating.

USE Ideal for manoeuvres of high fatigue and cyclical mechanical stress, in particular where the wear of the cover is steadily present e.g. jib sheets, tacklines and staysail sheets.

STANDARD DIAMETERS
From 2 to 30 mm
Other diameters on request

STRETCH AT 30% B. L. 2,60%
STRETCH AT B. L. 3,60%

COLOURS Melange Natural Black Technora® / Dyneema®.

SK78 - BTEC / DYN / PET

PRODUCT CODE NA17C85

100% SK78 PU COATED TREATMENT

COVER Black Technora® / Dyneema® / Polyester

CORE 12 plait with Dyneema® SK78 impregnated with polyurethane coating.

USE It's simple to control and to release on winches. Ideal for jib and gennaker sheets, halyards and control lines.

STANDARD DIAMETERS
From 2 to 30 mm
Other diameters on request

STRETCH AT 30% B. L. 2,60%
STRETCH AT B. L. 3,60%

COLOURS Melange Black Technora® / Dyneema® / Polyester to choose from:

SK78 - BTEC / PET

PRODUCT CODE NA17C86

100% SK78 PU COATED TREATMENT

COVER Black Technora® / Polyester

CORE 12 plait with Dyneema® SK78 impregnated with polyurethane coating.

USE This rope is used on monotypes, oceanic boats and on Super Yachts as sheets and halyards with a good grip and high chafe resistance.

STANDARD DIAMETERS
From 2 to 30 mm
Other diameters on request

STRETCH AT 30% B. L. 2,60%
STRETCH AT B. L. 3,60%

COLOURS Melange Black Technora® / Polyester to choose from:

SK78 - KEV / DYN / PET

PRODUCT CODE NA17C78

100% SK78 PU COATED TREATMENT

COVER Kevlar® / Dyneema® / Polyester

CORE 12 plait with Dyneema® SK78 impregnated with polyurethane coating.

USE Ideal for manoeuvres of high fatigue and cyclical mechanical stress e.g. jib sheets, tacklines and staysail sheets.

STANDARD DIAMETERS
From 2 to 30 mm
Other diameters on request

STRETCH AT 30% B. L. 2,60%
STRETCH AT B. L. 3,60%

COLOURS Melange Kevlar® / Dyneema® / Polyester to choose from:

SK78 - CRD / PET

PRODUCT CODE NA17C24

100% SK78 PU COATED TREATMENT

COVER Cordura® / Polyester

CORE 12 plait with Dyneema® SK78 impregnated with polyurethane coating.

USE Excellent grip on stoppers and winches. It can be chosen either as halyard, as sheet and for all control lines thanks to its soft and grip touch.

STANDARD DIAMETERS
From 2 to 30 mm
Other diameters on request

STRETCH AT 30% B. L. 2,60%
STRETCH AT B. L. 3,60%

COLOURS Melange Cordura® / Polyester to choose from:

SK78 - PET

PRODUCT CODE NA17C71

100% SK78 PU COATED TREATMENT

COVER Polyester

CORE 12 plait with Dyneema® SK78 impregnated with polyurethane coating.

USE Indicated for multiple uses: sheets, halyards and general running rigging.

STANDARD DIAMETERS
From 2 to 30 mm
Other diameters on request

STRETCH AT 30% B. L. 2,60%
STRETCH AT B. L. 3,60%

COLOURS to choose from:

DYNEEMA® SK78

DYNEEMA® SK78 - BREAKING LOAD AND WEIGHT COMPARATIVE TABLE

Ø	LIGHT 78 SINGLE BRAID			FOR ALL COVERS	BTEC/DYN	BTEC/DYN/ PET	BTEC/PET	KEV/DYN/ PET	CRD/ PET	PET
	NA48C00				NA48C35	NA48C85	NA48C86	NA48C78	NA48C24_CP	NA48C71
DIAM	B. L.	WEIGHT		B. L.	WEIGHT	WEIGHT	WEIGHT	WEIGHT	WEIGHT	WEIGHT
[mm]	[daN]	[g /m]		[daN]	[g /m]	[g /m]	[g /m]	[g /m]	[g /m]	[g /m]
1	**-**	-		**-**	-	-	-	-	-	-
1,5	**264**	1,60		**69**	-	-	-	-	-	-
2	**414**	2,50		**88**	-	-	-	-	-	-
2,5	**616**	3,08		**123**	-	-	-	-	-	-
3	**836**	3,70		**264**	-	-	-	-	6,80	6,87
3,5	**900**	4,90		**414**	9,28	9,24	9,37	9,10	9,10	9,19
4	**1.500**	7,40		**616**	12,44	12,42	12,56	12,20	12,20	12,32
5	**2.464**	9,60		**900**	18,90	18,81	19,07	18,89	18,70	18,89
6	**3.608**	14,10		**1.500**	25,76	25,65	26,01	25,25	25,49	25,76
7	**5.368**	21,00		**2.288**	37,07	36,92	37,43	36,37	36,69	37,07
8	**6.292**	27,40		**2.464**	48,38	48,20	48,86	47,42	47,89	48,38
9	**7.128**	35,00		**3.608**	58,33	58,12	58,91	57,17	57,74	58,33
10	**8.970**	42,10		**5.368**	68,28	68,03	68,95	66,92	67,59	68,28
11	**10.648**	49,00		**6.039**	-	-	-	-	-	-
12	**12.760**	55,90		**6.292**	98,00	97,58	97,94	96,03	96,99	97,97
13	**14.696**	61,25		**7.128**	-	-	-	-	-	-
14	**15.708**	66,60		**8.970**	132,40	131,62	133,70	130,00	131,09	132,41
15	**16.456**	71,50		**10.648**	-	-	-	-	-	-
16	**19.360**	76,40		**11.994**	166,25	165,60	167,90	163,00	164,58	166,25
17	**20.768**	88,20		**12.760**	-	-	-	-	-	-
18	**22.000**	100,00		**14.696**	182,10	181,40	183,91	178,50	180,29	182,10
20	**25.256**	123,50		**16.456**	240,00	233,65	241,96	234,83	237,18	239,57

NOTE ABOUT BREAKING LOAD AND DIAMETERS The average values shown above are derived from tests taken at Armare laboratory, on properly spliced new ropes, and may change without notice. Other diameters available on request. The static load of the rope must not exceed 20% of breaking load shown in the table. Knots may affect the breaking load of the rope with reductions of up to 60%. The splicing increases the diameter of the rope of about 1.5 times. The use and exposure to weather conditions, depending from the kind of rope and the time of exposure, can reduce the breaking loads of the ropes.

LIGHT 78 Single Braid

PRODUCT CODE NA48C00

100% SK78 WITHOUT TREATMENTS

CONSTRUCTION 12 plait with Dyneema® SK78.

USE Ideal to build the tack points on sails.

STANDARD DIAMETERS
From 1,5 to 30 mm
Other diameters on request

STRETCH AT 30% B. L. 2,80%
STRETCH AT B. L. 3,80%

COLOURS Natural white (without treatments).

White

SK78 - BTEC / DYN

PRODUCT CODE NA48C35

100% SK78

COVER Black Technora® / Dyneema®

CORE 12 plait with Dyneema® SK78.

USE Ideal for manoeuvres of high fatigue and cyclical mechanical stress, in particular where the wear of the cover is steadily present e.g. jib sheets, tacklines and staysail sheets.

STANDARD DIAMETERS
From 3,5 to 30 mm
Other diameters on request

STRETCH AT 30% B. L. 2,80%
STRETCH AT B. L. 3,80%

COLOURS Melange Natural Black Technora® / Dyneema®.

BTEC / DYN

SK78 - BTEC / DYN / PET

PRODUCT CODE NA48C85

100% SK78

COVER Black Technora® / Dyneema® / Polyester

CORE 12 plait with Dyneema® SK78.

USE It's simple to control and to release on winches. Ideal for jib and gennaker sheets, halyards and control lines.

STANDARD DIAMETERS
From 3,5 to 30 mm
Other diameters on request

STRETCH AT 30% B. L. 2,80%
STRETCH AT B. L. 3,80%

COLOURS Melange Black Technora® / Dyneema® / Polyester to choose from:

SK78 - BTEC / PET

PRODUCT CODE NA48C86

100% SK78

COVER Black Technora® / Polyester

CORE 12 plait with Dyneema® SK78.

USE This rope is used on monotypes, oceanic boats and on Super Yachts as sheets and halyards with a good grip and high chafe resistance.

STANDARD DIAMETERS
From 3,5 to 30 mm
Other diameters on request

STRETCH AT 30% B. L. 2,80%
STRETCH AT B. L. 3,80%

COLOURS Melange Black Technora® / Polyester to choose from:

SK78 - KEV / DYN / PET

PRODUCT CODE NA48C78

100% SK78

COVER Kevlar® / Dyneema® / Polyester

CORE 12 plait with Dyneema® SK78.

USE Ideal for manoeuvres of high fatigue and cyclical mechanical stress e.g. jib sheets, tacklines and staysail sheets.

STANDARD DIAMETERS
From 3,5 to 30 mm
Other diameters on request

STRETCH AT 30% B. L. 2,80%
STRETCH AT B. L. 3,80%

COLOURS Melange Kevlar® / Dyneema® / Polyester to choose from:

SK78 - CRD / PET

PRODUCT CODE NA48C24_CP

100% SK78

COVER Cordura® / Polyester

CORE 12 plait with Dyneema® SK78.

USE Excellent grip on stoppers and winches. It can be chosen either as halyard, as sheet and for all control lines thanks to its soft and grip touch.

STANDARD DIAMETERS
From 3 to 30 mm
Other diameters on request

STRETCH AT 30% B. L. 2,80%
STRETCH AT B. L. 3,80%

COLOURS Melange Cordura® / Polyester to choose from:

SK78 - PET

PRODUCT CODE NA48C71

100% SK78

COVER Polyester

CORE 12 plait with Dyneema® SK78.

USE Indicated for multiple uses: sheets, halyards and general running rigging.

STANDARD DIAMETERS
From 3 to 30 mm
Other diameters on request

STRETCH AT 30% B. L. 2,80%
STRETCH AT B. L. 3,80%

COLOURS to choose from:

VECTRAN® + PU

VECTRAN® + PU - BREAKING LOAD AND WEIGHT COMPARATIVE TABLE

Ø	VEC-TEC SINGLE BRAID			FOR ALL COVERS	BTEC/DYN	BTEC/DYN/ PET	BTEC/PET	KEV/DYN/ PET	CRD/ PET	PET
	NA55C00				NA55C35	NA55C85	NA55C86	NA55C78	NA55C24	NA55C71
DIAM	B. L.	WEIGHT		B. L.	WEIGHT	WEIGHT	WEIGHT	WEIGHT	WEIGHT	WEIGHT
[mm]	[daN]	[g /m]		[daN]	[g /m]	[g /m]	[g /m]	[g /m]	[g /m]	[g /m]
1	**-**	-		**-**	-	-	-	-	-	-
1,5	**-**	-		**-**	-	-	-	-	-	-
2	**430**	3,10		**160**	-	-	-	-	4,06	4,10
2,5	**640**	4,50		**220**	-	-	-	-	5,64	5,70
3	**860**	6,10		**430**	-	-	-	-	7,33	7,40
3,5	**1.350**	9,50		**640**	-	-	-	-	9,90	10,00
4	**1.880**	11,90		**860**	-	-	-	-	13,37	13,50
5	**2.760**	18,00		**1.350**	-	-	-	-	20,89	21,10
6	**3.800**	25,00		**1.795**	28,70	28,22	28,80	28,22	27,82	28,10
7	**-**	-		**-**	-	-	-	-	-	-
8	**6.760**	44,50		**2.760**	55,00	54,19	55,30	54,19	53,36	53,90
9	**-**	-		**-**	-	-	-	-	-	-
10	**10.000**	74,00		**5.300**	77,60	76,44	78,00	76,44	75,24	76,00
11	**-**	-		**-**	-	-	-	-	-	-
12	**12.540**	85,00		**7.970**	112,30	110,64	112,90	110,64	108,90	110,00
13	**-**	-		**-**	-	-	-	-	-	-
14	**15.450**	107,00		**10.000**	154,00	151,61	154,70	151,61	149,29	150,80
15	**-**	-		**-**	-	-	-	-	-	-
16	**18.530**	127,00		**12.540**	188,90	186,00	189,80	186,00	183,15	185,00
17	**-**	-		**-**	-	-	-	-	-	-
18	**20.900**	166,00		**15.450**	217,50	214,13	218,50	214,13	210,87	213,00
20	**23.360**	210,00		**18.530**	272,60	268,42	273,90	268,42	264,33	267,00

NOTE ABOUT BREAKING LOAD AND DIAMETERS The average values shown above are derived from tests taken at Armare laboratory, on properly spliced new ropes, and may change without notice. Other diameters available on request. The static load of the rope must not exceed 20% of breaking load shown in the table. Knots may affect the breaking load of the rope with reductions of up to 60%. The splicing increases the diameter of the rope of about 1.5 times. The use and exposure to weather conditions, depending from the kind of rope and the time of exposure, can reduce the breaking loads of the ropes.

VEC-TEC Single Braid

PRODUCT CODE NA55C00

100% VECTRAN · PU COATED TREATMENT

CONSTRUCTION 12 plait in Vectran® with polyurethane coating from diameter 8 (lower diameters without PU).

USE Optimal for steering gear and control systems, if protected from UV rays below deck or hidden inside of the mast.

STANDARD DIAMETERS
From 2 to 26 mm
Other diameters on request
No PU treatment from 2 to 6 mm diameters

STRETCH AT 30% B. L. 2,60%
STRETCH AT B. L. 3,60%

COLOURS

Vectran® Natural

Vectran® Silver Grey

VEC - BTEC / DYN

PRODUCT CODE NA55C35

100% VECTRAN · PU COATED TREATMENT

COVER Black Technora® / Dyneema®

CORE 12 plait in Vectran® with polyurethane coating from diameter 8 (lower diameters without PU).

USE Ideal for manoeuvres of high fatigue and cyclical mechanical stress, in particular where the wear of the cover is steadily present e.g. jib sheets, tacklines and staysail sheets.

STANDARD DIAMETERS
From 6 to 30 mm
Other diameters on request
No PU treatment from 2 to 6 mm diameters

STRETCH AT 30% B. L. 2,60%
STRETCH AT B. L. 3,60%

COLOURS Melange Natural Black Technora® / Dyneema®

BTEC / DYN

VEC - BTEC / DYN / PET

PRODUCT CODE NA55C85

100% VECTRAN PU COATED TREATMENT

COVER Black Technora® / Dyneema® / Polyester

CORE 12 plait in Vectran® with polyurethane coating from diameter 8 (lower diameters without PU).

USE It's simple to control and to release on winches. Ideal for jib and gennaker sheets, halyards and control lines.

STANDARD DIAMETERS
From 6 to 30 mm
Other diameters on request
No PU treatment from 2 to 6 mm diameters

STRETCH AT 30% B. L. 2,60%
STRETCH AT B. L. 3,60%

COLOURS Melange Black Technora® / Dyneema® / Polyester to choose from:

VEC - BTEC / PET

PRODUCT CODE NA55C86

100% VECTRAN PU COATED TREATMENT

COVER Black Technora® / Polyester

CORE 12 plait in Vectran® with polyurethane coating from diameter 8 (lower diameters without PU).

USE This rope is used on monotypes, oceanic boats and on Super Yachts as sheets and halyards with a good grip and high chafe resistance.

STANDARD DIAMETERS
From 6 to 30 mm
Other diameters on request
No PU treatment from 2 to 6 mm diameters

STRETCH AT 30% B. L. 2,60%
STRETCH AT B. L. 3,60%

COLOURS Melange Black Technora® / Polyester to choose from:

VEC - KEV / DYN / PET

PRODUCT CODE NA55C78

100% VECTRAN PU COATED TREATMENT

COVER Kevlar® / Dyneema® / Polyester

CORE 12 plait in Vectran® with polyurethane coating from diameter 8 (lower diameters without PU).

USE Ideal for manoeuvres of high fatigue and cyclical mechanical stress e.g. jib sheets, tacklines and staysail sheets.

STANDARD DIAMETERS
From 6 to 30 mm
Other diameters on request
No PU treatment from 2 to 6 mm diameters

STRETCH AT 30% B. L. 2,60%
STRETCH AT B. L. 3,60%

COLOURS Melange Kevlar® / Dyneema® / Polyester to choose from:

VEC - CRD / PET

PRODUCT CODE NA55C24

100% VECTRAN PU COATED TREATMENT

COVER Cordura® / Polyester

CORE 12 plait in Vectran® with polyurethane coating from diameter 8 (lower diameters without PU).

USE Excellent grip on stoppers and winches. It can be chosen either as halyard, as sheet and for all control lines thanks to its soft and grip touch.

STANDARD DIAMETERS
From 2 to 30 mm
Other diameters on request
No PU treatment from 2 to 6 mm diameters

STRETCH AT 30% B. L. 2,60%
STRETCH AT B. L. 3,60%

COLOURS Melange Cordura®/ Polyester to choose from:

VEC - PET

PRODUCT CODE NA55C71

100% VECTRAN PU COATED TREATMENT

COVER Polyester

CORE 12 plait in Vectran® with polyurethane coating from diameter 8 (lower diameters without PU).

USE Indicated for multiple uses: sheets, halyards and general running rigging.

STANDARD DIAMETERS
From 2 to 30 mm
Other diameters on request
No PU treatment from 2 to 6 mm diameters

STRETCH AT 30% B. L. 2,60%
STRETCH AT B. L. 3,60%
COLOURS to choose from:

Soft Braid
Performance

SOFT BRAID - BREAKING LOAD AND WEIGHT COMPARATIVE TABLE

Ø	SOFT BRAID 3 (NEW)		SOFT BRAID 4 (NEW)	
DIAM	B. L.	WEIGHT	B. L.	WEIGHT
[mm]	[daN]	[g /m]	[daN]	[g /m]
4	**430**	14,90	**430**	14,50
5	**690**	24,50	**690**	23,80
6	**1.000**	28,80	**1.000**	27,90
7	**1.450**	36,60	**1.450**	35,50
8	**2.100**	48,80	**2.100**	47,30
9	**3.000**	60,60	**3.000**	58,80
10	**4.000**	72,50	**4.000**	70,30
11	**5.000**	85,70	**5.000**	83,10

NOTE ABOUT BREAKING LOAD AND DIAMETERS The average values shown above are derived from tests taken at Armare laboratory, on properly spliced new ropes, and may change without notice. Other diameters available on request. The static load of the rope must not exceed 20% of breaking load shown in the table. Knots may affect the breaking load of the rope with reductions of up to 60%. The splicing increases the diameter of the rope of about 1.5 times. The use and exposure to weather conditions, depending from the kind of rope and the time of exposure, can reduce the breaking loads of the ropes.

Soft Braid 3 - 4
Dinghies
and monotypes

Soft Braid 3 and 4 are two performance ropes, both with core in Dyneema® SK78 + PU and cover in Dyneema / Polyester, and Dyneema® / Polyester / Kevlar® respectively. Both ropes are resistant to abrasion and have an excellent behavior during fast surges, a feature that makes them the perfect choice for competitive use such as sheets and control lines on dinghies and monotypes.

Soft Braid 3 NEW
PET + GRIP / DYN
PRODUCT CODE NA57C82

100% SK78 · PU COATED TREATMENT

CONSTRUCTION Double braid
COVER PET + Grip / Dyneema®
CORE 12 strand braid, made with Dyneema® SK78, impregnated with PU coating.

FEATURES AND USE Sliding and abrasion resistant cover, good breaking load and low elongation core. Destined to sheets and control lines with frequent running.

STANDARD DIAMETERS From 4 to 11 mm
STRETCH AT 30% B. L. 3,10%
STRETCH AT B. L. 3,70%

COLOURS

Soft Braid 4 NEW
PET + GRIP / DYN / KEV
PRODUCT CODE NA57C83

100% SK78 · PU COATED TREATMENT

CONSTRUCTION Double braid
COVER PET + Grip / Dyneema® / Kevlar®
CORE 12 strand braid, made with Dyneema® SK78, impregnated with PU coating.

FEATURES AND USE Sliding cover with excellent resistance to quick surge; optimal duration against abrasions, thanks to the Kevlar® fiber. Low elongation core with good breaking load. Destined to sheets with frequent and fast running.

STANDARD DIAMETERS From 4 to 11 mm
STRETCH AT 30% B. L. 3,10%
STRETCH AT B. L. 3,70%

COLOURS

Soft Braid 5

Extreme use on high performance monotypes

Soft Braid 5 is characterized by the exclusive Super Shape construction with anti-flattening insert. So these ropes are intended for use as sheets on ratchet blocks, where they are subjected to high localized wear; the special Super Shape treatment prevents triangulation.They are the ideal choice for professional monotypes such as Melges, J-70 class and others.

SUPER SHAPE		
Ø	SOFT BRAID 5	
DIAM	B. L.	WEIGHT
[mm]	[daN]	[g /m]
4	**-**	-
5	**-**	-
6	**800**	30,20
7	**1.100**	38,40
8	**1.530**	51,20
9	**2.300**	63,60
10	**3.230**	76,10
11	**4.400**	90,00

NOTE ABOUT BREAKING LOAD AND DIAMETERS The average values shown above are derived from tests taken at Armare laboratory, on properly spliced new ropes, and may change without notice. Other diameters available on request. The static load of the rope must not exceed 20% of breaking load shown in the table. Knots may affect the breaking load of the rope with reductions of up to 60%. The splicing increases the diameter of the rope of about 1.5 times. The use and exposure to weather conditions, depending from the kind of rope and the time of exposure, can reduce the breaking loads of the ropes.

SUPER SHAPE

Soft Braid 5

PET + GRIP / DYN

PRODUCT CODE NA26C82

100% SK78 · PU COATED TREATMENT · SUPER SHAPE

CONSTRUCTION Double braid
COVER PET + Grip / Dyneema®
CORE 12 strand braid, made with Dyneema® SK78, impregnated with PU coating and anti-flattening insert.

FEATURES AND USE Sliding cover and resistant to abrasions. Super Shape core with anti-flattening insert. For sheets which are designed to perfectly work on winches and blocks and do not create loops and kinks.

STANDARD DIAMETERS From 6 to 11 mm
STRETCH AT 30% B. L. 2,70%
STRETCH AT B. L. 3,40%

COLOURS

Cruising line

ARMARE CRUISING LINE ROPES ARE THE BEST CHOICE FOR ALL THE RUNNING RIGGING OF CRUISING BOATS. THESE LINES DERIVE FROM THE EXPERIENCE GAINED THROUGH RACINGS, REFINED WITH THE BEST CONSTRUCTION TECHNIQUES, IN ORDER TO GET HIGH PERFORMANCE, QUALITY, DURABILITY AND SAFETY WHILE KEEPING THE COST OF THE FINAL PRODUCT UNDER CONTROL.

The different compositions of the cores, some with high modulus fibers such as Dyneema® SK78, matched with specific protective covers, make up a full and highly differentiated range of ropes, that can be used as sheets, halyards, tackles, vang, or after guys. In order to help shipowners and professionals in the choice of the most suitable rope, every product is completed by specific use tips. Furthermore, the possibility to make custom-color ropes while keeping unchanged the qualitative features, allows us to meet any type of aesthetic requirement, with exceptional results of application.

Fast cruiser

Destination
Cruiser Boats
Club Racing Boats
Fast Cruiser Boats

Use
Halyards / Sheets

Products
Light 78 Plus
Light 78 Fast
Topspeed
Speedplus

Daily cruiser

Destination
Cruiser Boats
Daily Cruiser Boats

Use
Sheets

Products
Speedcruise

Classic cruiser

Destination
Classic Cruiser Boats

Use
Sheets / Halyards

Products
Star Plus
Star
Bora
Static
Armony

CRUISING - BREAKING LOAD AND WEIGHT COMPARATIVE TABLE

Ø	LIGHT 78 PLUS		LIGHT 78 FAST		TOPSPEED		SPEEDPLUS		SPEEDCRUISE		STAR PLUS		STAR		BORA		STATIC		ARMONY	
	NA48C24		NA48C71_FST		NA89C24		NA36C24		NA36C71		NA37C24		NA44		N003		NA38		NA71	
DIAMETER	B. L.	WEIGHT	B. L.	WEIGHT	B. L.	WEIGHT	B. L.	WEIGHT	B. L.	WEIGHT	B. L.	WEIGHT	B. L.	WEIGHT	B. L.	WEIGHT	B. L.	WEIGHT	B. L.	WEIGHT
[mm]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]
1	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-
1,5	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-
2	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-
2,5	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-
3	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**260**	11,00	**250**	10,00	**-**	-	**-**	-	**-**	-
3,5	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-
4	**600**	12,08	**600**	12,20	**-**	-	**-**	-	**-**	-	**470**	15,84	**450**	15,00	**340**	16,00	**-**	-	**250**	10,00
5	**880**	18,51	**880**	18,70	**-**	-	**-**	-	**-**	-	**680**	24,75	**650**	23,00	**574**	23,00	**-**	-	**395**	18,00
6	**1.400**	25,24	**1.400**	25,50	**1.150**	26,42	**1.100**	25,74	**1.100**	26,00	**945**	30,69	**900**	30,00	**834**	29,00	**790**	32,00	**560**	22,00
7	**2.059**	36,33	**2.059**	36,70	**-**	-	**-**	-	**-**	-	**1.260**	39,60	**1.200**	39,00	**-**	-	**-**	-	**-**	-
8	**2.415**	47,42	**2.415**	47,90	**1.933**	47,75	**1.850**	46,53	**1.850**	47,00	**1.630**	49,50	**1.550**	49,00	**1.111**	50,00	**1.350**	55,00	**1.000**	41,00
9	**3.150**	57,17	**3.150**	57,70	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-
10	**4.600**	66,92	**4.600**	67,60	**3.031**	74,17	**2.900**	62,65	**2.900**	73,00	**2.570**	75,24	**2.450**	75,00	**2.100**	75,00	**2.100**	78,00	**1.500**	62,00
11	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-
12	**6.120**	96,03	**6.120**	97,00	**5.016**	96,52	**4.800**	97,60	**4.800**	95,00	**3.460**	103,95	**3.300**	103,00	**2.793**	104,00	**2.900**	105,00	**1.950**	86,00
13	**-**	-	**-**	-	**-**		**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-
14	**8.791**	129,79	**8.791**	131,10	**6.375**	136,14	**6.100**	132,66	**6.100**	134,00	**4.700**	147,51	**4.500**	148,00	**3.277**	145,00	**4.050**	145,00	**2.500**	115,00
15	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-
16	**11.755**	162,95	**11.755**	164,60	**8.778**	174,75	**8.400**	170,28	**8.400**	159,00	**6.300**	197,01	**6.000**	198,00	**4.615**	187,00	**5.200**	188,00	**3.000**	143,00
18	**14.402**	178,50	**14.402**	180,30	**10.973**	225,55	**10.500**	219,78	**10.500**	222,00	**7.700**	237,60	**7.400**	240,00	**5.433**	242,00	**-**	-	**3.600**	202,00
20	**16.127**	234,83	**16.127**	237,20	**12.645**	282,45	**12.100**	275,22	**12.100**	278,00	**9.550**	277,20	**9.100**	280,00	**-**	-	**-**	-	**4.200**	250,00

NOTE ABOUT BREAKING LOAD AND DIAMETERS The average values shown above are derived from tests taken at Armare laboratory, on properly spliced new ropes, and may change without notice. Other diameters available on request. The static load of the rope must not exceed 20% of breaking load shown in the table. Knots may affect the breaking load of the rope with reductions of up to 60%. The splicing increases the diameter of the rope of about 1.5 times. The use and exposure to weather conditions, depending from the kind of rope and the time of exposure, can reduce the breaking loads of the ropes.

Light 78 Plus

PRODUCT CODE NA48C24

100% SK78

CONSTRUCTION Double braid
COVER Cordura® / Polyester
CORE Dyneema® SK78

FEATURES AND USE It guarantees lightness, high breaking load, minimum elongation and excellent grip on stopper and winch, thanks to the use of special anti-slip fibers. Ideal as halyard, but suitable also as sheet, due to its handy construction.

STANDARD DIAMETERS
From 4 to 22 mm
Other diameters on request

STRETCH AT 30% B. L. 2,80%
STRETCH AT B. L. 3,80%

COLOURS Solid colour white (CRD/ white PET) or Melange white / colored PET:

Light 78 Fast

PRODUCT CODE NA48C71_FST

100% SK78

CONSTRUCTION Double braid
COVER Polyester
CORE Dyneema® SK78

FEATURES AND USE High breaking load, excellent stability under constant load, minimal elongation. Suggested use for halyard, topping, tackle and control line.

STANDARD DIAMETERS
From 4 to 22 mm
Other diameters on request

STRETCH AT 30% B. L. 2,80%
STRETCH AT B. L. 3,80%

COLOURS Solid colour

Topspeed

PRODUCT CODE NA89C24

100% HMPE
PU COATED TREATMENT

CONSTRUCTION Double braid
COVER Cordura® / Polyester
CORE HMPE + PU

FEATURES AND USE More shape stability and core duration, thanks to the impregnation with a special PU Coating, which brings a significant increase of the breaking load and a reduction of the elongation. Recommended for all those maneuvers on cruise boats which are exposed to intensive use.

STANDARD DIAMETERS
From 4 to 20 mm
Other diameters on request

STRETCH AT 30% B. L. 3,70 %
STRETCH AT B. L. 5,25 %

COLOURS Solid colour white (CRD/ white PET) or Melange white / colored PET:

Speedplus

PRODUCT CODE NA36C24

100% HMPE

CONSTRUCTION Double braid
COVER Cordura® / Polyester
CORE HMPE

FEATURES AND USE It is the best possible quality/price compromise of our Cruising Line. It has as a very good breaking load (higher than products in Polyester), a low elongation and a good grip thanks to the special anti-slip cover. It is suitable to be used either as halyard or as sheet.

STANDARD DIAMETERS
From 6 to 22 mm
Other diameters on request

STRETCH AT 30% B. L. 4,00%
STRETCH AT B. L. 5,60%

COLOURS Solid colour white (CRD/ white PET) or Melange white / colored PET:

Speedcruise

PRODUCT CODE NA36C71

100% HMPE

CONSTRUCTION Double braid
COVER Polyester
CORE HMPE

FEATURES AND USE Good breaking load, low elongation, durability. Excellent quality / price ratio. Suggested use for halyard, afterguy, sheet and tackle.

STANDARD DIAMETERS
From 6 to 22 mm
Other diameters on request

STRETCH AT 30% B. L. 4,00%
STRETCH AT B. L. 5,60%

COLOURS Solid colour - Mix - Melange - Marker

Star Plus

PRODUCT CODE NA37C24

CONSTRUCTION Prestretched double braid
COVER Cordura® / Polyester
CORE Polyester

FEATURES AND USE Stable but flexible, it withstands the use on stoppers and winches and preserves an unchanged softness. It has a better grip than Star, thanks to the use of special anti-slip fibres. It is recommended to be used as halyard, running line, tackle and main outhaul.

STANDARD DIAMETERS
From 3 to 20 mm
Other diameters on request

STRETCH AT 30% B. L. 5,5%
STRETCH AT B. L. 12,00%

COLOURS Solid colour white (CRD/ white PET) or Melange white / colored PET:

Star

PRODUCT CODE NA44

CONSTRUCTION Prestretched double braid
COVER Polyester
CORE Polyester

FEATURES AND USE Soft and flexible, high durability to use and resistance to abrasion. It remains supple over time. Recommended use: halyard, sheet, tackle and control line.

STANDARD DIAMETERS
From 3 to 26 mm
Other diameters on request

STRETCH AT 30% B. L. 7,00%
STRETCH AT B. L.13,50%

COLOURS Solid colour - Mix - Melange - Marker.

Bora

PRODUCT CODE N003

CONSTRUCTION Heat fixed double braid
COVER Polyester
CORE Polyester

FEATURES AND USE Excellent resistance to abrasion due to its compact design. Good overall qualities of breaking load and elongation. Suggested to be used as halyard, topping, tackle and control line.

STANDARD DIAMETERS
From 4 to 18 mm
Other diameters on request

STRETCH AT 30% B. L. 6,20%
STRETCH AT B. L. 12,80%

COLOURS

Static

PRODUCT CODE NA38

CONSTRUCTION Double braid
COVER Polyester
CORE Unidirectional Polyester yarn core

FEATURES AND USE Very static unidirectional construction, wear-resistant in stoppers and winches, more rigid than the Star. Excellent quality / price ratio.
Used as halyard, topping, afterguy.

STANDARD DIAMETERS
From 6 to 16 mm
Other diameters on request

STRETCH AT 30% B. L. 5,00%
STRETCH AT B. L. 11,50%

COLOURS

Armony

PRODUCT CODE NA71

CONSTRUCTION Double braid
COVER Matt Polyester
CORE Polyester

FEATURES AND USE The traditional seafarers choice, thanks to its easy grip and guaranteed hold even when the rope is wet. Good rubbing resistance. Suggested use on cruising boats and dinghies as sheet, control line and reef line.

STANDARD DIAMETERS
From 4 to 20 mm
Other diameters on request

STRETCH AT 30% B. L. 8,00%
STRETCH AT B. L. 13,50%

COLOURS

Kite & Surf line

KITE LINES, SPECIFICALLY DEVELOPED AND DESIGNED FOR KITEBOARDERS, BOTH SPORTY AND PROFESSIONAL. TESTS MADE IN LABORATORY AS WELL AS A LOT OF SESSION DAYS OF FIELD EXPERIENCE PERFORMED BY THE BEST ATHLETES, HAVE GIVEN ARMARE AN IMPORTANT KNOWLEDGE AND KNOW-HOW TO ACHIEVE A COMPLETE LINE OF PRODUCTS.

THESE ROPES, WITH VERY HIGH BREAKING LOAD AND LOW STRETCH, ARE STUDIED TO HAVE A GREAT ABRASION RESISTANCE AND TO EXALT THE PERFORMANCE OF THE KITE. TAKE THE OPPORTUNITY TO FULLY ENJOY YOUR FAVORITE SPORT BY CHOOSING QUALIFIED ARMARE ROPES PRODUCTS.

Dyneforce 99 for Kite

PRODUCT CODE NA20C00

100% SK99 · HPS TREATMENT · PU COATED TREATMENT

COMPOSITION Single braid in Dyneema® SK99 + HPS and PU coating treatment.

USE Ideal to be used on control lines of professional kitesurfs.

ELONGATION AT WORKING LOAD 1,45%

DIAM	B. L.	ROLL LENGHT
[mm]	[daN]	[m]
1	199	200
1,25	314	200
1,5	450	200

COLOURS Solid colour

White · Black · Silver Grey

Kitedyne HPS

PRODUCT CODE TT77C00

100% SK75 · HPS TREATMENT · PU COATED TREATMENT

COMPOSITION Single braid in Dyneema® SK75 + HPS and PU coating treatment.

USE Ideal to be used on control lines of performace kitesurfs.

ELONGATION AT WORKING LOAD 1,70%

DIAM	B. L.	ROLL LENGHT
[mm]	[daN]	[m]
1,3	210	300
1,5	275	200
1,7	305	200
1,9	385	200

COLOURS Solid colour

White · Black · Silver Grey · Yellow · Red · Green · Light Blue

Kitedyne

PRODUCT CODE TT67C00

100% SK75 · PU COATED TREATMENT

COMPOSITION Single braid in Dyneema® SK75 + PU coating treatment.

USE Ideal to be used on control lines of kitesurfs.

ELONGATION AT WORKING LOAD 1,95%

DIAM	B. L.	ROLL LENGHT
[mm]	[daN]	[m]
0,3	18	500
0,4	39	500
0,5	50	500
0,6	70	400
0,8	78	400
0,9	100	400
1	140	300
1,3	195	300
1,5	250	200
1,7	287	200
1,9	315	200

COLOURS Solid colour

White · Black · Silver Grey · Yellow · Red · Green · Light Blue

Depower

PRODUCT CODE TT94C48

100% SK78

COMPOSITION
Round braid in 100% Dyneema® SK78.

USE Used to hauling out/down the sail during Windsurfing, this rope keeps its round shape.

DIAM	B. L.	ROLL LENGHT
[mm]	[daN]	[m]
3,8	620	200
4,5	760	200

COLOURS Solid colour

White

Classic line

COMPLETE RANGE OF ROPES FOR THE MOORING, THE ANCHORING AND THE RUNNING RIGGING OF CLASSIC SAILING BOATS. VINTAGE BOATS OFTEN NEED ROPES OF A TECHNICAL AND QUALITATIVE LEVEL WHICH IS SUPERIOR TO THOSE OF MODERN BOATS. THIS IS BECAUSE THE VOLUMES, THE WATER LINES, THE WEIGHTS, THE SAIL AREA AND THE DECK RIGGING INFLICT A HEAVY DUTY ON RIGGING LINES.

CLASSIC RUNNING RIGGING - BREAKING LOAD AND WEIGHT COMPARATIVE TABLE

Ø	DYN 78 HPS PU - PET		LIGHT 78 FAST		TOPSPEED		STAR		STAR PLUS	
	NA58C71		NA48C71_FST		NA89C24		NA44		NA37C24	
DIAMETER	B. L.	WEIGHT	B. L.	WEIGHT	B. L.	WEIGHT	B. L.	WEIGHT	B. L.	WEIGHT
[mm]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]
1	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-
1,5	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-
2	**243**	4,70	**-**	-	**-**	-	**-**	-	**-**	-
2,5	**337**	5,70	**-**	-	**-**	-	**-**	-	**-**	-
3	**500**	7,50	**-**	-	**-**	-	**250**	10,00	**260**	11,00
3,5	**708**	9,20	**-**	-	**-**	-	**-**	-	**-**	-
4	**950**	12,40	**600**	12,20	**-**	-	**450**	15,00	**470**	15,84
5	**1.386**	19,00	**880**	18,70	**-**	-	**650**	23,00	**680**	24,75
6	**2.250**	26,00	**1.400**	25,50	**1.150**	26,42	**900**	30,00	**945**	30,69
7	**2.669**	36,00	**2.059**	36,70	**-**	-	**1.200**	39,00	**1.260**	39,60
8	**3.087**	46,80	**2.415**	47,90	**1.933**	47,75	**1.550**	49,00	**1.630**	49,50
9	**4.995**	60,00	**3.150**	57,70	**-**	-	**-**	-	**-**	-
10	**5.700**	71,00	**4.600**	67,60	**3.031**	74,17	**2.450**	75,00	**2.570**	75,24
11	**6.900**	87,00	**-**	-	**-**	-	**-**	-	**-**	-
12	**8.550**	101,00	**6.120**	97,00	**5.016**	96,52	**3.300**	103,00	**3.460**	103,95
13	**9.716**	116,90	**-**	-	**-**		**-**	-	**-**	-
14	**10.100**	148,40	**8.791**	131,10	**6.375**	136,14	**4.500**	148,00	**4.700**	147,51
15	**11.600**	164,20	**-**	-	**-**	-	**-**	-	**-**	-
16	**13.100**	180,00	**11.755**	164,60	**8.778**	174,75	**6.000**	198,00	**6.300**	197,01
18	**16.000**	212,00	**14.402**	180,30	**10.973**	225,55	**7.400**	240,00	**7.700**	237,60
20	**20.000**	265,00	**16.127**	237,20	**12.645**	282,45	**9.100**	280,00	**9.550**	277,20

Note: special colors for Classic line only hemp and beige

NOTE ABOUT BREAKING LOAD AND DIAMETERS The average values shown above are derived from tests taken at Armare laboratory, on properly spliced new ropes, and may change without notice. Other diameters available on request. The static load of the rope must not exceed 20% of breaking load shown in the table. Knots may affect the breaking load of the rope with reductions of up to 60%. The splicing increases the diameter of the rope of about 1.5 times. The use and exposure to weather conditions, depending from the kind of rope and the time of exposure, can reduce the breaking loads of the ropes.

Dyn 78 HPS PU - Pet

PRODUCT CODE NA58C71

100% SK78 · HPS TREATMENT · PU COATED TREATMENT

CONSTRUCTION Double braid

COVER Polyester

CORE Dyneema® SK78 + HPS + PU treatment

FEATURES AND USE Maximum breaking load, excellent stability and strength, minimum elongation and lightweight.

Suggested use for halyards, sheets, afterguys, runner backstays and tackles. Large diameters could be used on Super Yachts.

STANDARD DIAMETERS
From 2 to 30 mm
Other diameters on request

STRETCH AT 30% B. L. 2,35%
STRETCH AT B. L. 3,35%

COLOURS

Hemp Beige

Light 78 Fast

PRODUCT CODE NA48C71_FST

100% SK78

CONSTRUCTION Double braid

COVER Polyester

CORE Dyneema® SK78

FEATURES AND USE High breaking load, excellent stability under constant load, minimal elongation.

Suggested use for halyards, toppings, tackles and control lines.
Large diameters could be used on Super Yachts.

STANDARD DIAMETERS
From 4 to 22 mm
Other diameters on request

STRETCH AT 30% B. L. 2,80%
STRETCH AT B. L. 3,80%

COLOURS

Hemp Beige

Topspeed

PRODUCT CODE NA89C24

100% HMPE · PU COATED TREATMENT

CONSTRUCTION Double braid

COVER Cordura® / Polyester

CORE HMPE + PU

FEATURES AND USE More shape stability and core duration, thanks to the impregnation with a special PU Coating, which brings a significant increase of the breaking load and a reduction of the elongation. Recommended for all those maneuvers on cruise boats which are exposed to intensive use.

STANDARD DIAMETERS
From 4 to 20 mm
Other diameters on request

STRETCH AT 30% B. L. 3,70 %
STRETCH AT B. L. 5,25 %

COLOURS Solid colour white (CRD/ white PET) or Melange white / colored PET:

Hemp Beige

Star

PRODUCT CODE NA44

CONSTRUCTION Prestretched double braid

COVER Polyester

CORE Polyester

FEATURES AND USE Soft and flexible, high durability to use and resistance to abrasion. It remains supple over time.

Suggested use for halyards, sheets, tackles and control lines. Large diameters could be used on Super Yachts.

STANDARD DIAMETERS
From 3 to 26 mm
Other diameters on request

STRETCH AT 30% B. L. 7,00%
STRETCH AT B. L. 13,50%

COLOURS

Hemp Beige

Star Plus

PRODUCT CODE NA37C24

CONSTRUCTION Prestretched double braid

COVER Cordura® / Polyester

CORE Polyester

FEATURES AND USE Stable but flexible, it withstands the use on stoppers and winches and preserves an unchanged softness. It has a better grip than Star, thanks to the use of special anti-slip fibres. It is recommended to be used as halyard, running line, tackle and main outhaul.

STANDARD DIAMETERS
From 3 to 20 mm
Other diameters on request

STRETCH AT 30% B. L. 5,5%
STRETCH AT B. L. 12,00%

COLOURS Solid colour white (CRD/ white PET) or Melange white / colored PET:

Hemp Beige

Soft Braid
Classic

SOFT BRAID WITH EXCELLENT GRIP, IDEAL ON CLASSIC AND VINTAGE YACHT, TO BE USED AS SHEETS AND CONTROL LINE.

CIME SOFT BRAID - BREAKING LOAD AND WEIGHT COMPARATIVE TABLE

Ø	SOFT BRAID 1		SOFT BRAID 2		SOFT BRAID 3 NEW		SOFT BRAID 4 NEW	
DIAM	B. L.	WEIGHT	B. L.	WEIGHT	B. L.	WEIGHT	B. L.	WEIGHT
[mm]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]
4	**280**	15,00	**280**	14,60	**430**	14,90	**430**	14,50
5	**420**	25,00	**420**	24,30	**690**	24,50	**690**	23,80
6	**760**	29,00	**760**	28,10	**1.000**	28,80	**1.000**	27,90
7	**1.100**	37,00	**1.100**	35,90	**1.450**	36,60	**1.450**	35,50
8	**1.550**	48,00	**1.550**	46,60	**2.100**	48,80	**2.100**	47,30
9	**2.100**	61,00	**2.100**	59,20	**3.000**	60,60	**3.000**	58,80
10	**2.450**	73,00	**2.450**	70,80	**4.000**	72,50	**4.000**	70,30
11	**3.300**	86,50	**3.300**	83,90	**5.000**	85,70	**5.000**	83,10

NOTA SUI CARICHI DI ROTTURA E DIAMETRI
I valori medi indicati sono ricavati dai test del laboratorio Armare su cime nuove, adeguatamente impiombate e possono essere variati senza alcun preavviso. Sono disponibili altri diametri su richiesta. Il carico statico della cima non deve superare il 20% del carico di rottura indicato in tabella. Il nodo pregiudica il carico di rottura con riduzione fino al 60%. L'impiombatura aumenta il diametro di circa 1,5 volte. L'esposizione agli agenti atmosferici determina riduzioni del carico di rottura delle cime, a seconda dell'intensità e durata della stessa e anche in base alla composizione e costruzione del prodotto.

Soft Braid 1 - 4

Soft Braid 1 and 2 are manufactured with a polypropylene core and differ in the cover, in Polyester or Dyneema® / Polyester respectively. Both ropes have the special “Grip” treatment which makes them excellent for bare hand use.

Soft Braid 3 and 4 are two performance ropes, both with core in Dyneema® SK78 + PU and cover in Dyneema / Polyester, and Dyneema® / Polyester / Kevlar® respectively. Both ropes are resistant to abrasion and have an excellent behavior during fast surges, a feature that makes them the perfect choice for use such as sheets and control lines.

Soft Braid 1

PET + GRIP

PRODUCT CODE NA63C81

CONSTRUCTION Double braid
COVER Polyester + Grip
CORE Polypropylene Braid

FEATURES AND USE Good quality cover, light core with low breaking load and medium elongation. Suitable for applications that do not need particular performance and require to use the rope both by bare hand and on stoppers (for example control lines of dinghies and small boats). Being easily spliceable it can also be used as closed circuits on manual furlers.

STANDARD DIAMETERS From 4 to 11 mm
STRETCH AT 30% B. L. 8,00%
STRETCH AT B. L. 15,00%

COLOURS

Silver Grey | Hemp | Beige

Soft Braid 2

PET + GRIP / DYN

PRODUCT CODE NA63C82

CONSTRUCTION Double braid
COVER Dyneema® / Polyester + Grip
CORE Polypropylene Braid

FEATURES AND USE The introduction of Dyneema® combined with Polyester results in a sliding cover that is more resistant to abrasion, but always with a light weight polypropylene core with low breaking load and average elongation. Aimed at general use, but with frequent runnings, it is a cheaper alternative as a sheet for dinghies and small boats.

STANDARD DIAMETERS From 4 to 11 mm
STRETCH AT 30% B. L. 8,00%
STRETCH AT B. L. 15,00%

COLOURS

Silver Grey | Hemp | Beige

Soft Braid 3

NEW

PET + GRIP / DYN

PRODUCT CODE NA57C82

100% SK78 | PU COATED TREATMENT

CONSTRUCTION Double braid
COVER PET + Grip / Dyneema®
CORE 12 strand braid, made with Dyneema® SK78, impregnated with PU coating.

FEATURES AND USE Sliding and abrasion resistant cover, good breaking load and low elongation core. Destined to sheets and control lines with frequent running.

STANDARD DIAMETERS From 4 to 11 mm
STRETCH AT 30% B. L. 3,10%
STRETCH AT B. L. 3,70%

COLOURS

Silver Grey | Hemp | Beige

Soft Braid 4

NEW

PET + GRIP / DYN / KEV

PRODUCT CODE NA57C83

100% SK78 | PU COATED TREATMENT

CONSTRUCTION Double braid
COVER PET + Grip / Dyneema® / Kevlar®
CORE 12 strand braid, made with Dyneema® SK78, impregnated with PU coating.

FEATURES AND USE Sliding cover with excellent resistance to quick surge; optimal duration against abrasions, thanks to the Kevlar® fiber. Low elongation core with good breaking load. Destined to sheets with frequent and fast running.

STANDARD DIAMETERS From 4 to 11 mm
STRETCH AT 30% B. L. 3,10%
STRETCH AT B. L. 3,70%

COLOURS

Silver Grey | Hemp | Beige

Classic Mooring line

THE QUALITY AND TECHNOLOGY OF ARMARE MOORING ROPES FOR A LINE SPECIALLY DEDICATED TO CLASSIC AND VINTAGE SAILING BOATS.

CLASSIC MOORING ROPES - BREAKING LOAD AND WEIGHT COMPARATIVE TABLE

Ø	STORM LINE		ROUND LINE		SQUARE LINE		SEA KING	
	N020		NA40		NA41		NA42	
DIAMETRO	B. L.	PESO	B. L.	PESO	B. L.	PESO	B. L.	PESO
[mm]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]
2,5	**-**	-	**-**	-	**-**	-	**-**	-
3	**-**	-	**-**	-	**-**	-	**300**	9,00
3,5	**-**	-	**-**	-	**-**	-	**-**	-
4	**-**	-	**-**	-	**-**	-	**470**	16,00
5	**-**	-	**-**	-	**-**	-	**600**	22,00
6	**-**	-	**-**	-	**-**	-	**700**	28,00
7	**-**	-	**-**	-	**-**	-	**-**	-
8	**2.000**	46,00	**-**	-	**-**	-	**1.270**	48,00
9	**-**	-	**-**	-	**-**	-	**-**	-
10	**2.650**	68,00	**-**	-	**1.600**	71,00	**1.680**	70,00
11	**-**	-	**-**	-	**-**	-	**-**	-
12	**3.500**	97,00	**-**	-	**2.100**	92,00	**2.800**	103,00
14	**4.200**	134,00	**-**	-	**2.900**	128,00	**3.600**	140,00
16	**4.900**	144,00	**4.160**	170,00	**3.500**	152,00	**4.300**	185,00
18	**5.400**	188,00	**5.018**	195,00	**4.100**	170,00	**5.400**	230,00
20	**8.500**	288,00	**5.460**	240,00	**4.500**	225,00	**6.700**	290,00
22	**11.600**	365,00	**6.045**	305,00	**5.000**	255,00	**8.300**	320,00
24	**13.500**	441,00	**6.890**	350,00	**5.700**	290,00	**9.700**	437,00
26	**14.600**	510,00	**8.099**	421,00	**6.500**	360,00	**11.100**	500,00
28	**18.500**	575,00	**10.465**	550,00	**8.400**	380,00	**12.050**	565,00
30	**20.000**	640,00	**11.648**	630,00	**9.650**	470,00	**13.400**	650,00
32	**23.600**	890,00	**12.350**	710,00	**10.870**	560,00	**15.400**	740,00
36	**25.500**	1.130,00	**15.600**	850,00	**13.700**	640,00	**19.000**	900,00
40	**31.000**	1.280,00	**17.500**	1.160,00	**15.580**	830,00	**23.500**	1.150
44	**36.000**	1.470,00	**20.000**	1.450,00	**19.400**	1.050,00	**-**	-
48	**40.800**	1.760,00	**-**	-	**23.300**	1.200,00	**-**	-
52	**49.900**	2.050,00	**-**	-	**28.100**	1.320,00	**-**	-

Nota: cime disponibili nei colori canapa e beige

NOTA SUI CARICHI DI ROTTURA E DIAMETRI I valori medi indicati sono ricavati dai test del laboratorio Armare su cime nuove, adeguatamente impiombate e posso variati senza alcun preavviso. Sono disponibili altri diametri su richiesta. Il carico statico della cima non deve superare il 20% del carico di rottura indicato in tabella. Il pregiudica il carico di rottura con riduzione fino al 60%. L'impiombatura aumenta il diametro di circa 1,5 volte. L'esposizione agli agenti atmosferici determina riduzion di rottura delle cime, a seconda dell'intensità e durata della stessa e anche in base alla composizione e costruzione del prodotto.

Storm Line

PRODUCT CODE N020

CONSTRUCTION
Balanced twist Polyester braided core, Polyester cover

FEATURES AND USE
Ideal for Super Yachts but also for emergency or long moorings of small and medium sized boats.

STANDARD DIAMETERS
From 8 to 52 mm

COLOURS

Hemp Beige

Round Line

PRODUCT CODE NA40

CONSTRUCTION
12 strand braid in Polyester

FEATURES AND USE
For the mooring of small boats to Super Yachts. Always smooth, even after prolonged use. Easy to splice.

STANDARD DIAMETERS
From 16 to 44 mm

COLOURS

Hemp Beige

Square Line

PRODUCT CODE NA41

CONSTRUCTION
8 strand braid in Polyester

FEATURES AND USE
Commonly used for the mooring of all types of boats up to Super Yachts, anchoring as well as temporary and long moorings of medium and small boats.

STANDARD DIAMETERS
From 10 to 52 mm

COLOURS

Hemp Beige

Sea King

PRODUCT CODE NA42

CONSTRUCTION
3 strand rope with balanced torsion, double twist construction in Polyester

FEATURES AND USE
This is the best choice for permanent moorings, for mooring on mooring posts and for all types of boats.

STANDARD DIAMETERS
From 3 to 40 mm

COLOURS

Hemp Beige

Mooring line

THE MOORING OF ANY TYPE OF BOAT IS A MATTER OF CRUCIAL IMPORTANCE. IN FACT IT HAS TO GUARANTEE THE SAFETY OF THE CREW, OF THE BOAT AND OF ANY OTHER NEARBY BOAT. AMONG THE WIDE RANGE OF ARMARE PROPOSALS FOR MOORING, IT IS EASY TO FIND THE MOST SUITABLE PRODUCT FOR ANY NEED, FOR FIXED OR FLYING MOORINGS, OR FOR SECURE ANCHORINGS.

Solutions for both sailing as motor boats

A huge range of custom-made mooring ropes, with excellent performance and durability. Special handcrafted finishing and protections, unique custom colours, high breaking load and light weight are the features of this line, that make it suitable for any application, in particular for the mooring of Super Yachts, where extraordinary high loads are required. Some articles are also available in Hemp colour, especially made to be used on classic and vintage boats (more information can be found on the part “Classic Line” of this catalogue).

Available manifactures

- Splicing on stainless-steel thimble
- Handmade finishing with Cordura® heavy fabric
- Handmade leather finishing
- Splicing with loop of every size
- Possibility of embroideries on every type of protection

All the finishes are available on the complete range of mooring lines.

Types of splicing and protections

Stainless-steel thimble without protection

Loop without protection

Loop with leather protection

NEW

Spliced loop with Cordura® fabric heavy protection

Colours

Available standard colours of the ropes

White | Black | Blu Navy

Available special colours of the ropes

Silver Grey | Hemp | Red

Bordeaux | English green

Available leather protections

Natural | Brown | Black

Cordura® heavy fabric

Black

Fender Covers

To protect the sides of the boat, a large range of fender covers is available in addition to the mooring lines. Make your choice between many different sizes and colours and give your boat a touch of class and personality with customized covers showing the embroidered name and/or logo of the boat.

Mooring line

Floating ropes

MOORING - BREAKING LOAD AND WEIGHT COMPARATIVE TABLE

Ø	FLOATING SECUR LINE		FLOATING NEW NOVUS LINE		FLOATING SQUARE LINE PP	
	N037		NA17C63		NA43	
DIAM	B. L.	WEIGHT	B. L.	WEIGHT	B. L.	WEIGHT
[mm]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]
3	-	-	-	-	-	-
4	-	-	-	-	-	-
5	-	-	-	-	-	-
6	-	-	-	-	-	-
7	-	-	-	-	-	-
8	-	-	-	-	-	-
9	-	-	-	-	-	-
10	10.000	63,00	-	-	-	-
11	-	-	-	-	-	-
12	12.500	82,00	-	-	1.560	56,00
14	15.000	100,00	6.000	105,00	2.000	78,00
16	18.000	130,00	7.000	120,00	2.500	92,00
18	20.600	180,00	9.000	135,00	3.200	115,00
20	23.000	220,00	10.500	182,00	4.000	160,00
22	-	-	12.700	244,00	5.000	178,00
24	28.000	300,00	14.500	290,00	5.500	214,00
26	-	-	15.800	330,00	-	-
28	34.000	340,00	17.000	350,00	7.000	280,00
30	-	-	19.400	370,00	-	-
32	39.000	400,00	20.800	390,00	9.500	365,00
34	-	-	-	-	-	-
36	45.000	500,00	22.000	505,00	13.000	471,00
38	-	-	-	-	-	-
40	50.000	560,00	25.300	568,00	17.000	525,00
44	55.000	626,00	-	-	19.000	585,00
48	60.000	680,00	-	-	22.500	645,00
52	-	-	-	-	24.000	705,00

NOTE ABOUT BREAKING LOAD AND DIAMETERS The average values shown above are derived from tests taken at Armare laboratory, on properly spliced new ropes, and may change without notice. Other diameters available on request. The static load of the rope must not exceed 20% of breaking load shown in the table. Knots may affect the breaking load of the rope with reductions of up to 60%. The splicing increases the diameter of the rope of about 1.5 times. The use and exposure to weather conditions, depending from the kind of rope and the time of exposure, can reduce the breaking loads of the ropes.

Secur Line

PRODUCT CODE N037

100% SK78 · PU COATED TREATMENT · FLOATING DYNEEMA

CONSTRUCTION
Balanced twist 8 strand braid made with 100% Dyneema® SK78 and PU Coating.

FEATURES AND USE
Floating rope, ideal for emergency anchoring and long mooring from boat to land and as towing line. Made of 100% Dyneema® SK78 it assures high breaking load, lightness, low elongation, almost zero water absorption, high visibility and high resistance to abrasion and cut.

STANDARD DIAMETERS
From 10 to 48 mm

STANDARD COLOURS

Grey · Hemp · Yellow

Novus Line

NEW

PRODUCT CODE NA17C63

100% SK78 · PU COATED TREATMENT · FLOATING

CONSTRUCTION
Double Braid - 100% Dyneema® SK78 core, 100% H.T. Polypropylene cover.

FEATURES AND USE
The latest new rope concept for floatable moorings and towing lines. Novus Line is a new generation rope made with a Dyneema® SK78 braiding core, which assures the 100% of the load and protected and covered by a 12 strands braid in H.T. Polypropylene with UV treatment. The result is an incredible floating rope extremely flexible and easily maneuverable, with high breaking strength, light weight, low water absorption. It assures a good protection from accidental cutting and is spliceable with a right technique.

STANDARD DIAMETERS
From 14 to 40 mm

STANDARD COLOURS



White · Black · Yellow · Light Blue · Orange

Square Line PP

PRODUCT CODE NA43

FLOATING PP MULTIFILAMENT

CONSTRUCTION
8 strand braid in H.T. Polypropylene with UV treatment.

FEATURES AND USE
Multi-use floating line, for long moorings and towing.

STANDARD DIAMETERS
From 12 to 52 mm

STANDARD COLOURS

White · Black · Yellow · Light Blue · Orange

Mooring line

Conventional ropes

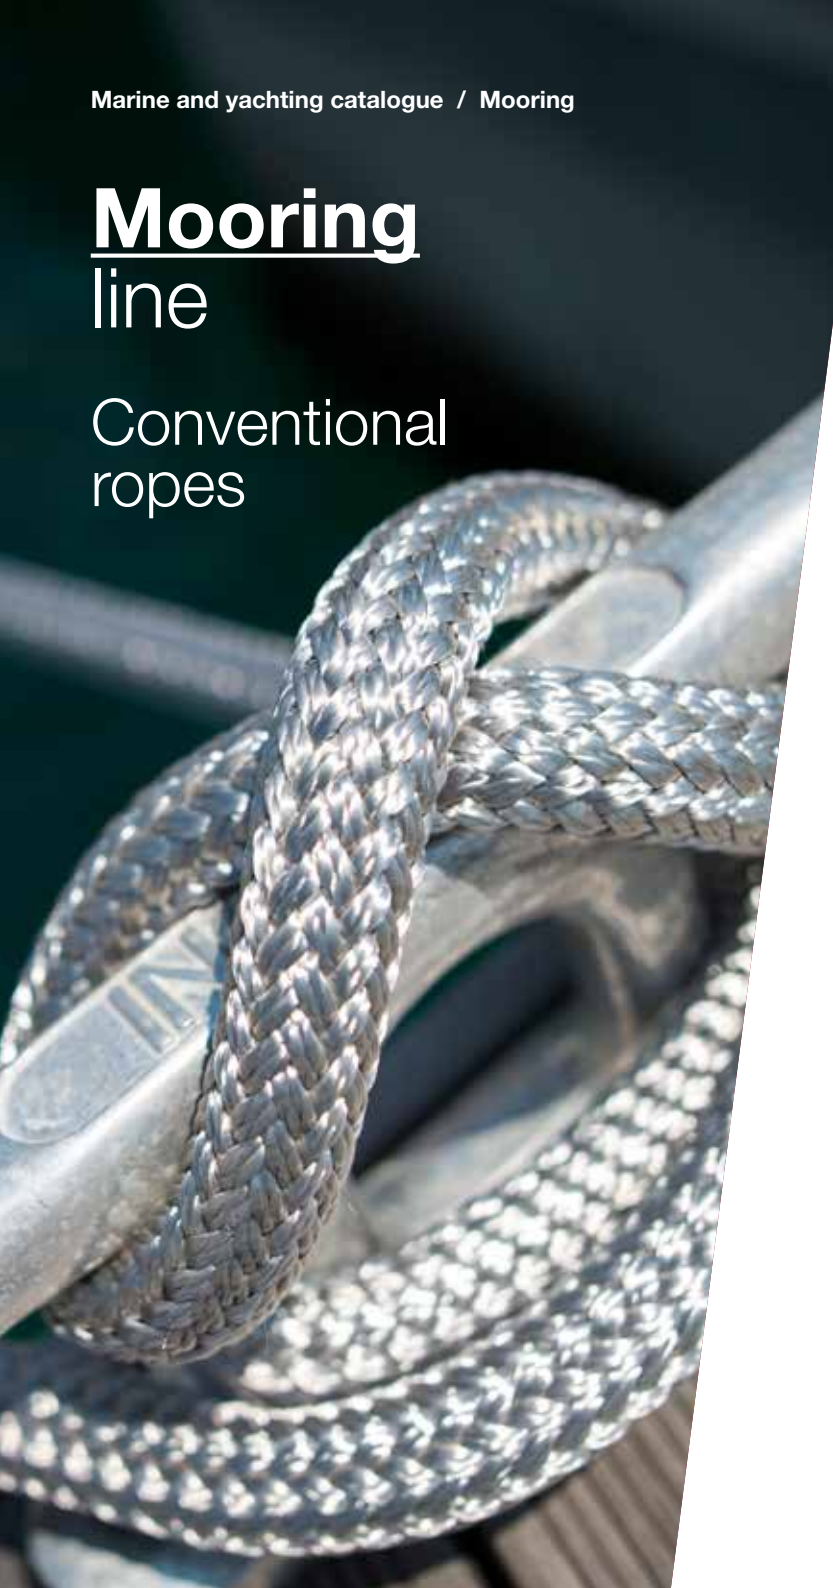

MOORING - BREAKING LOAD AND WEIGHT COMPARATIVE TABLE

Ø	STORM LINE PLUS		STORM LINE		ROUND LINE		SQUARE LINE		SEA KING	
	NA90_SLP		N020		NA40		NA41		NA42	
DIAM	B. L.	WEIGHT	B. L.	WEIGHT	B. L.	WEIGHT	B. L.	WEIGHT	B. L.	WEIGHT
[mm]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]
3	**-**	-	**-**	-	**-**	-	**-**	-	**300**	9,00
4	**-**	-	**-**	-	**-**	-	**-**	-	**470**	16,00
5	**-**	-	**-**	-	**-**	-	**-**	-	**600**	22,00
6	**-**	-	**-**	-	**-**	-	**-**	-	**700**	28,00
7	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-
8	**-**	-	**2.000**	46,00	**-**	-	**-**	-	**1.270**	48,00
9	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-
10	**-**	-	**2.650**	68,00	**-**	-	**1.600**	71,00	**1.680**	70,00
11	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-
12	**-**	-	**3.500**	97,00	**-**	-	**2.100**	92,00	**2.800**	103,00
14	**-**	-	**4.200**	134,00	**-**	-	**2.900**	128,00	**3.600**	140,00
16	**11.500**	163,00	**4.900**	144,00	**4.160**	170,00	**3.500**	152,00	**4.300**	185,00
18	**-**	-	**5.400**	188,00	**5.018**	195,00	**4.100**	170,00	**5.400**	230,00
20	**18.200**	239,00	**8.500**	288,00	**5.460**	240,00	**4.500**	225,00	**6.700**	290,00
22	**24.400**	305,00	**11.600**	365,00	**6.045**	305,00	**5.000**	255,00	**8.300**	320,00
24	**30.000**	366,00	**13.500**	441,00	**6.890**	350,00	**5.700**	290,00	**9.700**	437,00
26	**37.000**	425,00	**14.600**	510,00	**8.099**	421,00	**6.500**	360,00	**11.100**	500,00
28	**45.000**	477,00	**18.500**	575,00	**10.465**	550,00	**8.400**	380,00	**12.050**	565,00
30	**52.000**	608,00	**20.000**	640,00	**11.648**	630,00	**9.650**	470,00	**13.400**	650,00
32	**61.000**	740,00	**23.600**	890,00	**12.350**	710,00	**10.870**	560,00	**15.400**	740,00
34	**70.000**	838,00	**-**	-	**-**	-	**-**	-	**-**	-
36	**79.000**	937,00	**25.500**	1.130,00	**15.600**	850,00	**13.700**	640,00	**19.000**	900,00
38	**88.000**	999,00	**-**	-	**-**	-	**-**	-	**-**	-
40	**99.500**	1.062,00	**31.000**	1.280,00	**17.500**	1.160,00	**15.580**	830,00	**23.500**	1.150,00
44	**-**	-	**36.000**	1.470,00	**20.000**	1.450,00	**19.400**	1.050,00	**-**	-
48	**-**	-	**40.800**	1.760,00	**-**	-	**23.300**	1.200,00	**-**	-
52	**-**	-	**49.900**	2.050,00	**-**	-	**28.100**	1.320,00	**-**	-

NOTE ABOUT BREAKING LOAD AND DIAMETERS The average values shown above are derived from tests taken at Armare laboratory, on properly spliced new ropes, and may change without notice. Other diameters available on request. The static load of the rope must not exceed 20% of breaking load shown in the table. Knots may affect the breaking load of the rope with reductions of up to 60%. The splicing increases the diameter of the rope of about 1.5 times. The use and exposure to weather conditions, depending from the kind of rope and the time of exposure, can reduce the breaking loads of the ropes.

Storm Line Plus

PRODUCT CODE NA90_SLP

100% SK78

CONSTRUCTION
Balanced twist Dyneema® braided core, Polyester cover.

FEATURES AND USE
It brings a significant improvement to the lives of the crew, ensuring very high breaking load and small diameters, extreme safety and low water absorption. Furthermore, thanks to the core in Dyneema®, the weight is halved if compared to ropes with equal load in Polyester/Nylon. The choice of Storm Line Plus for the mooring of your boat provides an economic benefit over time, thanks to the extraordinary durability.

STANDARD DIAMETERS
From 16 to 40 mm

STANDARD COLOURS

Storm Line

PRODUCT CODE N020

CONSTRUCTION
Balanced twisted Polyester braided core, Polyester cover.

FEATURES AND USE
Ideal for Super Yachts but also for emergency or long moorings of small and medium sized boats.

STANDARD DIAMETERS
From 8 to 52 mm

STANDARD COLOURS

SPECIAL COLOURS

Round Line

PRODUCT CODE NA40

CONSTRUCTION
12 strand braid in Polyester.

FEATURES AND USE
For the mooring of small boats to Super Yachts. Always smooth, even after prolonged use. Easy to splice.

STANDARD DIAMETERS
From 16 to 44 mm

STANDARD COLOURS

SPECIAL COLOURS

Square Line

PRODUCT CODE NA41

CONSTRUCTION
8 strand braid in Polyester.

FEATURES AND USE
Commonly used for the mooring of all types of boats up to Super Yachts, anchoring as well as temporary and long moorings of medium and small boats.

STANDARD DIAMETERS
From 10 to 52 mm

STANDARD COLOURS

SPECIAL COLOURS

Sea King

PRODUCT CODE NA42

CONSTRUCTION
3 strand rope with balanced torsion, double twist construction in Polyester.

FEATURES AND USE
This is the best choice for permanent moorings, for mooring on mooring posts and for all types of boats.

STANDARD DIAMETERS
From 3 to 40 mm

STANDARD COLOURS

SPECIAL COLOURS

One Design line

ARMARE ONE DESIGN IS A LINE OF INNOVATIVE PRODUCTS, DESIGNED AND TESTED BY HIGH LEVEL ATHLETES AND OLYMPIC TEAMS, TO SATISFY ALL THE NEEDS OF THE MOST DEMANDING CLASSES.

THIS LINE OFFERS PRODUCTS IN ROLLS, WHICH CAN BE USED FOR VARIOUS MANEUVERS ON ONE DESIGN CLASSES, AS WELL AS INDIVIDUAL ROPES AND ARTICLES WHICH ARE SETTLED AND CALIBRATED FOR THE SPECIFIC USE ON BOARD. ALL PRODUCTS ARE CONSTANTLY DEVELOPED IN COOPERATION WITH TOP-LEVEL ATHLETES AND OUR TECHNICAL DEPARTMENT. FOR SOME CLASSES ARMARE PROVIDES COMPLETE FULL KITS THAT COVER THE WHOLE RIG ONBOARD.

Our champions

Carlo De Paoli / Open Moth Italian Champion
Ph © Renato Tebaldi

Marco Gradoni / Optimist World Champion 2017, 2018 and 2019
Ph © Matias Capizzano

Tullio Picciolini - Giammarco Sardi / 6m Ocean Cat
Ph © Andrea Falcon

Antonio Squizzato / 2.4 Mr
Ph © Fabio Taccola

Benedetta Di Salle - Alessandra Dubbini / 470F
Ph © Sailing Energy

Leopoldo Sirolli / O'Pen Bic / Bronzo Mondiale

Enfant Terrible Sailing Team / J70 2018 European Championship

Gianluigi Ugolini - Maria Giubilei / European Champions U23
Ph © Martina Orsini

Porro - Leoni / 29er World, European and Italian Champions
Ph © Elena Giolai

GAMBERUS 2.0 / GAMBERUS 2.0 PLUS

the best sheet for your Optimist

Two new sheets, one construction

Before being launched on the market, the new sheet Gamberus 2.0 was tested by many different international teams, winners of the World Championship, the European Championship as well as several Italian races.

Thanks to its awesome smoothness and ease of movement, the innovative construction turns Gamberus 2.0 into the best sheet for Optimist.

Gamberus 2.0 / Gamberus 2.0 PLUS

Two versions make the choice even more complete and guarantee the best performance to each type of athlete. Both the sheets differ in terms of elasticity and resistance to abrasion.
In fact, Gamberus 2.0 Plus is constructed with an insert of Black Technora® fiber that guarantees an ideal performance to each sailor, even the most sensitive and technical.

Gamberus 2.0 - Tapered Main Sheet

N73_OPTI_2.0_MAINSHEET
COLOUR Orange Fluo / Yellow

Gamberus 2.0 Plus - Tapered Main Sheet

N73_OPTI_2.0P_MAINSHEET
COLOUR Black / Blue

Armare Official Supplier

Armare Ropes, official supplier to FIV (Italian Sailing Federation) and supporter of the Italian Olympic Team as well as of the AICO National Competitive Team.

FIV

OPTIMIST ITALIA
Associazione Italiana Classe Optimist

> UNIQUE GRIP
> OTPIMIZED DIAMETER
> ABSOLUTE LIGHTNESS

OPTIMIST LINE

Downhaul

PRODUCT CODE N73_OPTI_DOWNHAUL

CONSTRUCTION
Black Dyneema® + Cordura® + Dyneema® SK99 + HPS + PU

FEATURES AND USE
Spliced Downhaul, cut and finished at the exact length, ready to be used.

Outhaul

PRODUCT CODE N73_OPTI_OUTHAUL

CONSTRUCTION
Black Dyneema® + Cordura®

FEATURES AND USE Spliced Outhaul, cut and finished at the exact length, ready to be used.

Complete Halyard System

PRODUCT CODE N73_OPTI_HALYARD

CONSTRUCTION
Protection cover in Black Technora® + Dyneema® + Polyester

FEATURES AND USE
Complete Halyard system composed by spliced ropes, cut at the exact length and finished with an Armare Lash Bobbin, ready to be used.

Single Friction Block

PRODUCT CODE N73_OPTI_SFB

CONSTRUCTION
Dyneema® SK99 + HPS + PU

FEATURES AND USE
Single friction block made with a spliced rope and finished with an Armare Lash Bobbin.
Ideal for slight wind conditions.

Double Friction Block

PRODUCT CODE N73_OPTI_DFB

CONSTRUCTION
Dyneema® SK99 + HPS + PU

FEATURES AND USE
Double friction block made with a spliced rope and finished with two Armare Lash Bobbins.
Ideal for severe wind conditions.

Strops

PRODUCT CODE NA93C24_20
NA93C24_50

CONSTRUCTION Braid with core

COVER Cordura® + Polyester

CORE Dyneema® SK78

FEATURES AND USE
Strops for Optimist sail.
Roll length: **20 meters and 50 meters.**

STANDARD DIAMETERS
1,4 mm and 2,5 mm

STANDARD COLOURS
Melange White / Silver Grey
Melange White / Azure

Kit Optimist Strops

PRODUCT CODE N73_OPTI_KITSTROPPI

It is composed by:
- n°12 strops 1,4 mm thermocut length 50 cm.
- n°5 strops 2,5 mm thermocut length 60 cm.

CONSTRUCTION
Braid with core in Dyneema® SK78

COVER Cordura® + Polyester

FEATURES AND USE
Strops for Optimist sail.

STANDARD DIAMETERS
1,4 mm and 2,5 mm

STANDARD COLOURS
Melange White / Silver Grey
Melange White / Azure

OPTIMIST LINE

Gamberus Mainsheet

PRODUCT CODE NA71100MEC88

CONSTRUCTION Single Braid in Dyneema® + Polyester

FEATURES AND USE
Light and comfortable handgrip, low water absorption, easy to taper. Ideal to be used as sheet for Optimist. It is sold by roll.

STANDARD DIAMETER
10 mm

STANDARD COLOUR
Melange Black / Azure

Optimist Halyard

PRODUCT CODE NA00C85_OD

CONSTRUCTION Protection cover in Black Technora® + Dyneema® + Polyester

FEATURES AND USE
Used as halyard for Optimist.

STANDARD DIAMETER
6 mm

STANDARD COLOURS
Melange Black / White / Orange Fluo

Duck Line

PRODUCT CODE NA63C63

CONSTRUCTION Double Braid Polypropylene with UV treatment

FEATURES AND USE
Floating rope ideal for the towing of Dinghies.

STANDARD DIAMETER
5 mm

STANDARD COLOURS
Yellow / Red

Gamberus Full Kit Optimist NEW

PRODUCT CODE N73_OPTI_EVO_FK

A complete kit including very performing ropes to equip your optimist. They are furnished ready-to-use at the required length and where necessary, spliced and finished.

CODE	PRODUCTS
N73_OPTI_2.0_MAINSHEET	GAMBERUS 2.0 - TAPERED MAIN SHEET
N73_OPTI_DOWNHAUL	DOWNHAUL
N73_OPTI_OUTHAUL	OUTHAUL
N73_OPTI_HALYARD	COMPLETE HALYARD SYSTEM
N73_OPTI_SFB	SINGLE FRICTION BLOCK
NA93014MEC24_20	ROLL OFF STROPS mm 1,4 - 20 meters
NA93025MEC24_20	ROLL OFF STROPS mm 2,5 - 20 meters

One Design products

Sold by roll of 100/200 m

Ø [mm]	CODE	PRODUCT	APPLICATION	420	470	2.4 rm	29er	49er	49er FX	BYTE	LASER 4.7	LASER Radial	SONAR	DINGHY 12'	SKUD 18	NACRA 17	FINN	MOTH	OTHER DINGHIES
6,8	NA63070MEC86	ZUMBA	Laser & Byte Mainsheet	□	□	□	□	□	□	■	■	■	□	□	□	□	□	□	□
5	NA26050MEC86	KUMBA 5	Spi sheet & Gennaker sheet	■	■	□	□	■	■	□	□	□	□	□	■	■	■	□	□
6	NA26060MEC86	KUMBA 6	Spi sheet & Gennaker sheet	■	■	□	□	■	■	□	□	□	□	□	■	■	■	□	□
7	NA26070MEC86	KUMBA 7	Mainsheet & Jib sheet	■	■	■	■	■	■	■	□	□	■	■	■	■	■	■	□
3,5	NA58035MTC86	HAND LINE	Cunningam & Vang Skiff circuit	□	□	□	■	■	□	□	□	□	□	□	□	■	■	■	□
4	NA58040MTC86	HAND LINE	Cunningam & Vang Skiff circuit	□	□	□	■	■	□	□	□	□	□	□	□	■	■	■	□
3	NA63030SOC17_S	LORENZ LINE NEW	Running Rigging	□	□	□	□	■	■	□	□	□	□	□	□	□	□	■	□
4	NA63040SOC17_S	LORENZ LINE NEW	Running Rigging	□	□	□	□	■	■	□	□	□	□	□	□	□	□	■	□
5	NA63050SOC17_S	LORENZ LINE NEW	Running Rigging	□	□	□	□	■	■	□	□	□	□	□	□	□	□	■	□
6	NA63060SOC17_S	LORENZ LINE NEW	Running Rigging	□	□	□	□	■	■	□	□	□	□	□	□	□	□	■	□
5	NA63050MEC63	DUCK LINE	Floating towing line	■	■	■	■	■	■	■	■	■	■	■	■	■	■	□	□
8	NA63080MEC63	DUCK LINE	Floating towing line	■	■	■	■	■	■	■	■	■	■	■	■	■	■	□	□
4,8	NA77050SNC71	STOP 1	Main - Jib - Spi - Gk Halyard	■	■	■	■	■	■	□	□	□	■	□	■	□	□	□	□
4,6	NA77050SNC69	STOP 2	Main - Jib - Spi - Gk Halyard	■	■	■	■	■	■	□	□	□	■	□	■	□	□	□	□
4,8	NA59050SNC24	STOP 3	Main - Jib - Spi - Gk Halyard	□	■	□	■	□	■	□	□	□	□	□	□	□	□	□	□
4,6	NA59045SNC51	STOP 4	Main - Jib - Spi - Gk Halyard	■	■	■	■	■	■	□	□	□	■	□	■	□	□	□	□
3	NA77030SNC24	STOP 5	470 Spi- Halyard	□	■	□	□	□	□	□	□	□	□	□	□	□	□	□	□
3	NA59030SNC24	STOP 6	470 Spi - Halyard & Running Line	□	■	□	□	□	□	□	□	□	□	□	□	□	□	□	□
2,8	NA54028MTC00	RUN LINE	Running Rigging	■	■	■	■	■	■	■	■	■	■	■	■	■	■	□	□
3,8	NA54038MTC00	RUN LINE	Running Rigging	■	■	■	■	■	■	■	■	■	■	■	■	■	■	□	□
5,5	NA54055MTC00	RUN LINE	Running Rigging	■	■	■	■	■	■	■	■	■	■	■	■	■	■	□	□
5,5	NA73055MEC00	RUN COLOR NEW	Running Rigging	■	■	■	■	■	■	■	■	■	■	■	■	■	■	□	□
6	NA34060MEC00	COLIBRÌ NEW	Sheet ideal for dinghies	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	■
8	NA34080MEC00	COLIBRÌ NEW	Sheet ideal for dinghies	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	■

Zumba

PRODUCT CODE NA63C86

CONSTRUCTION Double braid with special light core

COVER Black Technora® + Polyester

FEATURES AND USE
Ideal as main sheet for Laser and Byte. Light and comfortable hand grip, low water absorption. It is sold by roll and also as finished sheet.

STANDARD DIAMETER
6,8 mm

STANDARD COLOURS
Melange Black / Red

Kumba 5 - 6 - 7

PRODUCT CODE NA26C86

CONSTRUCTION Double braid

COVER Black Technora® + Polyester

CORE Dyneema® SK78 + PU

FEATURES AND USE
Suggested as mainsheet and jibsheet.

STANDARD DIAMETERS
K5 5 mm
K6 6 mm
K7 7 mm

STANDARD COLOURS
K5 Melange Black / Azure
K6 Melange Black / Yellow
K7 Melange Black / Orange Fluo
or Melange Black / Green Fluo

Hand Line

PRODUCT CODE NA58C86

CONSTRUCTION Double braid

COVER Black Technora® + Polyester

CORE Dyneema® SK78 + PU

FEATURES AND USE
Good handling.
Ideal for running rigging,
and cunningham and vang circuit line.

STANDARD DIAMETER
3,5 and 4 mm

STANDARD COLOURS
Melange Black / Red
Melange Black / Azure
Melange Black / Yellow

Lorenz Line

PRODUCT CODE NA63C17_S

CONSTRUCTION Braid 100% Dyneema® SK78 with Shield treatment and unidirectional core

FEATURES AND USE
Excellent resistance to abrasion and bending, low elongation, good handling.
Ideal for running rigging.

STANDARD DIAMETERS
3, 4, 5, 6 mm

STANDARD COLOURS
Silver Grey

Duck Line

PRODUCT CODE NA63C63

CONSTRUCTION Double braid in Polypropylene HT with UV treatment

FEATURES AND USE
Floating rope ideal for the towing of Dinghies.

STANDARD DIAMETERS
5 and 8 mm

STANDARD COLOURS
Yellow / Red

DynElastic

PRODUCT CODE T07_DYN

CONSTRUCTION Elastic braid with a special braided cover in Dyneema®

FEATURES AND USE
The Dyneema® cover makes this braid very resistant both to abrasion and to repeated micro-movements on the same point and thanks to its features it limits the over-elongation of the braid itself. Excellent UV resistance. It has been developed thinking about the intense use on catamarans, skiffs and other new concept boats.

STANDARD DIAMETER
From 2 to 8 mm in rolls of 100 m

STANDARD COLOURS
White - Pure Black / Yellow

Ø	WEIGHT	ROLL LENGTH
[mm]	[g /m]	[m]
2	1,32	100
3	6,10	100
4	12,9	100
5	16,8	100
6	26,2	100
7	36,7	100
8	48,0	100

Stop 1

PRODUCT CODE NA77C71

CONSTRUCTION Double Braid

COVER Polyester

CORE Dyneema® SK78 + HPS + PU

FEATURES AND USE
It is used as main sheet, jib sheet, spinnaker and gennaker by sailing schools. Easy to taper.

STANDARD DIAMETER 4,8 mm

STANDARD COLOURS
Snake Black / Green
Snake Black / Orange

Stop 2

PRODUCT CODE NA77C69

CONSTRUCTION Double Braid

COVER Kevlar® + Polyester

CORE Dyneema® SK78 + HPS + PU

FEATURES AND USE
The best solution for the sliding of the halyard on the cleat of the sail under load. It is suggested as main halyard, jib, spinnaker and gennaker for the first approach to the race. Easy to taper.

STANDARD DIAMETER 4,6 mm

STANDARD COLOURS
Melange Kevlar® / Green
Melange Kevlar® / Orange Fluo

Stop 3

PRODUCT CODE NA59C24

CONSTRUCTION Double Braid

COVER Cordura® + Polyester

CORE Dyneema® SK99 + HPS + PU

FEATURES AND USE
Great locking on the cleat, with high breaking load and low elongation. Recommended as main halyard, jib, spinnaker and gennaker for sailors. Easy to taper.

STANDARD DIAMETER 4,8 mm

STANDARD COLOURS
Melange White / Green
Melange White / Orange Fluo

Stop 4

PRODUCT CODE NA59C51

CONSTRUCTION Double Braid

COVER Black Technora® + Cordura® + Polyester

CORE Dyneema® SK99 + HPS + PU

FEATURES AND USE
Excellent grip and abrasion resistance, low elongation and high braking load. Recommended as main halyard, jib, spinnaker and gennaker for professionals sailors. Easy to taper.

STANDARD DIAMETER 4,6 mm

STANDARD COLOURS
Melange Black / White / Yellow
Melange Black / White / Orange Fluo
Melange Black / White / Azure

Stop 5

PRODUCT CODE NA77C24

CONSTRUCTION Double Braid

COVER Cordura® + Polyester

CORE Dyneema® SK99 + HPS + PU

FEATURES AND USE
Ideal to be used as spinnaker sheet for 470. Easy to taper.

STANDARD DIAMETER 3 mm

STANDARD COLOURS
Melange White / Black

Stop 6

PRODUCT CODE NA59C51

CONSTRUCTION Double Braid

COVER Black Technora® + Cordura® + Polyester

CORE Dyneema® SK99 + HPS + PU

FEATURES AND USE
Optimal sheet and running line. High grip on the cleat, reduced elongation and excellent resistance to abrasion. Easy to taper.

STANDARD DIAMETER 3 mm

STANDARD COLOURS
Melange Black / White / Azure

Run Line

PRODUCT CODE NA54C00

CONSTRUCTION
12 plait with Black Dyneema® + Cordura®

FEATURES AND USE
Used for general running rigging.

STANDARD DIAMETERS
2,8, - 3,8 - 5,5 mm

STANDARD COLOURS
Melange Black / White

Run Color

PRODUCT CODE NA73C00

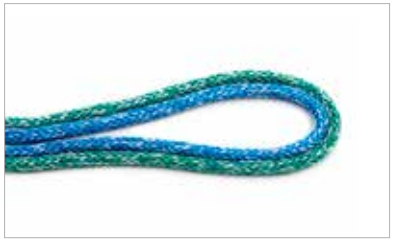

CONSTRUCTION
12 plait with Cordura® + HMPE

FEATURES AND USE
Used for general running rigging.

STANDARD DIAMETERS
5,5 mm

STANDARD COLOURS
Melange White / Green
Melange White / Azure

Colibrì

PRODUCT CODE NA34C00

CONSTRUCTION Single braid with Polypropylene + Cordura® + Polyester

FEATURES AND USE
Light and flexible. Sheet ideal for Dinghies.

STANDARD DIAMETERS
6 and 8 mm

STANDARD COLOURS
Melange White / Red
Melange White / Yellow
Melange White / Azure

Flat Braid

NEW

PRODUCT CODE T08

CONSTRUCTION Flat braid with Polyester HT

FEATURES AND USE
For bindings and reference notches.

DIMENSIONS
3.0 x 0.3 mm

ROLL
Of 15 meters

STANDARD COLOURS
White

Soft Braid
One Design

EIGHT DIFFERENT TYPES OF ROPES DESIGNED TO MAINTAIN AN OPTIMAL GRIP IN THE HAND. LIGHT AND FLEXIBLE, SOFT BRAIDS DO NOT CREATE KINKS AND DO NOT ABSORB WATER. THEY ARE IDEAL FOR USE ON MONOTYPES AND FOR MAKING CLOSED-CIRCUIT FURLING LINES.

Soft Braid advantages

Grip Treatment

This treatment is applied on the cover yarn and gives excellent feeling in the hand and excellent grip on the stopper, making the cover ideal for use on One Design monotypes.

Supercompact Core

It makes it easy to remove the cover and lightens the finished line, maintaining an incomparable compactness of the braid ensuring high resistance to abrasion, good breaking load and low elongation.

Super Shape

The Soft Braid 5-6-7-8 ropes are made with the exclusive Super Shape construction, which prevents deformation resulting from repeated passages on the ratchet blocks. The rope works better on the pulley groove, maintaining perfect roundness and avoiding slippage due to the “triangularization” of the sheet.

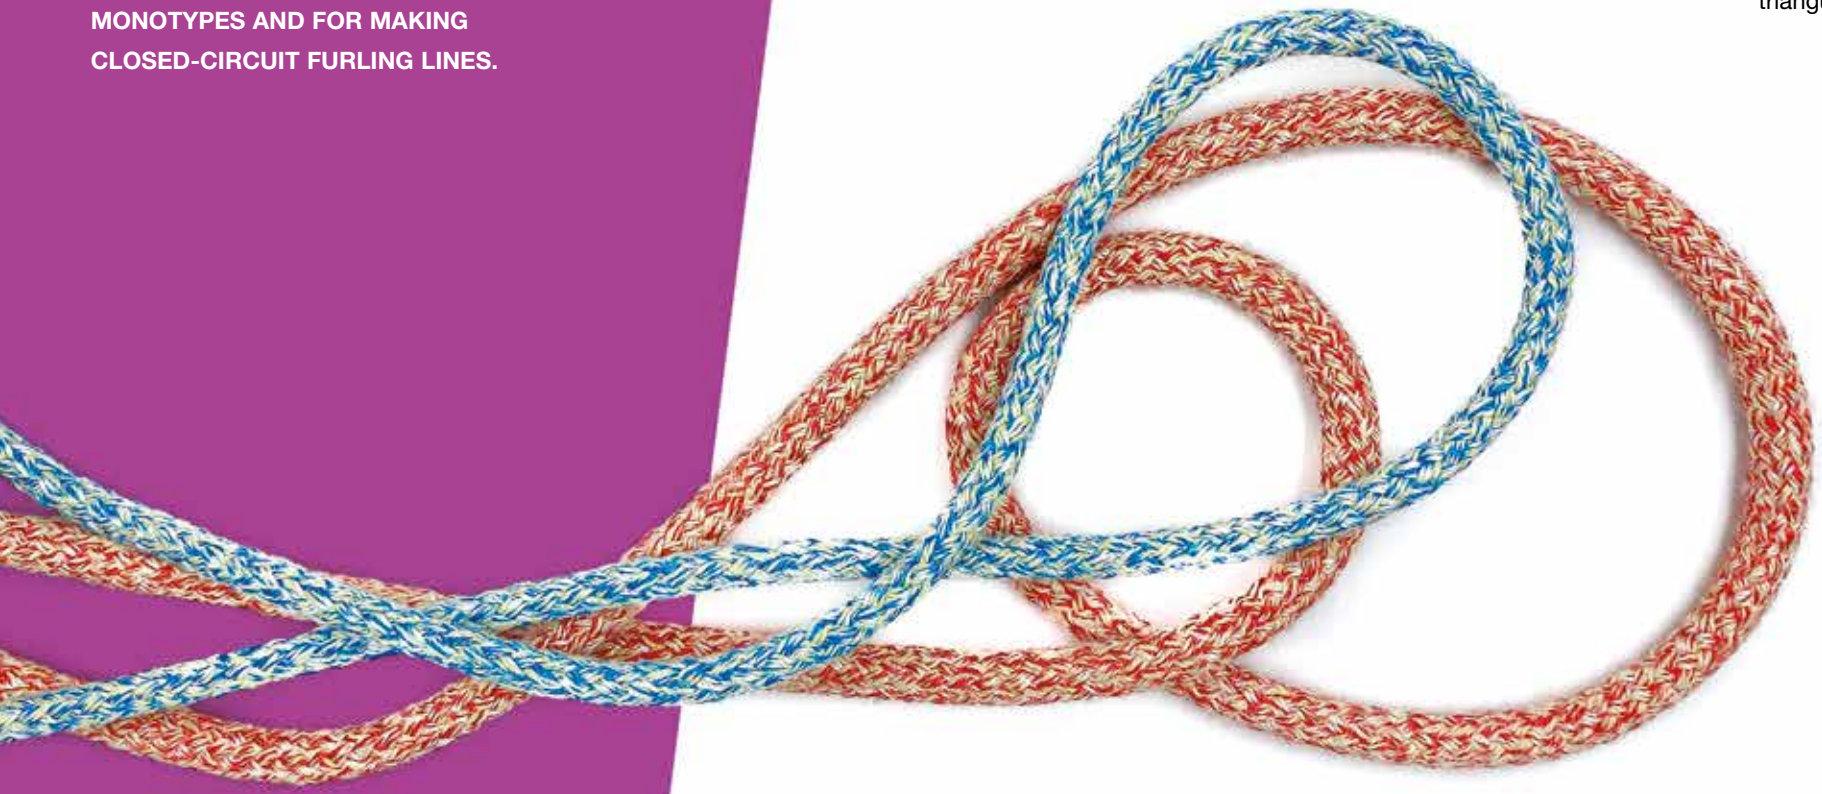

SOFT BRAID - BREAKING LOAD AND WEIGHT COMPARATIVE TABLE

Ø	SOFT BRAID 1		SOFT BRAID 2		NEW SOFT BRAID 3		NEW SOFT BRAID 4	
DIAM	B. L.	WEIGHT	B. L.	WEIGHT	B. L.	WEIGHT	B. L.	WEIGHT
[mm]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]
4	**280**	15,00	**280**	14,60	**430**	14,90	**430**	14,50
5	**420**	25,00	**420**	24,30	**690**	24,50	**690**	23,80
6	**760**	29,00	**760**	28,10	**1.000**	28,80	**1.000**	27,90
7	**1.100**	37,00	**1.100**	35,90	**1.450**	36,60	**1.450**	35,50
8	**1.550**	48,00	**1.550**	46,60	**2.100**	48,80	**2.100**	47,30
9	**2.100**	61,00	**2.100**	59,20	**3.000**	60,60	**3.000**	58,80
10	**2.450**	73,00	**2.450**	70,80	**4.000**	72,50	**4.000**	70,30
11	**3.300**	86,50	**3.300**	83,90	**5.000**	85,70	**5.000**	83,10

SUPER SHAPE NEW

Ø	SOFT BRAID 5		SOFT BRAID 6		SOFT BRAID 7		SOFT BRAID 8	
DIAM	B. L.	WEIGHT	B. L.	WEIGHT	B. L.	WEIGHT	B. L.	WEIGHT
[mm]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]
4	**-**	-	**-**	-	**-**	-	**-**	-
5	**-**	-	**-**	-	**-**	-	**-**	-
6	**800**	30,20	**800**	31,10	**800**	30,80	**800**	30,80
7	**1.100**	38,40	**1.100**	39,60	**1.100**	39,20	**1.100**	39,20
8	**1.530**	51,20	**1.530**	52,80	**1.530**	52,20	**1.530**	52,20
9	**2.300**	63,60	**2.300**	65,50	**2.300**	64,90	**2.300**	64,90
10	**3.230**	76,10	**3.230**	78,40	**3.230**	77,60	**3.230**	77,60
11	**4.400**	90,00	**4.400**	92,70	**4.400**	91,80	**4.400**	91,80

NOTE ABOUT BREAKING LOAD AND DIAMETERS
The average values shown above are derived from tests taken at Armare laboratory, on properly spliced new ropes, and may change without notice. Other diameters available on request. The static load of the rope must not exceed 20% of breaking load shown in the table. Knots may affect the breaking load of the rope with reductions of up to 60%. The splicing increases the diameter of the rope of about 1.5 times. The use and exposure to weather conditions, depending from the kind of rope and the time of exposure, can reduce the breaking loads of the ropes.

Soft Braid 1 - 2

Dinghies and small boats

Soft Braid 1 and 2 are manufactured with a polypropylene core and differ in the cover, in Polyester or Dyneema® / Polyester respectively. Both ropes have the special “Grip” treatment which makes them excellent for bare hand use. These features make them the perfect choice for general use aboard dinghies and small boats where extreme performance is not required.

Soft Braid 1

PET + GRIP

PRODUCT CODE NA63C81

CONSTRUCTION Double braid
COVER Polyester + Grip
CORE Polypropylene Braid

FEATURES AND USE Good quality cover, light core with low breaking load and medium elongation. Suitable for applications that do not need particular performance and require to use the rope both by bare hand and on stoppers (for example control lines of dinghies and small boats). Being easily spliceable it can also be used as closed circuits on manual furlers.

STANDARD DIAMETERS From 4 to 11 mm
STRETCH AT 30% B. L. 8,00%
STRETCH AT B. L. 15,00%

COLOURS

Soft Braid 2

PET + GRIP / DYN

PRODUCT CODE NA63C82

CONSTRUCTION Double braid
COVER Dyneema® / Polyester + Grip
CORE Polypropylene Braid

FEATURES AND USE The introduction of Dyneema® combined with Polyester results in a sliding cover that is more resistant to abrasion, but always with a light weight polypropylene core with low breaking load and average elongation. Aimed at general use, but with frequent runnings, it is a cheaper alternative as a sheet for dinghies and small boats.

STANDARD DIAMETERS From 4 to 11 mm
STRETCH AT 30% B. L. 8,00%
STRETCH AT B. L. 15,00%

COLOURS

Soft Braid
One Design

Soft Braid 3 - 4
Dinghies and monotypes

Soft Braid 3 and 4 are two performance ropes, both with core in Dyneema® SK78 + PU and cover in Dyneema / Polyester, and Dyneema® / Polyester / Kevlar® respectively. Both ropes are resistant to abrasion and have an excellent behavior during fast surges, a feature that makes them the perfect choice for competitive use such as sheets and control lines on dinghies and monotypes.

Soft Braid 3

NEW

PET + GRIP / DYN

PRODUCT CODE NA57C82

100% SK78 · PU COATED TREATMENT

CONSTRUCTION Double braid
COVER PET + Grip / Dyneema®
CORE 12 strand braid made with Dyneema® SK78, impregnated with PU coating

FEATURES AND USE Sliding and abrasion resistant cover, good breaking load and low elongation core. Destined to sheets and control lines with frequent running.

STANDARD DIAMETERS From 4 to 11 mm
STRETCH AT 30% B. L. 3,10%
STRETCH AT B. L. 3,70%

COLOURS

Soft Braid 4

NEW

PET + GRIP / DYN / KEV

PRODUCT CODE NA57C83

100% SK78 · PU COATED TREATMENT

CONSTRUCTION Double braid
COVER PET + Grip / Dyneema® / Kevlar®
CORE 12 strand braid, made with Dyneema® SK78, impregnated with PU coating

FEATURES AND USE Sliding cover with excellent resistance to quick surge; optimal duration against abrasions, thanks to the Kevlar® fiber. Low elongation core with good breaking load. Destined to sheets with frequent and fast running.

STANDARD DIAMETERS From 4 to 11 mm
STRETCH AT 30% B. L. 3,10%
STRETCH AT B. L. 3,70%

COLOURS

SUPER SHAPE

Soft Braid 5 - 6 - 7- 8

Extreme use
on high performance
monotypes

SUPER SHAPE

Soft Braid 5 - 6 - 7 - 8 are characterized by the exclusive Super Shape finishing with anti-flattening insert. So these ropes are intended for use as sheets on ratchet blocks, where they are subjected to high localized wear; the special Super Shape treatment prevents triangulation.They are the ideal choice for professional monotypes such as Melges, J-70 class and others.

Soft Braid 5

PET + GRIP / DYN

PRODUCT CODE NA26C82

100% SK78 · PU COATED TREATMENT · SUPER SHAPE

CONSTRUCTION Double braid
COVER PET + Grip / Dyneema®
CORE 12 strand braid, made with Dyneema® SK78, impregnated with PU coating and anti-flattening insert.

FEATURES AND USE Sliding cover and resistant to abrasions. Super Shape core with anti-flattening insert. For sheets which are designed to perfectly work on winches and blocks and do not create loops and kinks.

STANDARD DIAMETERS From 6 to 11 mm
STRETCH AT 30% B. L. 2,70%
STRETCH AT B. L. 3,40%

COLOURS

Soft Braid 6

PET + GRIP / KEV

PRODUCT CODE NA26C84

100% SK78 · PU COATED TREATMENT · SUPER SHAPE

CONSTRUCTION Double braid
COVER PET + Grip / Kevlar®
CORE 12 strand braid, made with Dyneema® SK78, impregnated with PU coating and anti-flattening insert.

FEATURES AND USE The cover is very resistant to temperature abrasions. Super Shape core with anti-flattening insert. For sheets which are designed to perfectly work on winches and blocks and suffer from high temperature wear and tear, reached during fast surges. It does not create loops and kinks.

STANDARD DIAMETERS From 6 to 11 mm
STRETCH AT 30% B. L. 2,70%
STRETCH AT B. L. 3,40%

COLOURS

Soft Braid 7

PET + GRIP / DYN / KEV

PRODUCT CODE NA26C83

100% SK78 · PU COATED TREATMENT · SUPER SHAPE

CONSTRUCTION Double braid
COVER PET + Grip / Dyneema® / Kevlar®
CORE 12 strand braid, made with Dyneema® SK78, impregnated with PU coating and anti-flattening insert.

FEATURES AND USE The cover is very resistant to temperature abrasions. Super Shape core with anti-flattening insert. For sheets which are designed to perfectly work on winches and blocks and suffer from wear and tear due to numerous maneuvers. It does not create loops and kinks.

STANDARD DIAMETERS From 6 to 11 mm
STRETCH AT 30% B. L. 2,70%
STRETCH AT B. L. 3,40%

COLOURS

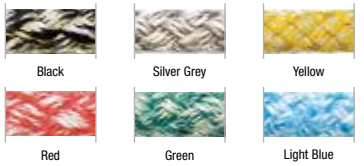

Soft Braid 8

NEW

BTEC / CDYN / PET

PRODUCT CODE NA26C85_CDY

100% SK78 · PU COATED TREATMENT · SUPER SHAPE

CONSTRUCTION Double braid
COVER Black Technora® / Black Dyneema® / Black Polyester
CORE 12 strand braid, made with Dyneema® SK78, impregnated with PU coating and anti-flattening insert.

FEATURES AND USE The cover is very resistant to temperature abrasions. Super Shape core with anti-flattening insert. For sheets which are designed to perfectly work on winches and blocks and suffer from wear and tear due to numerous maneuvers. It does not create loops and kinks.

STANDARD DIAMETERS From 6 to 11 mm
STRETCH AT 30% B. L. 2,70%
STRETCH AT B. L. 3,40%

COLOURS

Furling line

FURLING LINE, DESIGNED TO RESPOND TO THE EVOLUTION OF FORE SAILS FURLING SYSTEMS. EACH TYPE OF BOAT, OF FURLER AND EACH CREW REQUIRES SPECIFIC PRODUCTS, THAT ARE SUITABLE FOR THE EQUIPMENT ON BOARD AND, THAT AT THE SAME TIME ALLOW AN EASY FURLING OF THE SAILS, EVEN IN DIFFICULT SITUATIONS, UNDER LOAD, WITH ROUGH SEA AND WHENEVER THERE IS LITTLE GRIP. THE SINGLE PRODUCTS OF THIS LINE HAVE DIFFERENT CHARACTERISTCS, IN ACCORDANCE TO THE EXPECTED PERFORMANCE. ALL OF THEM HAVE BEEN EXTENSIVELY TESTED.

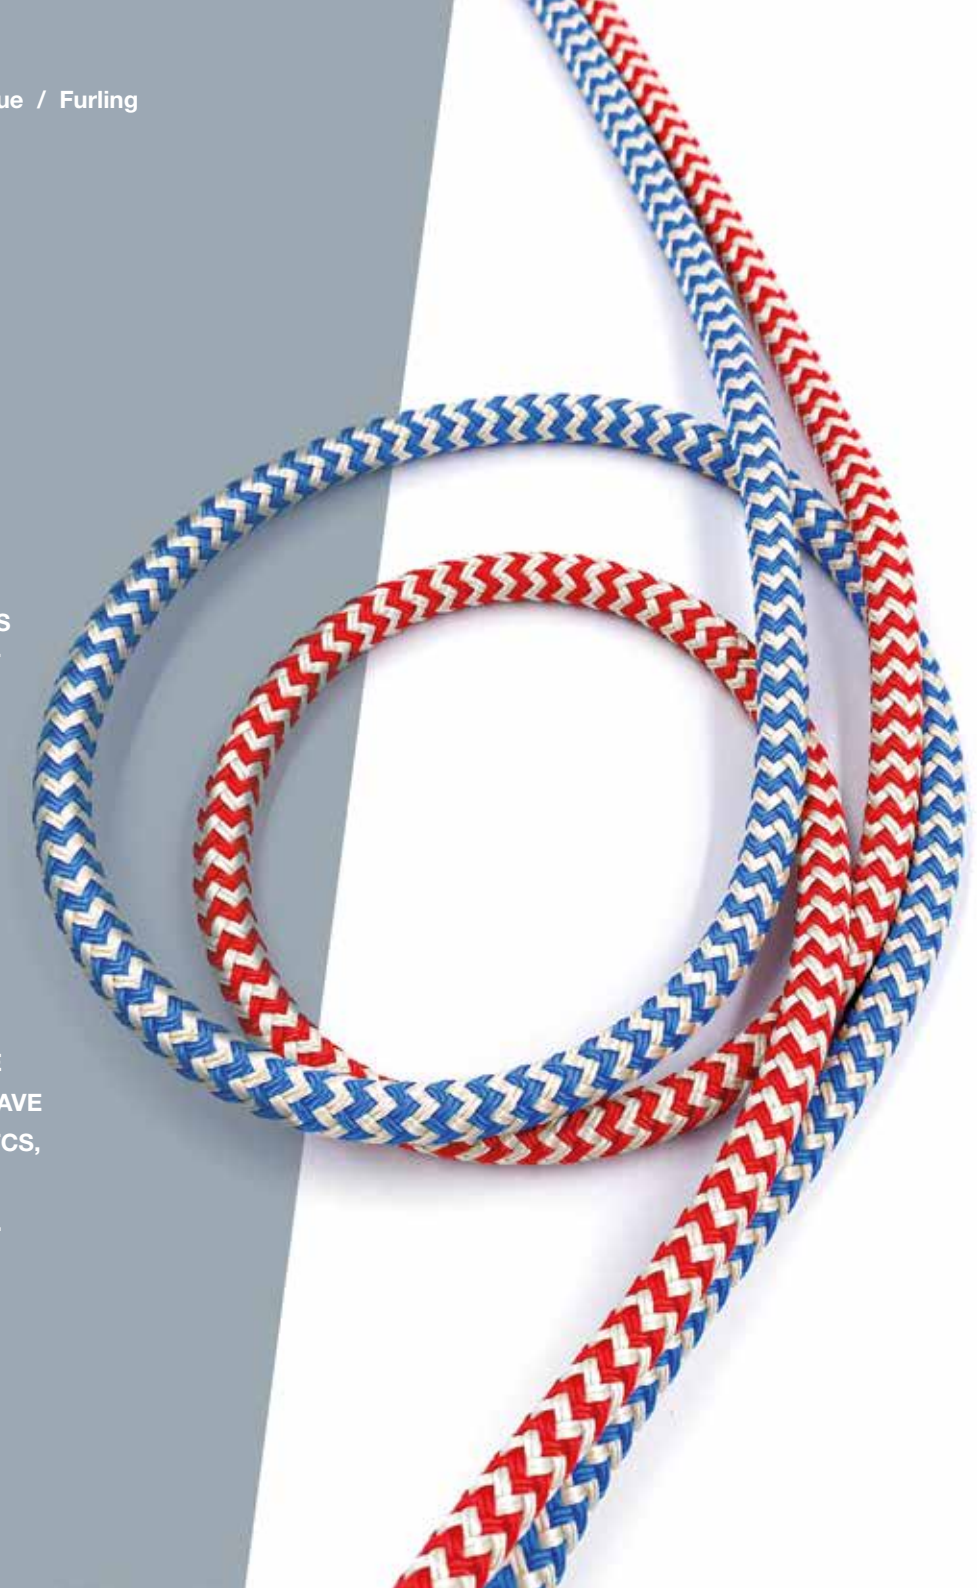

Tornado 1

NEW

PRODUCT CODE NA71C87

CONSTRUCTION Double braid
COVER Vectran® / Polyester
CORE 100% PET HT

FEATURES AND USE The polyester core is making this rope more elastic and less performing in terms of breaking load. Nevertheless, the quality of the cover in terms of grip and resistance to abrasion is very good.

STANDARD DIAMETERS From 7 to 13 mm
STRETCH AT 30% B. L. 5,50%
STRETCH AT B. L. 12,00%

COLOURS Snake Vectran® / Polyester to choose from White / Black / Red / Light Blue / Green / Yellow / Silver Grey / Orange Fluo

DIAMETER	B. L.	WEIGHT
[mm]	[daN]	[g /m]
7	1.320	53,00
9	2.200	74,00
11	3.163	99,00
12	3.630	111,00
13	4.290	128,00

Tornado 2

PRODUCT CODE NA89C87

NEW

100% HMPE

CONSTRUCTION Double braid
COVER Vectran® / Polyester
CORE 100% HMPE

FEATURES AND USE The core in HMPE fiber, places the performance of this rope halfway between Polyester and Dyneema® SK78. Medium/low stretch and good breaking load. The cover, which is exactly the same as for version 1 and 3, improves the performance of the rope thanks to a lower stretch of the core.

STANDARD DIAMETERS From 7 to 13 mm
STRETCH AT 30% B. L. 4,00%
STRETCH AT B. L. 5,60%

COLOURS Snake Vectran® / Polyester to choose from White / Black / Red / Light Blue / Green / Yellow / Silver Grey / Orange Fluo

DIAMETER	B. L.	WEIGHT
[mm]	[daN]	[g /m]
7	1.475	49,00
9	2.375	70,20
11	3.850	93,10
12	4.800	98,40
13	5.450	110,00

Tornado 3

PRODUCT CODE NA48C87

NEW

100% SK78

CONSTRUCTION Double braid
COVER Vectran® / Polyester
CORE 100% Dyneema® SK78

FEATURES AND USE Dyneema® SK78 increases the breaking load and decreases the overall stretch of the rope and exactly this property is a must have wherever a quick and precise furling of the sail is required. The core is more stable and doesn't scare heavy stress also caused by its use on electric winches.

STANDARD DIAMETERS From 7 to 13 mm
STRETCH AT 30% B. L. 2,80%
STRETCH AT B. L. 3,80%

COLOURS Snake Vectran® / Polyester to choose from White / Black / Red / Light Blue / Green / Yellow / Silver Grey / Orange Fluo

DIAMETER	B. L.	WEIGHT
[mm]	[daN]	[g /m]
7	2.288	48,00
9	3.608	70,00
11	6.039	93,00
12	6.292	97,50
13	7.128	108,00

Tornado 4

PRODUCT CODE NA17C86

NEW

100% SK78

PU COATED TREATMENT

CONSTRUCTION Double braid
COVER Black Technora® / Polyester
CORE 100% Dyneema® SK78 + PU

FEATURES AND USE The Dyneema® SK78 core manages the reduce the crushing of the rope keeping it round and compacted, while the construction of the cover, made of Black Technora and HT Polyester has a great grip and an amazing resistance to abrasions and UV rays. This is the ideal product for high performance boats.

STANDARD DIAMETERS From 7 to 13 mm
STRETCH AT 30% B. L. 2,60%
STRETCH AT B. L. 3,60%

COLOURS Snake Black Technora® / Polyester to choose from White / Black / Red / Light Blue / Green / Yellow / Silver Grey / Orange Fluo

DIAMETER	B. L.	WEIGHT
[mm]	[daN]	[g /m]
7	2.600	38,50
9	4.100	60,50
11	6.100	86,20
12	7.562	101,60
13	8.100	120,55

Rigging line

THE RIGGING LINE PRODUCTS MEET THE NEEDS OF THOSE WHO, FOR WORK OR FOR PASSION, DEVELOP RIGGING APPLICATIONS AND OPTIMISATION IN THE RIGGINGS, FINDING QUALITY ITEMS AND AVANT-GARDE PROPOSALS, WITH A WIDE RANGE OF SIZES, FINISHING AND COLOURS.

Protection cover

Armare has created a new range of Protection covers for technical ropes. The fibers used to produce them have the highest thermic resistance, with a melting point up to 650 °C and an excellent mechanical abrasion resistance. These products show the highest level of performance and an extreme traction resistance.

USE: Protection Covers are ideal to protect the critical points where the ropes run at high speed, with continuous friction and heavy loading, i.e. to defend the exit points of halyards at the top of masts and on stoppers, to protect sheets and tackles on winches and all the running rigging subject to high stress.
The diameter must be read as diameter of the finished rope when the core is inserted.

Protection cover

PRODUCT CODE NA00

DYN WHITE NATURAL
Cover in Dyneema® White Natural

BTEC
Cover in Black Technora®

KEV+DYN
Cover in Kevlar® + Dyneema®

DYN PURE BLACK PU COATED
Cover in Dyneema® Pure Black + PU

BTEC+DYN
Cover in Black Technora® + Dyneema®

KEV+DYN+PET
Cover in Kevlar® + Dyneema® + Polyester

DYN PU COATED SILVER GREY
Cover in Dyneema® + PU Silver Grey

BTEC+DYN+PET
Cover in Black Technora® + Dyneema® + Polyester

KEV+PET
Cover in Kevlar® + Polyester

PBO
Cover in PBO-Zylon®

BTEC+PET
Cover in Black Technora® + Polyester

CRD+PET
Cover in Cordura® + Polyester

PET
Cover in Polyester

Supercable

The special double braid construction with Dyneema® cover provides: minimum elongation, high tensile strength, low weight, maximum cable flexibility, easy splicing and excellent durability. This cable is particularly suitable for the production of runners, forestays, removable forestay, backstay, structural strops, bobstay and the standing rigging of small boats. It also finds wide use on life lines, replacing the steel wire ropes. Supercable 78 and 99 differ in terms of breaking load and lightness. Indeed Supercable 99 guarantees higher performance and lighter weight compared to the ratio between diameter and breaking load.

Supercable 99

PRODUCT CODE N042_99

100% SK99 · HPS TREATMENT · PU COATED TREATMENT

CONSTRUCTION Double braid
COVER Dyneema® SK78 + PU
CORE Dyneema® SK99 + HPS + PU
COLOUR Grey, black on order

DIAMETER	BREAKING LOAD	WEIGHT
[mm]	[daN]	[g /m]
4	1.444	12,00
5	2.800	19,00
6	4.282	28,00
7	6.200	40,00
8	8.080	45,00
9	9.836	54,00
10	12.446	71,00
11	14.680	83,00
12	15.550	92,00
13	17.300	114,00
14	18.220	140,00

Supercable 78

PRODUCT CODE N042

100% SK78 · HPS TREATMENT · PU COATED TREATMENT

CONSTRUCTION Double braid
COVER Dyneema® SK78 + PU
CORE Dyneema® SK78 + HPS + PU
COLOUR Grey, black on order

DIAMETER	BREAKING LOAD	WEIGHT
[mm]	[daN]	[g /m]
4	1.155	12,00
5	2.250	19,00
6	3.087	28,00
7	4.995	40,00
8	6.400	45,00
9	8.550	54,00
10	9.716	71,00
11	11.600	83,00
12	14.500	92,00
13	16.000	114,00
14	17.780	140,00

Zero Twist Cable

PRODUCT CODE VA55

100% VECTRAN PU COATED TREATMENT

Characterized by a particular rigidity, thanks to the special anti-torsion treatment, this cable is designed to be used in the luff of the sails or as a means of torsion transmission in a furling system for spherical sails. The low stretch and the high breaking load make it ideal for the replacement of the double cable into the luff of Code Zero. Available both in roll and spliced.

CONSTRUCTION Double Braid. Vectran® HS core with PU coating, Polyester cover with anti torsion treatment

DIAMETER	BREAKING LOAD	WEIGHT
[mm]	[daN]	[g /m]
6	1.100	36,92
7	1.800	45,95
9	3.500	72,75
11	5.500	98,60
13	9.000	136,84
16	14.000	204,90
18	16.800	271,14

Unidir Loop

100% SK99 100% SK78 PU COATED TREATMENT

Designed for replacing steel shackles and all the steel links on-board, these loops have higher specifications as they are built with unidirectional winding yarns. Dyneema® SK99 fiber is used for the core, while Dyneema® SK78 is used to produce the protection braid treated with a special anti-abrasion coating too. These products guarantee the best ratio diameter/breaking strength available on the market; they can be used in linear and double (basket) configuration as well as with a T-Bone. Warning: The use in different configurations affects the breaking load. Further sizes are available on request.

CONSTRUCTION Multifilament and unidirectional winding yarns
COVER Dyneema® SK78 treated with a special anti-abrasion coating
CORE Unidirectional Dyneema® SK99

CODE	LENGTH	LINEAR B.L.	DIAMETER
	[mm]	[daN]	[mm]
N202UDLOOP 2.2-150	150	2.200	**6**
N202UDLOOP 2.2-200	200	2.200	**6**
N202UDLOOP 3.0-150	150	3.000	**7**
N202UDLOOP 3.0-200	200	3.000	**7**
N202UDLOOP 3.0-250	250	3.000	**7**
N202UDLOOP 5.0-100	100	5.000	**9**
N202UDLOOP 5.0-150	150	5.000	**9**
N202UDLOOP 5.0-200	200	5.000	**9**
N202UDLOOP 5.0-250	250	5.000	**9**
N202UDLOOP 6.0-250	250	6.000	**10**
N202UDLOOP 8.0-150	150	8.000	**12**
N202UDLOOP 8.0-200	200	8.000	**12**
N202UDLOOP 8.0-250	250	8.000	**12**
N202UDLOOP 10.0-150	150	10.000	**13**
N202UDLOOP 10.0-200	200	10.000	**13**
N202UDLOOP 10.0-250	250	10.000	**13**
N202UDLOOP 10.0-700	700	10.000	**13**
N202UDLOOP 12.0-150	150	12.000	**16**
N202UDLOOP 12.0-200	200	12.000	**16**
N202UDLOOP 12.0-250	250	12.000	**16**
N202UDLOOP 15.0-150	150	15.000	**19**
N202UDLOOP 15.0-200	200	15.000	**19**
N202UDLOOP 15.0-250	250	15.000	**19**
N202UDLOOP 16.0-250	250	16.000	**20**
N202UDLOOP 18.0-250	250	18.000	**22**

Dyneloop 99_16

NEW

PRODUCT CODE NA10C00_H

100% SK99

Specific braid for the production of loops of strops Made with 100% Dyneema® SK99, this braid has a high breaking load and a low elongation guaranteed by its HPS treatment. Thanks to the absence of coating and to its special construction, both softness and an adequate compactness are added to the product, characteristics which are useful to simplify the execution of loops and strops.

CONSTRUCTION
100% Dyneema® SK99 + HPS (no PU).

STRETCH AT 30% B. L. 1,70%
STRETCH AT B. L. 2,85%

Ø	B. L.	ROLL LENGTH
[mm]	[daN]	[m]
3	1.670	200
4	2.300	200
5	2.715	200
6	3.136	200
7	3.665	200
8	4.428	200

DynElastic

PRODUCT CODE T07_DYN

NEW

Ø	WEIGHT	ROLL LENGTH
[mm]	[g /m]	[m]
2	1,32	100
3	6,10	100
4	12,9	100
5	16,8	100
6	26,2	100
7	36,7	100
8	48,0	100

CONSTRUCTION Elastic braid with a special braided cover in Dyneema®.
STANDARD DIAMETERS From 2 to 8 mm
COLOURS White - Pure Black / Yellow

FEATURES AND US
The Dyneema® cover makes this braid very resistant both to abrasion and to repeated micro-movements on the same point and thanks to its features it limits the over-elongation of the braid itself. Excellent UV resistance. It has been developed thinking about the intense use on catamarans, skiffs and other new concept boats.

Hook Connector for shockcord Clamcleat

PRODUCT CODE PT405

Hook Connector for shockcord up to 8mm (5/16"). Available separately or together with DynElastic cut to size.

COLOURS White and Black.

Lumina Life Line

PRODUCT CODE N042C48

100% SK99 | 100% SK78 | HPS TREATMENT | PU COATED TREATMENT

NEW

The luminescence inserts make the life line visible even at night, improving safety and making easier the movements on the deck during night-time navigation. Thanks to its construction it is simple to splice and to be settle on board, with an elegant clear and effective result. Moreover, its durability and reliability are guaranteed from several tests on racing and cruising boats.

FEATURES Visible in the dark, light, good abrasion resistance, high breaking load, low elongation.
CONSTRUCTION Double braid
COVER Dyneema® SK78 + PU coated
CORE 12 plait with 100% Dyneema® SK99 impregnated with polyurethane coating and special heat treatment HPS.
COLOUR Black or Silver Grey colour with luminescence inserts

DIAMETER	BREAKING LOAD	WEIGHT
[mm]	[daN]	[g /m]
4	1.444	12,00
5	2.500	20,00
6	3.300	28,00

Lazy Line

PRODUCT CODE N030

Soft braid, with the right level of compactness to resist to abrasion; always round and balanced, it is easy to splice. Coupled with Lash Bobbin, it makes the construction of Lazy Jack easy. The result is a look which is both technical and elegant.

COLOURS White, Silver Grey, Anthracite and Hemp (other colours on request)

Ø	B. L.	WEIGHT	LENGTH
[mm]	[daN]	[g /m]	[m]
5	400	18,00	100
6	500	21,00	100
7	600	26,00	100
8	700	30,00	100

Dyneema® Light Shackle

PRODUCT CODE N203 (STANDARD SHACKLE) - N204 (BLOCK SHACKLE)

They can be used to substitute any opening metal hook, guaranteeing safety, resistance and a considerable weight reduction (about 6 times less). Their lightness and the construction with textile fibers help to prevent damage to people due to accidental impacts and to protect the boat surface as well as the mast. What's more, they don't squeak.

CONSTRUCTION The textile Light Shackles are made entirely of Dyneema® SK78 + HPS + PU, without metal parts.

STANDARD SHACKLE	MAX WORKING LOAD	WEIGHT	LENGTH
	[daN]	[g/pc]	[mm]
LS 5	1.250	15	60
LS 8	2.000	23	70
LS 12	3.000	30	80
LS 20	5.000	70	90
LS 24	7.000	90	100

BLOCK SHACKLE	MAX WORKING LOAD	WEIGHT	LENGTH
	[daN]	[g/pc]	[mm]
LS 5B	1.250	17	90
LS 8B	2.000	25	105
LS 12B	3.000	35	125
LS 20B	5.000	77	135
LS 24B	7.000	98	150

Covered Light Shackle

PRODUCT CODE N203C - N204C

NEW

The addition of a protective cover in Black Dyneema® gives greater durability and resistance to an already particularly versatile product such as the traditional uncovered textile shackle. These products are ideal for connecting the sheets to the different bow sails but also to replace steel fittings of deck equipment.

COVER Dyneema® SK78 + PU
CORE Dyneema® SK78 + HPS + PU

STANDARD SHACKLE	MAX WORKING LOAD	WEIGHT	LENGTH
	[daN]	[g/pc]	[mm]
CLS 5	1.250	12	60
CLS 8	2.000	28	100
CLS 12	3.000	45	120
CLS 20	5.000	89	150
CLS 24	7.000	115	190

BLOCK SHACKLE	MAX WORKING LOAD	WEIGHT	LENGTH
	[daN]	[g/pc]	[mm]
CLS 5B	1.250	14	100
CLS 8B	2.000	31	140
CLS 12B	3.000	50	190
CLS 20B	5.000	96	250
CLS 24B	7.000	118	300

Dyneema® Webbing

STANDARD CODE V04 / **LIGHT CODE** V04_L

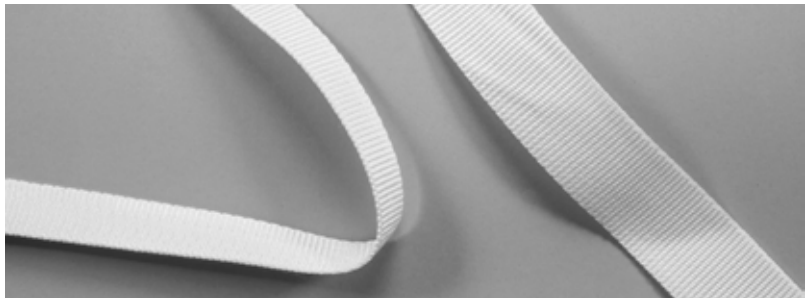

Dyneema® Webbing is very light and extremely resistant to abrasion. It has a high breaking load, a low elongation and an excellent UV resistance.

CONSTRUCTION Fabric tape / **COVER** Dyneema® 100%
STANDARD MEASURES from 20 to 50 mm / **STANDARD COLOUR** White

STANDARD WEBBING

WIDTH	B. L.	WEIGHT	LENGTH
[mm]	[daN]	[g /m]	[m]
20	1.200	11,40	100
25	1.500	15,00	100
30	1.700	17,30	100
35	1.950	19,70	100
40	2.100	22,20	100
45	2.450	25,26	100
50	2.700	27,00	100

LIGHT WEBBING

WIDTH	B. L.	WEIGHT	LENGTH
[mm]	[daN]	[g /m]	[m]
20	840	9,60	50 / 100
25	1.050	11,70	50 / 100
30	1.190	13,90	50 / 100
40	1.470	18,50	50 / 100

Polyester Webbing

WHITE CODE V03 / **BLACK CODE** V03_N

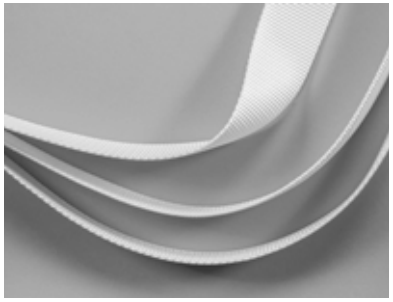

Polyester Webbing has a compact construction as well as a good UV and wear resistance.

CONSTRUCTION Fabric tape / **COVER** Polyester 100%
STANDARD MEASURES from 20 to 50 mm
STANDARD COLOUR White, Black

WHITE WEBBING

WIDTH	B. L.	WEIGHT	LENGTH
[mm]	[daN]	[g /m]	[m]
20	800	27,00	100
25	1.000	34,00	100
30	1.250	40,00	100
40	1.600	54,00	100
50	2.000	67,00	100

BLACK WEBBING

WIDTH	B. L.	WEIGHT	LENGTH
[mm]	[daN]	[g /m]	[m]
25	1.000	25,30	100
30	1.250	33,00	100
40	1.600	44,10	100
50	2.000	54,00	100

Flat Braid

NEW

PRODUCT CODE T08

CONSTRUCTION Flat braid with Polyester HT

FEATURES AND USE
For bindings and reference notches.

DIMENSIONS
3.0 x 0.3 mm

ROLL
Of 15 meters

STANDARD COLOURS
White

Dyneema® Sewing Thread

PRODUCT CODE N211

100% SK75

Braid for special seams that require high tensile strength and low elongation. It slides very easily, is smooth and has an excellent resistance to abrasion and is ideal for the hand sewing of manufactured parts or special splicings. Custom sizes and constructions are also available in addition to those listed.

CONSTRUCTION 100% Dyneema®

Ø	B. L.	ROLL LENGTH
[mm]	[daN]	[m]
0,3	18	300
0,4	50	300
0,6	70	300
0,8	100	300
1	140	300
1,5	230	300

Waxed PRO

PRODUCT CODE N031

High quality waxed braid rolls for professional use. Essential for binding and sewing.

DIAMETERS

1 mm and 1,5 mm

DIAMETER	WEIGHT	LENGTH
[mm]	[g /m]	[m]
1	0,60	500
1,5	1,20	250

COLOURS Solid colour to be chosen between:

T-Bone

PRODUCT CODE N210

The T-Bone is an important part in the application of Loops and Strops on board.
It is designed to withstand a high load, because of its position in the clash between the two eyes of loop or strop. On request they can be made with titanium or bronze finish to be used on vintage boats. Five sizes available, measured to hold different shear tested breaking loads.

CONSTRUCTION T-Bones are made with 17-4PH steel.



CODE	B. L.	WEIGHT	A	B	C	D
	[daN]	[g / pc]	[mm]	[mm]	[mm]	[mm]
TB 0	**1.800**	8,00	9	25,5	5,5	8,5
TB 1	**3.000**	20,70	13	33	7,5	11,5
TB 2	**4.000**	28,60	15	40,50	8,5	13
TB 3	**5.000**	47,60	18	48	10	15,5
TB 4	**9.000**	88,40	22	55	12,5	19

Tie Plastic Balls

Balls made of hard plastic, ideal to stop the control lines.

COLOURS

Black - Blue
Green - Red

CODE	EXTERNAL DIAMETER	ROPE DIAMETER
	[mm]	[mm]
RF1316BLK	25	5
RF1316BLU	25	5
RF1316GRN	25	5
RF1316R	25	5
RF1317BLK	20	5
RF1317BLU	20	5
RF1317GRN	20	5
RF1317R	20	5
RF1318BLK	16	4
RF1318BLU	16	4
RF1318GRN	16	4
RF1318R	16	4

Halyard Plastic Balls

Balls made of hard plastic, ideal to stop halyards.

COLOURS

Black - Blue
Green - Red

CODE	EXTERNAL DIAMETER	ROPE DIAMETER
	[mm]	[mm]
PNP272A	32	15.5
PNP272ABLU	32	15.5
PNP272AR	32	15.5
PNP272AGRN	32	15.5
N215440	44	11.3

Lash Bobbin

PRODUCT CODE N200LB

Used both for running and standing rigging and to obtain optimal distribution of the load on lashings, replacing blocks when the rope undergoes little sliding, such as the vang fall system, backstay fall systems, etc. They can be used with loops, strops and spliced on ropes. Available in different sizes.

CODE	Ø	S. W. L.	THICK-NESS	Ø MAX ROPE	HOLE
	[mm]	[daN]	[mm]	[mm]	[mm]
LB 0	**18,6**	400	8	5	7,20
LB 1	**25**	750	10	6	9
LB 2	**38**	1.500	13	9	15
LB 3	**48**	3.000	17	11	19
LB 4	**55**	4.000	20	13	21
LB 5	**59**	4.500	20	13	25
LB 6	**69,6**	5.900	31	22	29

Big Bobbin for Loop

PRODUCT CODE N200LBB

The Big Bobbin for Loops differ from the lash bobbins exclusively for the broader measures of the groove, allowing the housing of the loops when in basket configuration (double).

CODE	Ø	S. W. L.	THICK-NESS	Ø MAX ROPE	HOLE
	[mm]	[daN]	[mm]	[mm]	[mm]
LBB 1	**38**	1.500	18	14	15
LBB 2	**48**	3.000	24	18	19
LBB 3	**55**	4.000	29	22	21
LBB 4	**59**	4.500	30	22	25
LBB 5	**69,6**	5.900	41	32	29

Coating PU

PRODUCT CODE N213

Water-based polyurethane coating. Solution essential for the protection of ropes without cover. Useful for the application on used ropes or on new ropes that have undergone special working processes and require a further application of protective resin. Suitable to be used on any technical fiber. Sold in cans of 0,5 and 1,0 litre, it can be diluted in water, depending on the required degree of impregnation. Application: by brush or immersion with subsequent squeezing of the excess coating and successive open air drying.

Electrical Heat-Cutter

PRODUCT CODE N300

Electric heat-cutter for manual heat cutting of ropes and synthetic ribbons.
Blade, CE conformity declaration and instructions are provided with the product.

Supply voltage: 230 V - 50 Hz
Power input: 60 Watt
Blade temperature: 600 °C reached in about 8 seconds.

Electronic Heat-Cutter

PRODUCT CODE N300_120W

Electronic heat-cutter for manual heat cutting of ropes and synthetic ribbons, also of big dimensions. Low weight, reliability, very short heating time.
Blade, CE conformity declaration and instructions are provided with the product.

Supply voltage: 230 V - 50 Hz
Power input: 120 Watt max
Blade temperature: 600 °C reached in less than 6 seconds.

Envelope Containing 5 Needles for Sewing

PRODUCT CODE N303_NEEDLES

Envelope containing 5 needles for bindings and sewing.
Assorted sizes 13 to 19 mm.

10 Needles for Sewing

PRODUCT CODE N307_NEEDLES

Tube containing 10 needles for sewing.
Assorted sizes 14 to 18 mm.

Splicing Kit Selma

PRODUCT CODE N302_SPLICING-KIT

Spicing kit containing 5 needles made with 316 polished stainless-steel. It can be used for the splicing of single and double braids from diameter 4 to 18 mm. The kit is supplied with instruction.

D-Splicer Set

PRODUCT CODE N302_DSPLICERSET

Set made of 4 needles for the splicing of ropes thinner than 5 mm diameter.

Special Scissors

PRODUCT CODE
N300_FORBICI_15
N300_FORBICI_24

Special scissors to cut Dyneema®, Vectran® and Kevlar®.
They are available in 2 different sizes:
- Scissors blade 15 cm
- Scissors blade 24 cm

Sail Repair Kit

PRODUCT CODE N371_REPAIR

Sail repair Kit comprises: one leather Sewing Palm, one tube of 10 assorted sail needles, waxed sewing thread, beeswax.

20 Needles for Sewing

PRODUCT CODE N304_NEEDLES

Tube containing 20 needles for sewing.
Assorted sizes 14 to 18 mm.

Marlin Spike

PRODUCT CODE
N301_MARLIN_175
N301_MARLIN_265

Marlin Spikes for the splicing on strand ropes available in two leghts:
175 mm for ropes up to 16 mm diameter
265 mm for ropes up to 30 mm diameter.

F-Series Needle

PRODUCT CODE N302_DISPLICER

Stainless-steel needles, with fixed handle for easy pulling.
They are available in 3 different sizes:
- F15 mm 1.5: for ropes from 2 to 4 mm
- F20 mm 2.0: for ropes from 4 to 6 mm
- F25 mm 2.5: for ropes from 6 to 8 mm

Armare Splicing Tape

PRODUCT CODE N304_TAPE_ARMARE

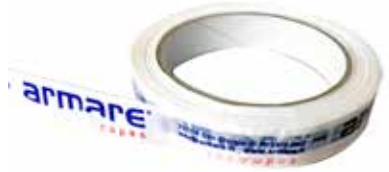

Armare tape for splicing.
High: 19 mm
Length: 66 m

Multiuse line

LIFE ON BOARD ASKS FOR DIFFERENT TYPES OF ROPES AS THEY ARE DESTINED TO MULTIPLE USES, E.G. FROM FENDERS TO ANCHORING, FOR STARTING ENGINE OR FOR MOUSING LINES. WITH THE PRODUCTS OF ITS MULTIUSE LINE, ARMARE COVERS ALL KIND OF USE ON BOARD, FOR HANDCRAFTED SOLUTIONS AS WELL AS FOR SEWING. OPTIMUM QUALITY MATERIALS GUARANTEE DURABILITY EVEN WHERE NO SPECIFIC TECHNICAL REQUIREMENTS ARE GIVEN.

MULTIUSE - BREAKING LOAD AND WEIGHT COMPARATIVE TABLE

Ø	FENDER BRAID		FANTASY		PROROPE		SAGOLA		DELPHINUS	
	N021		N009		N010		N016		N013	
DIAM	B. L.	WEIGHT	B. L.	WEIGHT	B. L.	WEIGHT	B. L.	WEIGHT	B. L.	WEIGHT
[mm]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]	[daN]	[g /m]
0,6	**-**	-	**-**	-	**-**	-	**29**	0,80	**-**	-
0,8	**-**	-	**-**	-	**-**	-	**46**	1,10	**-**	-
1	**-**	-	**-**	-	**-**	-	**50**	1,60	**-**	-
1,5	**-**	-	**-**	-	**-**	-	**79**	2,10	**-**	-
2	**-**	-	**-**	-	**-**	-	**132**	3,20	**-**	-
2,5	**-**	-	**-**	-	**-**	-	**143**	4,40	**-**	-
3	**-**	-	**-**	-	**-**	-	**192**	5,50	**-**	-
3,5	**-**	-	**-**	-	**-**	-	**271**	8,60	**-**	-
4	**-**	-	**320**	16,00	**200**	13,75	**320**	16,00	**200**	9,00
4,5	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-
5	**-**	-	**400**	22,00	**350**	23,33	**400**	22,75	**-**	-
6	**-**	-	**500**	30,00	**460**	28,33	**500**	30,00	**300**	14,00
7	**-**	-	**-**	-	**670**	39,27	**-**	-	**-**	-
8	**1.500**	38,00	**950**	50,00	**880**	56,75	**-**	-	**400**	22,00
9	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-
10	**1.900**	78,00	**1.350**	75,00	**1.200**	86,67	**-**	-	**500**	33,00
11	**-**	-	**-**	-	**-**	-	**-**	-	**-**	-
12	**2.150**	88,00	**1.900**	100,00	**1.700**	113,55	**-**	-	**800**	45,00
14	**2.630**	100,00	**2.500**	140,00	**2.230**	160,00	**-**	-	**-**	-
16	**3.450**	112,00	**3.300**	185,00	**3.000**	210,00	**-**	-	**-**	-
18	**-**	-	**4.200**	240,00	**3.800**	240,00	**-**	-	**-**	-

NOTE ABOUT BREAKING LOAD AND DIAMETERS The average values shown above are derived from tests taken at Armare laboratory, with linear ropes, and may change without notice. Other diameters available on request. The static load of the rope must not exceed 20% of breaking load shown in the table. Knotsmay affect the breaking load of the rope with reductions of up to 60%. The use and exposure to weather conditions, depending from the kind of rope and the time of exposure, can reduce the breaking loads of the ropes.

PET Minirolls

PRODUCT CODE NA38_MIN

CONSTRUCTION 100% Polyester sock.
Core in unidirectional Polyester.
USE Flags, strops, various bindings and sewing.
STANDARD DIAMETERS From 0,8 to 3,5 mm
COLOURS Diameter 0,8 mm, 1 mm and 1,5 mm only white and black. Solid colour with marker from 2 mm.

DIAMETER	B. L.	LENGTH	WEIGHT
[mm]	[daN]	[m]	[g /roll]
0,8	46	50	69,00
1	50	40	60,00
1,5	79	30	63,00
2	132	40	146,00
2,5	143	30	153,00
3	192	20	156,00
3,5	271	15	148,00

STANDARD COLOURS

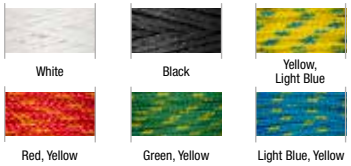

Dyneema® 100% Minirolls

PRODUCT CODE NA67_MIN

100% SK75 PU COATED TREATMENT

CONSTRUCTION 100% Dyneema® braid + PU.
USE Ideal for the hand sewing of manufactured parts or special splicing and for seams that require high tensile strength and low elongation. Very smooth, excellent abrasion resistance.
STANDARD DIAMETERS From 0,6 to 1,5 mm

DIAMETER	B. L.	LENGTH	WEIGHT
[mm]	[daN]	[m]	[g /roll]
0,6	56	60	36,00
0,8	65	50	44,00
1	113	40	51,00
1,5	190	30	62,00

STANDARD COLOURS

Dyneema® / PET Minirolls

PRODUCT CODE NA93_MIN

100% SK75

CONSTRUCTION Polyester sock.
Core with unidirectional Dyneema® SK75.
USE For flags, strops, windsurf and various bindings.
STANDARD DIAMETERS From 2 to 3,5 mm

DIAMETER	B. L.	LENGTH	WEIGHT
[mm]	[daN]	[m]	[g /roll]
2	160	15	58,00
2,5	290	10	56,00
3	340	7	50,00
3,5	400	5	51,00

STANDARD COLOURS



Waxed Braid Minirolls

PRODUCT CODE N026

CONSTRUCTION Waxed Polyester braid.
USE Waxed braid for whipping and sewing.
STANDARD DIAMETERS From 1 to 1,5 mm

DIAMETER	B. L.	LENGTH	WEIGHT
[mm]	[daN]	[m]	[g /roll]
1	-	40	35,00
1,5	-	30	43,00

STANDARD COLOURS

Miniroll display

PRODUCT CODE N400DISPLAY MINI



DESCRIPTION
Display made of alveolar cardboard with side pocket for flyers. Said display will be supplied free of charge together with the first order placed for a complete set of mini-rolls.

SUCH A SET IS COMPOSED OF:
Code NA38_MIN 10 Mini-rolls Sagola PET HT Coloured - diameters from 2,0 to 3,5 mm

Code NA93_MIN 10 Mini-rolls Braid with Dyneema® SK78 core and PET HT cover - fluorescent colours - diameters from 2,0 to 3,5 mm

Code NA38_MIN 10 Mini-rolls Sagola PET HT White and Black - diameters from 0,8 to 1,5 mm

Code N026 15 Mini-rolls Waxed Braid coloured - diameters 1 and 1,5 mm

Would you please choose and confirm your colours and diameters. Without any specification, delivery will include a standard set (as per picture).

DIMENSIONS
Width 38 cm / Height 50 cm / Depth 41 cm

Fender Braid

PRODUCT CODE N021

CONSTRUCTION 24 plait Polyester braid

COVER Polyester

CORE None

FEATURES AND USE Rope suitable for fenders. It is supple, resistant and has a good knot retention.

STANDARD DIAMETERS From 8 to 16 mm

STANDARD COLOURS

Fantasy

PRODUCT CODE N009

CONSTRUCTION Polyester braid

COVER Polyester

CORE Twisted Polyester yarn

FEATURES AND USE This compact and flexible rope is resistant to UV rays, salt water, solvents and chemical products. It is used for fenders, small moorings, towing, anchors of small boats, blinds, biminies, mooring posts and various bindings. It is not suitable for splicing.

STANDARD DIAMETERS From 4 to 18 mm

STANDARD COLOURS

Prorope

PRODUCT CODE N010

CONSTRUCTION M.T. Polyester braided cover

COVER Polyester

CORE Twisted Polyester yarn

FEATURES AND USE The cheapest and multi-use rope. The compact construction gives to this rope an optimal durability although M.T. Polyester has a tendency to slight rigidity. It is recommended for anchoring of small boats, blinds, anchors of small boats, biminies, mooring posts, various bindings and for the delimitation of sea areas.

STANDARD DIAMETERS From 4 to 18 mm

STANDARD COLOURS

Sagola

PRODUCT CODE N016

CONSTRUCTION Polyester braid

COVER Polyester

CORE Multifilament Polyester

FEATURES AND USE Trim line braided in Polyester. Flexible and durable in sunlight. Suitable for flags, all types of boats, for dinghies as well as for windsurfing, kitesurfing, spear fishing and small bindings.

COLOURS Diameter 0,6 mm only white and black. Diameter 0,8 mm, 1 mm and 1,5 mm Solid Colour only. From 2 mm available also in Solid Colour with marker.
Other constructions and colours on request.

STANDARD DIAMETERS From 0,6 to 6 mm

STANDARD COLOURS

Elastic

PRODUCT CODE N014

CONSTRUCTION Braid with core

COVER Polyester

CORE 100% Pure rubber latex

FEATURES AND USE
Resistant to UV rays, to salt and to the bad weather. Having a good duration over time, the elasticity reaches 150 % when new.
Used by sailmakers, upholsterer, tarp-maker and on board for sun shade canopies, covers, bindings, tie-rods and much more besides.

STANDARD DIAMETERS From 2 to 10 mm

STANDARD COLOURS

White, Black markers

Black

NEW COLOURS

Red

Light Blue

Yellow

Availables only for diameters from mm 3 to 6

Delphinus

PRODUCT CODE N013

CONSTRUCTION 16 plait braid

COVER Polypropylene UV stabilized

CORE None

FEATURES AND USE Floating rope, supple and resistant. The multifilament yarns makes this rope very supple, preventing the formation of twists and kinks during the use.
Fit for all boats and various applications: for life buoys, inflatable life rafts, water skiing, signal buoys and for the delimitation of sea areas.

STANDARD DIAMETERS From 4 to 12 mm

STANDARD COLOURS

White, red markers

Engine

PRODUCT CODE N015

CONSTRUCTION Braid with core

COVER Compacted made with thermo-fixed Polyester

CORE Multifilament Polyester

FEATURES AND USE Flexible and resistant against chafe. Specifically indicated for starting engines.

STANDARD DIAMETERS From 2 to 6 mm

STANDARD COLOURS

White

Multihull Dyneema® net

NEW

PU COATED TREATMENT

PRODUCT CODE RETE_DYN

CONSTRUCTION Knotless trampoline net, made with 100% Dyneema® impregnated with Polyurethane coating - square mesh.

FEATURES AND USE The best solution for catamarans and trimarans trampoline netting systems. It ensures an easy installation and durability, provides low stretch, low weight, no water absorption and excellent resistance to UV rays and abrasion.

STANDARD SIZE
Available meshes: 15x15 mm / 22x22 mm
Length and width on request. This net is supplied without hemline.

STANDARD COLOURS

White

Silver Grey

Guardrail net

NEW

PRODUCT CODE RETE_60/50

CONSTRUCTION Braid 2,5 mm in Polyester H.T. manually knotted - square mesh. Height cm 60 - roll length m 50.

FEATURES AND USE Net usually installed on guard wires to improve safety onboard and preventing children and/or pet falling.

STANDARD SIZE
Roll length 50 m - 40x40 mm mesh
Other sizes and colours on request.

STANDARD COLOURS

White

Armare Shop Rack

PRODUCT CODE N400SHOP RACK

DESCRIPTION

Armare Shop Rack is a new **modular concept** to show Armare rolls in stores. Made of black painte powder coated steel, thanks to a modular concept, with this rack different compositions can l created, such as in height **(up to 3 times)**, laterally or as a corner rack.

Supplied with three bars for the exhibition of rolls as well as with a wall fixing system.

You're kindly required to confirm the desired configuration in order to give us the chance to inclu all the necessary pieces to compose your Shop Rack.

DIMENSIONS OF BASE MODULE

Width 101 cm
Module Height 108 cm
Banner Armare Height 30 cm
Depth 35 cm

DIMENSIONS OF BASE MODULE

CORNER

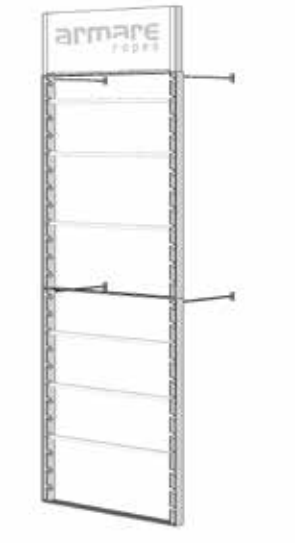

DOUBLE MODULE

Armare bag for ropes

PRODUCT CODE SACCA_70

NEW

DESCRIPTION

Ample, waterproof bag in polyester, equipped with handles as well as with belts in order to be carried either as a bag or as a backpack.

CAPACITY

70 liters

COLOUR

Sea Blue

Use and safety instructions of the products

Values and technical characteristics published in this catalogue have to be considered purely indicative and are related to brand new ropes, adequately spliced.

The use of knots as well as imprecise or incorrect splicing methods may reduce breaking loads by up to 50%.
Splicing increases the diameter of the rope up to 1,5 times.

As indicated in the margin of every illustrative table, the workload must never exceed 30% of the indicated breaking load.

Ropes under load should never be used in contact with rough surfaces, rust or sharp edges, as this may lead to sudden breakage of the ropes or irreparable damage of the same.

No responsibility can be charged to Armare for damages to people or things caused by an incorrect, unsafe or improper use of the ropes.

It is suggested rinsing the ropes with soft water (after their removal from the boat) every two to three months or at least at the end of each season. This precaution extends their durability and guarantees a better performance.

All products are subject to changes without prior notice. Armare declines any responsibility about eventual printing error, e.g. values, descriptions and technical characteristics of the items in this catalogue.

Armare Ropes

The Armare Ropes product range is also available online at:
www.armareropes.com

All products can also be purchased directly online on the Armare Store:
www.store.armareropes.com

Finally there are various publications that group the different product lines, you can found them online in PDF version or you can request a hard copy by contacting Armare Ropes customer support: **info@armare.it**

Armare Ropes product catalogs

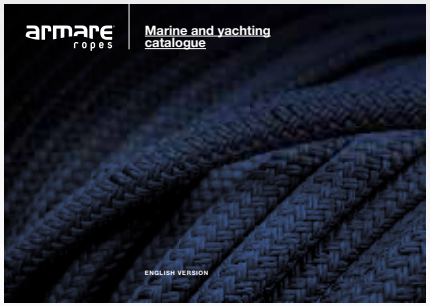

Marine & yachting catalogue

Composite cables and standing rigging

Sailmaker line

PDF versions of the catalogs can be downloaded from **www.armareropes.com**

Diving line catalogue

One Design line



Mooring line pamphlet



Marine & yachting pocket catalogue

Armare
Official Supplier

Armare Ropes, official supplier to FIV
(Italian Sailing Federation)
and supporter of the Italian Olympic Team
as well as of the AICO National Competitive Team.

via Meucci, 3 - Z. I. Aussa Corno
33058 San Giorgio di Nogaro (Udine) - ITALY
T +39 0431 65575 / e-mail: info@armare.it

www.armareropes.com

Designed and Printed in 2021. All rights reserved to Armare s.r.l. Although the information in this catalogue is presented in good faith and believed to be correct at the time of printing, Armare s.r.l. makes no representations or warranties as to the completeness or accuracy of the information. Armare s.r.l. has no liability for any errors or omissions in the materials.
Possession of our price list or literatures does not constitute an offer to sell.

Graphic Design: FiveStudio.it

Photo: Emirates Team New Zealand / Hamish Hooper / Richard Hodder / Nicola Brollo / Luca Cantini / Gianluca di Fazio / Armare Archive / Shutterstock / Fabio Taccola / Sailing Energy / Martina Orsini / Renato Tebaldi / Matias Capizzano / Andrea Falcon / Elena Giolai / One Palma

armare ropes

via Meucci, 3 - Z. I. Aussa Corno
33058 San Giorgio di Nogaro (Udine) - ITALY
T +39 0431 65575 / e-mail: info@armare.it

www.armareropes.com

OFFICIAL SUPPLIER 2021
Defender America's Cup 36

Emirates TEAM NEW ZEALAND