





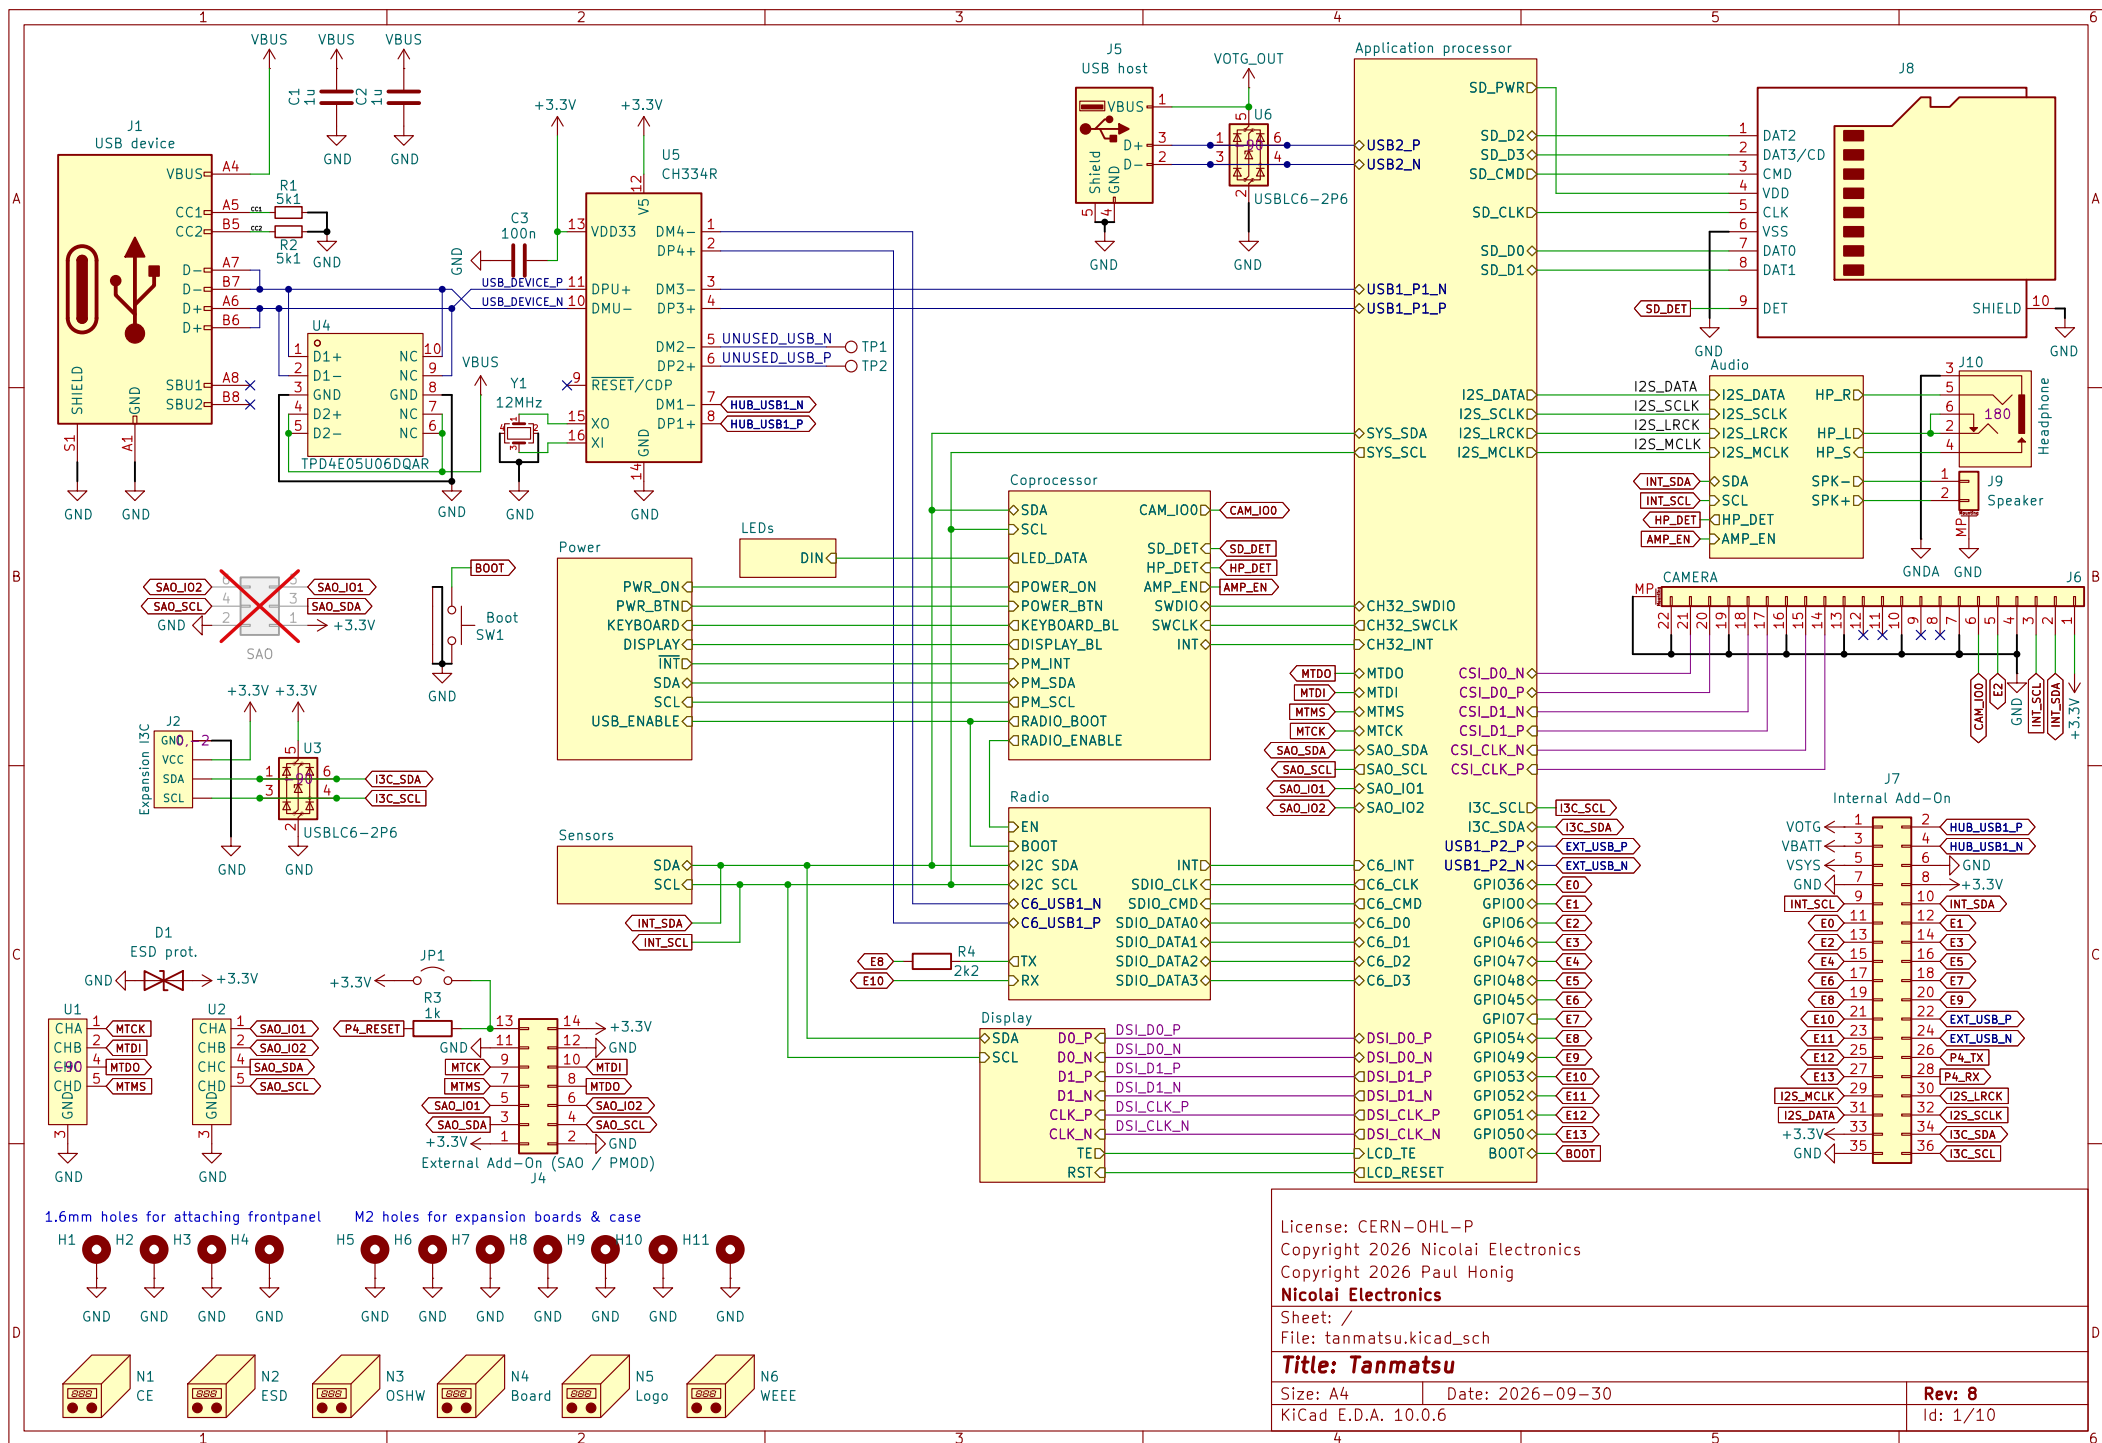

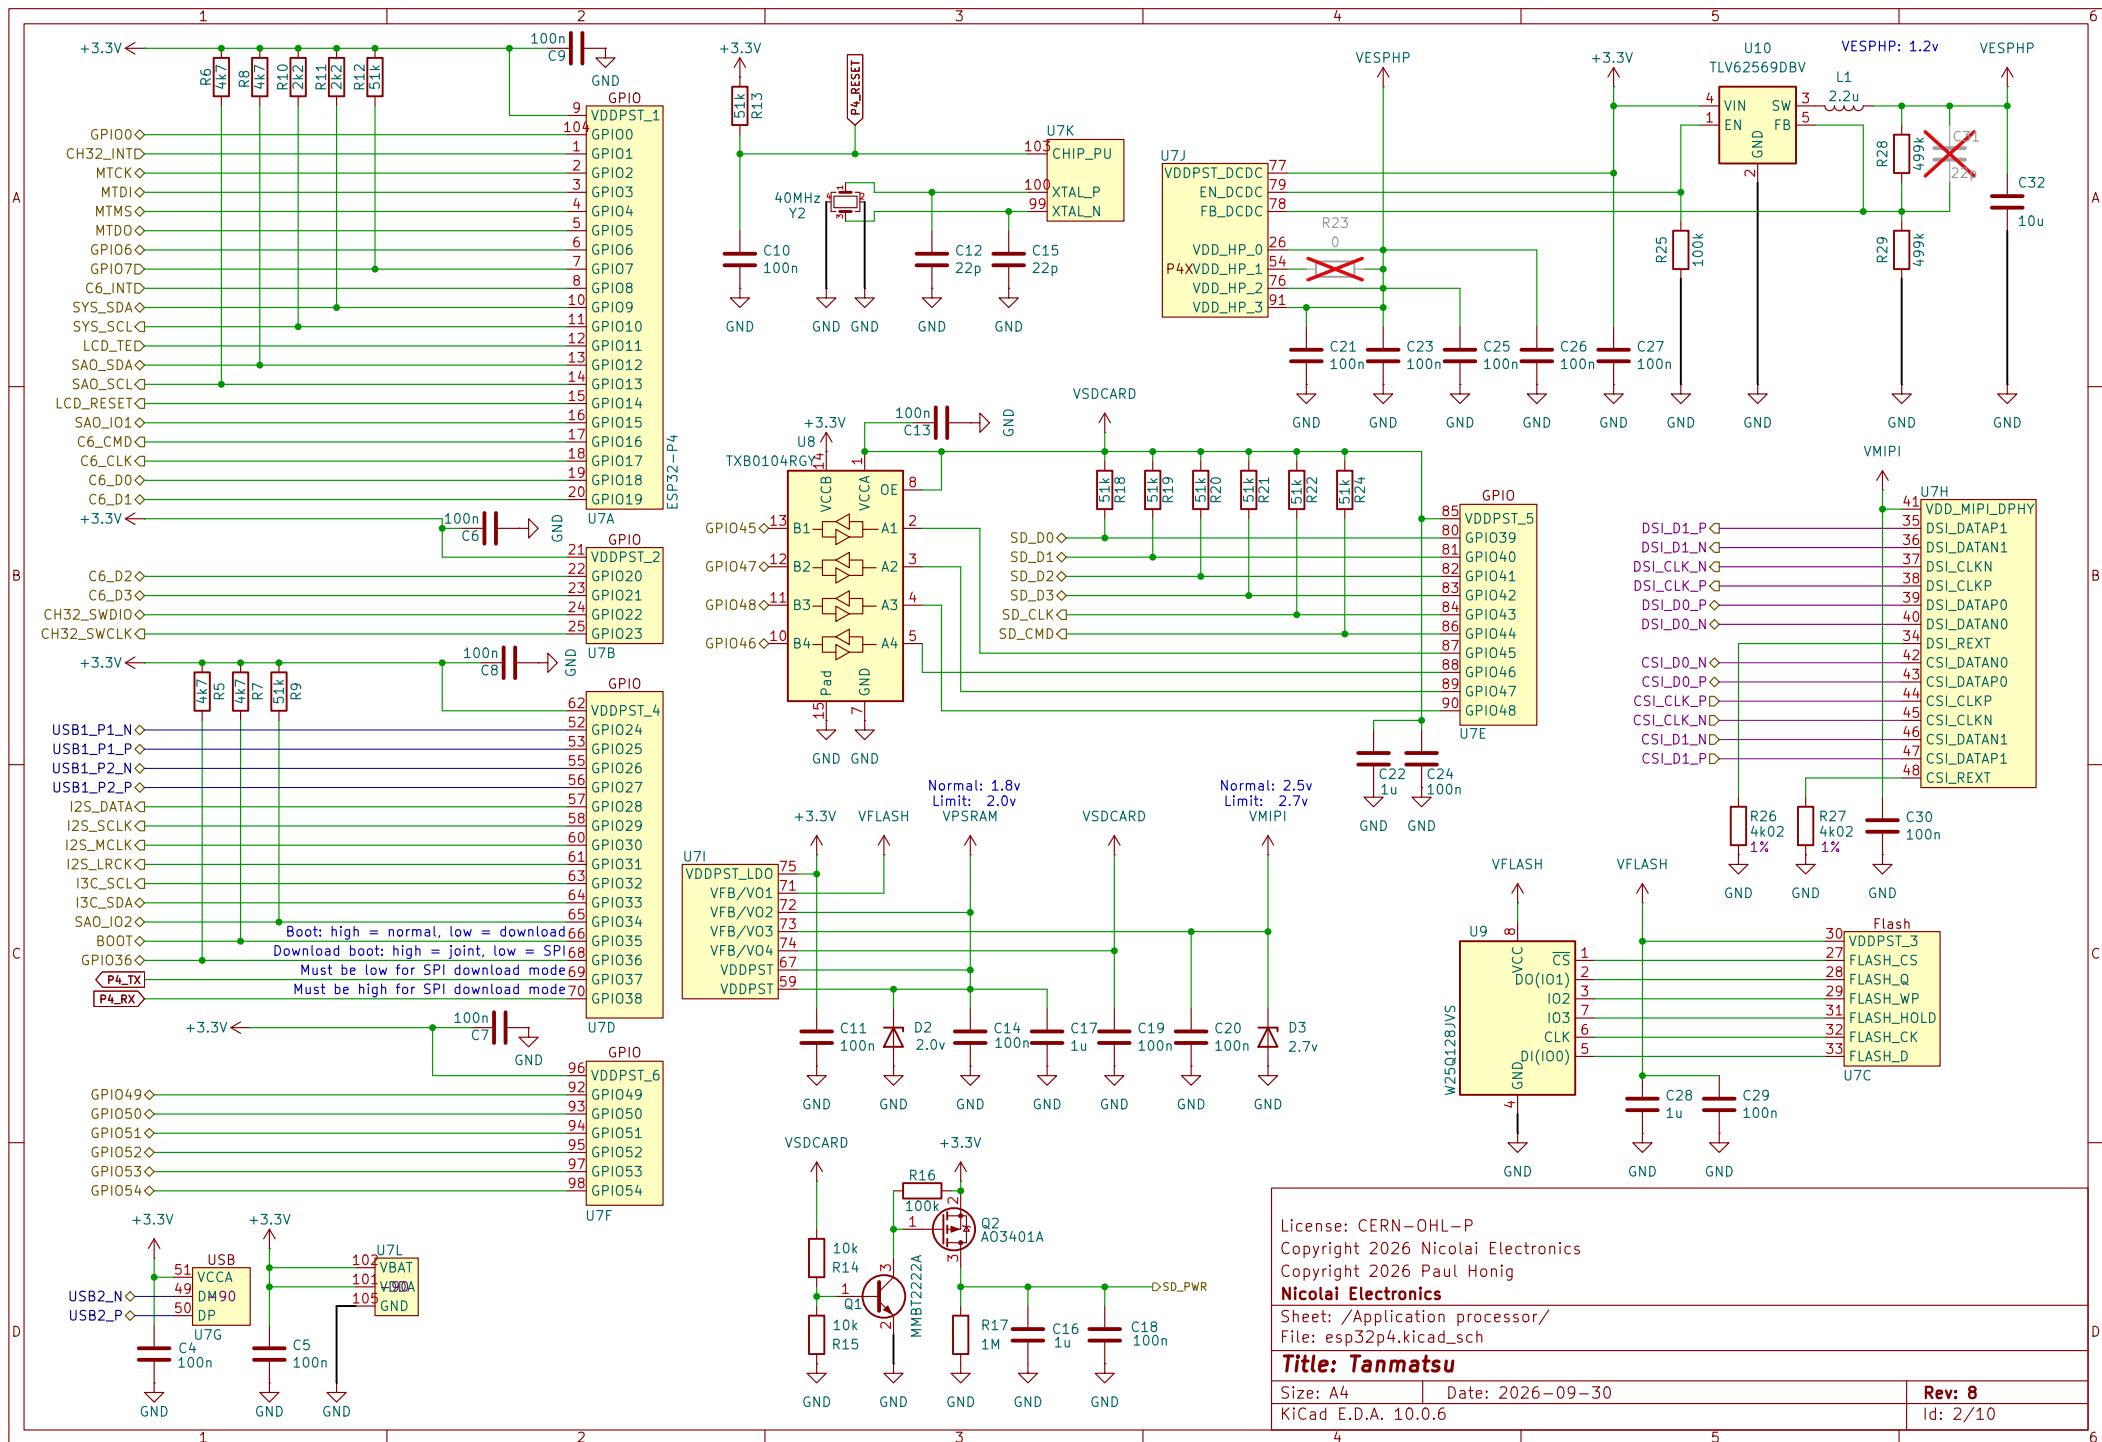

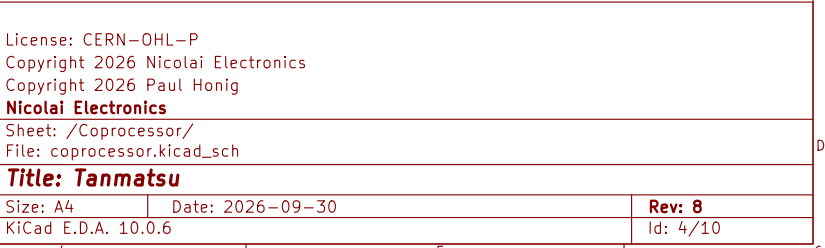

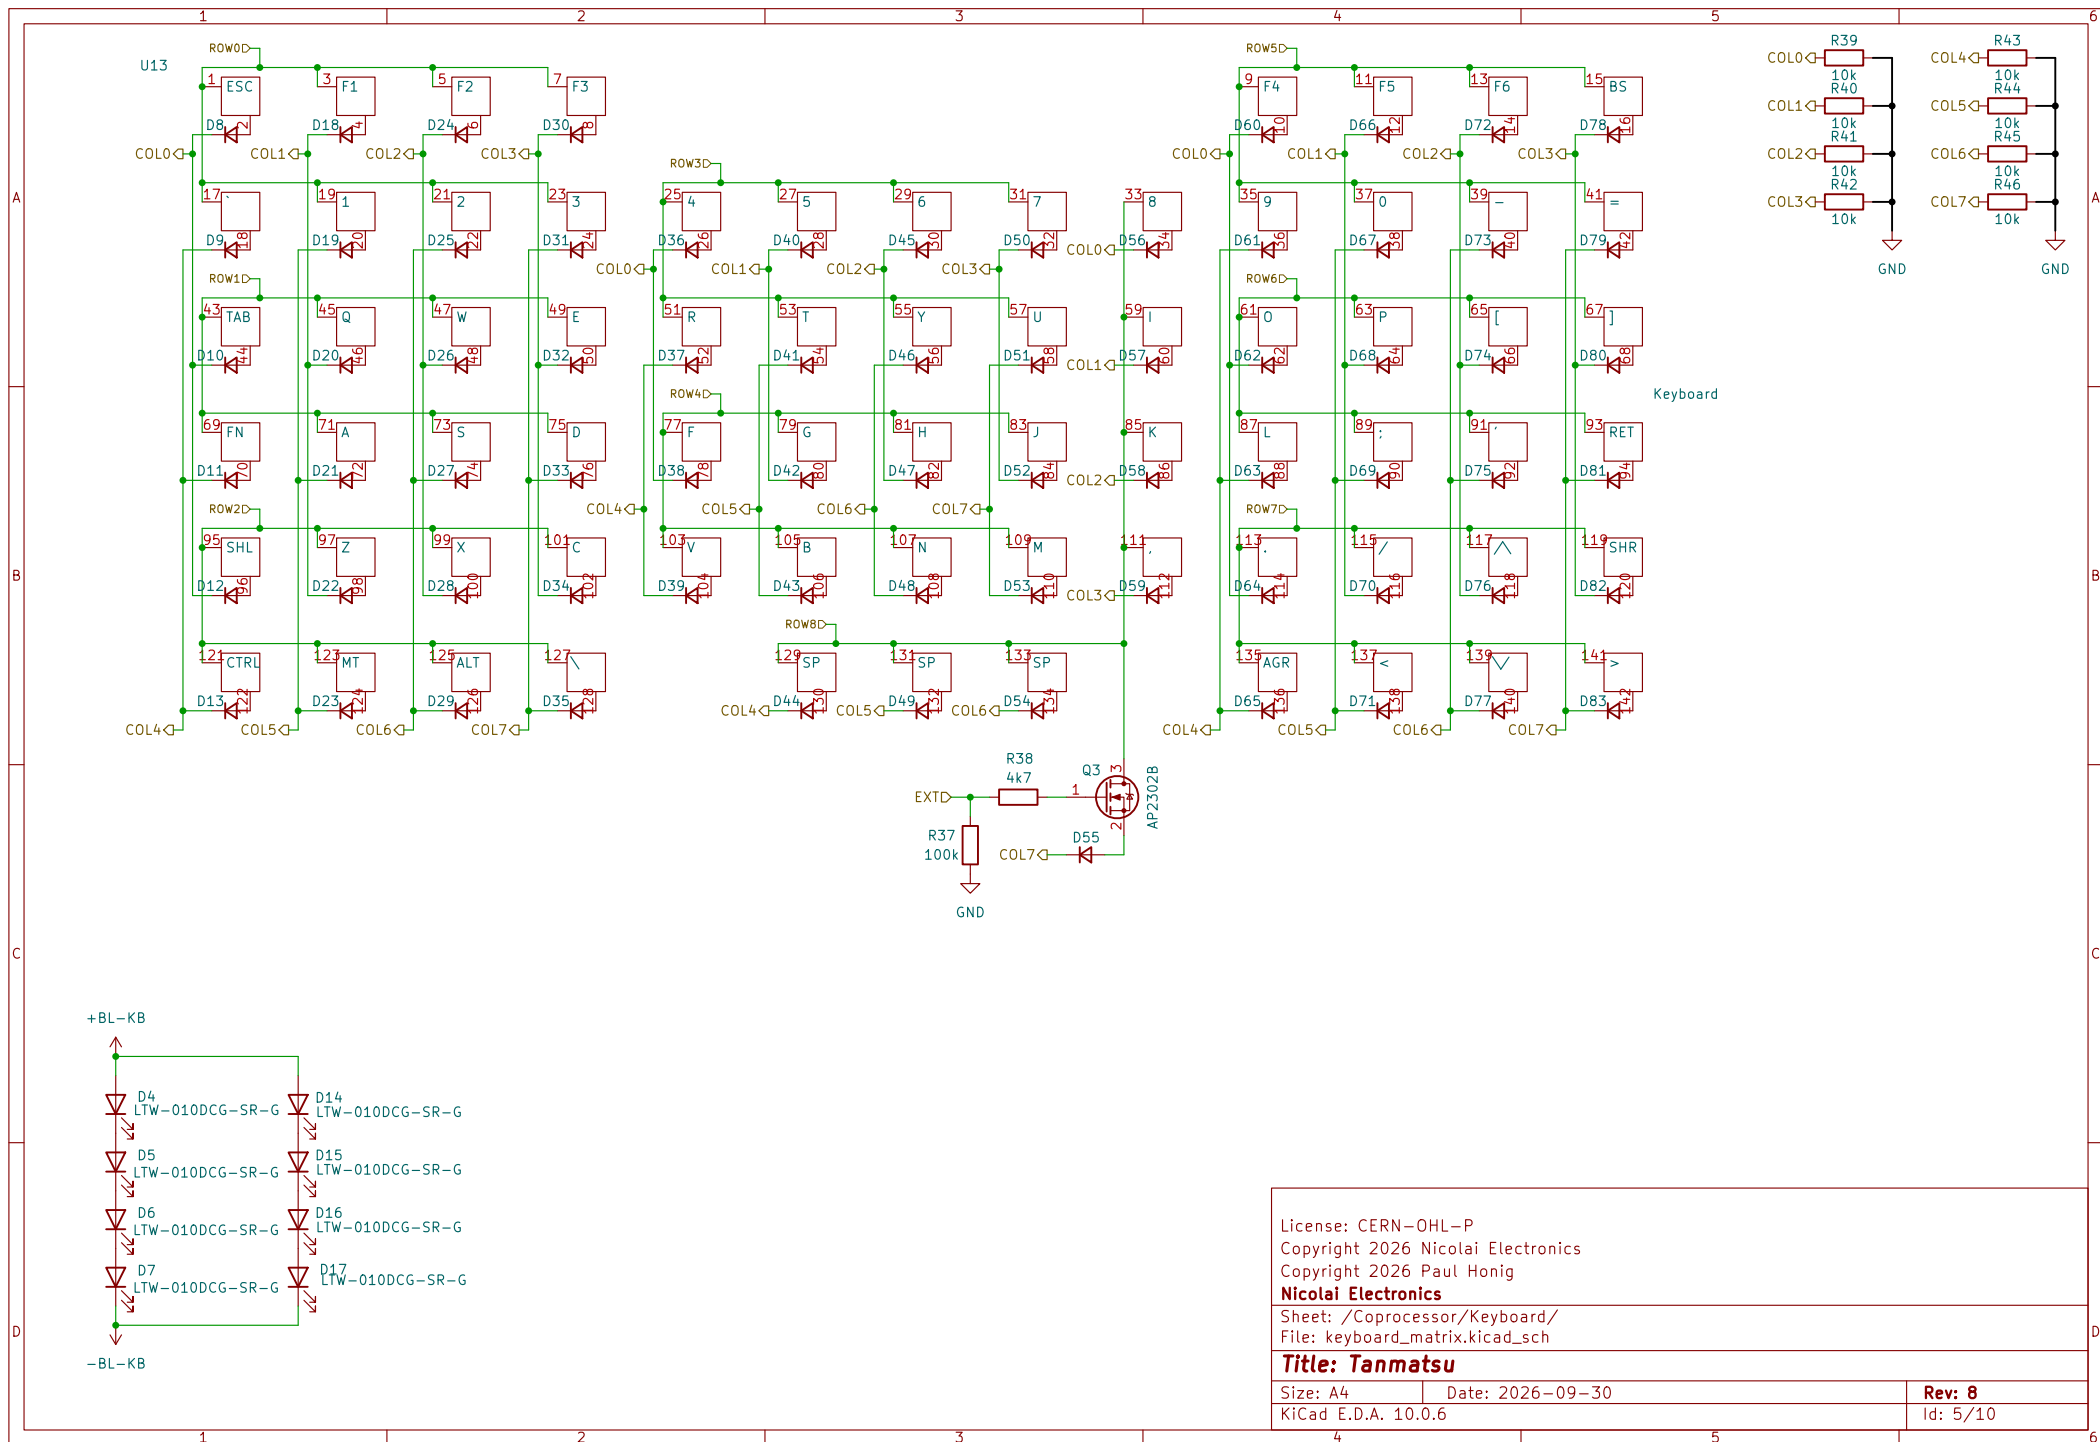

License: CERN-OHL-P
Copyright 2026 Nicolai Electronics
Copyright 2026 Paul Honig

Nicolai Electronics

Sheet: /Coprocesor/Keyboard/
File: keyboard_matrix.kicad_sch

Title: Tanmatsu


Size: A4 Date: 2026-09-30

KiCad E.D.A. 10.0.6

Rev: 8

Id: 5/10

PMIC

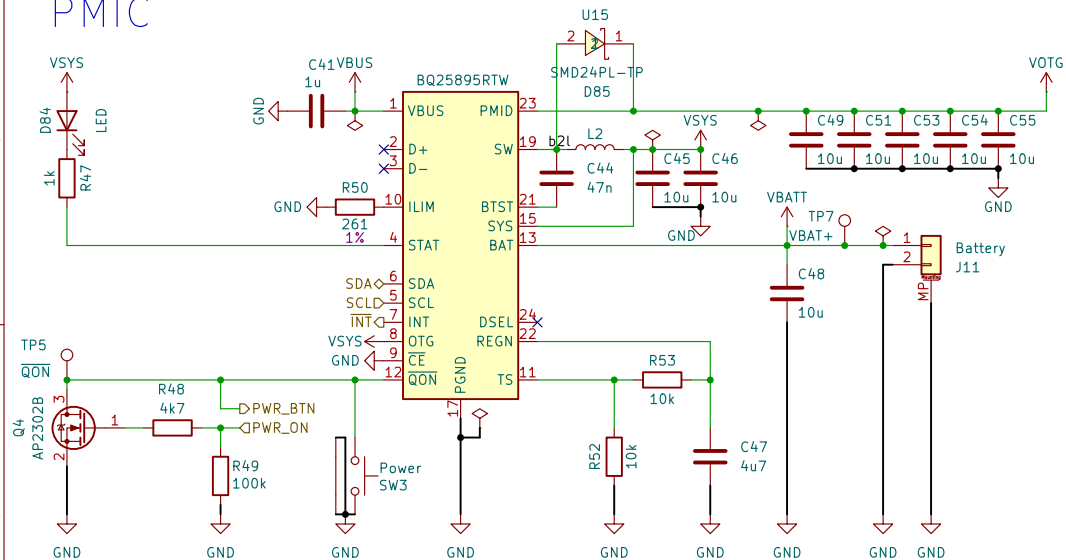

Watch out with the I2C bus of this device, wrong configuration can be dangerous.


VBUS is the voltage coming from the input USB-C port. This voltage can be 5 up to 14 volts.

VOTG is 5V generated from VBATT or VBUS depending on the power source of the system.


VBATT is connected to the rechargeable battery.

VSYS is an unregulated 3.5 to 4.5V output used to power the DC-DC converters for the rest of the components.


3.3v DC/DC

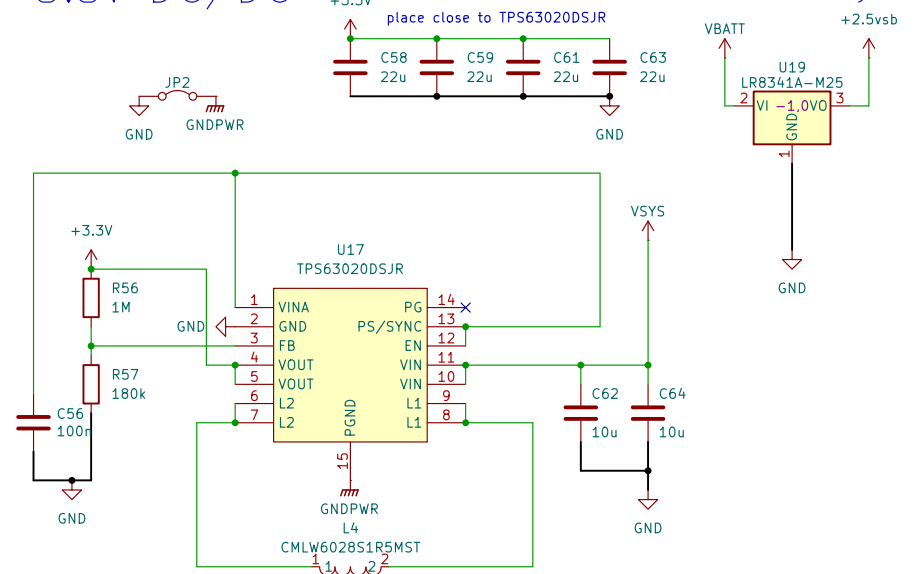


Display backlight DC/DC

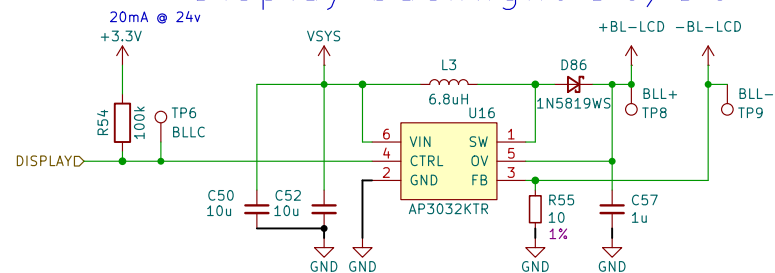

Keyboard backlight DC/DC

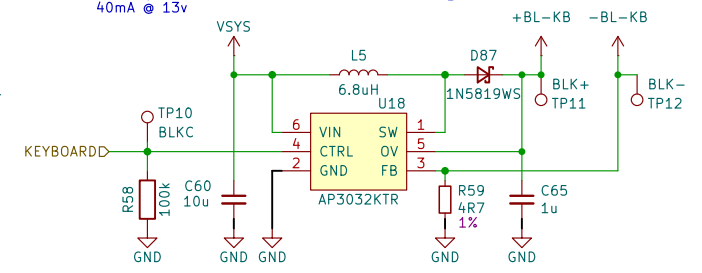

Switched power for USB-A port

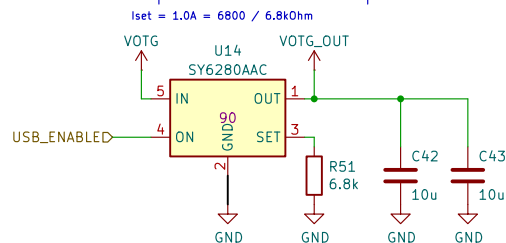

License: CERN-OHL-P
Copyright 2026 Nicolai Electronics
Copyright 2026 Paul Honig

Nicolai Electronics

Sheet: /Power/

File: power.kicad_sch


Title: Tanmatsu


Size: A4 Date: 2026-09-30


KiCad E.D.A. 10.0.6

Rev: 8

Id: 6/10

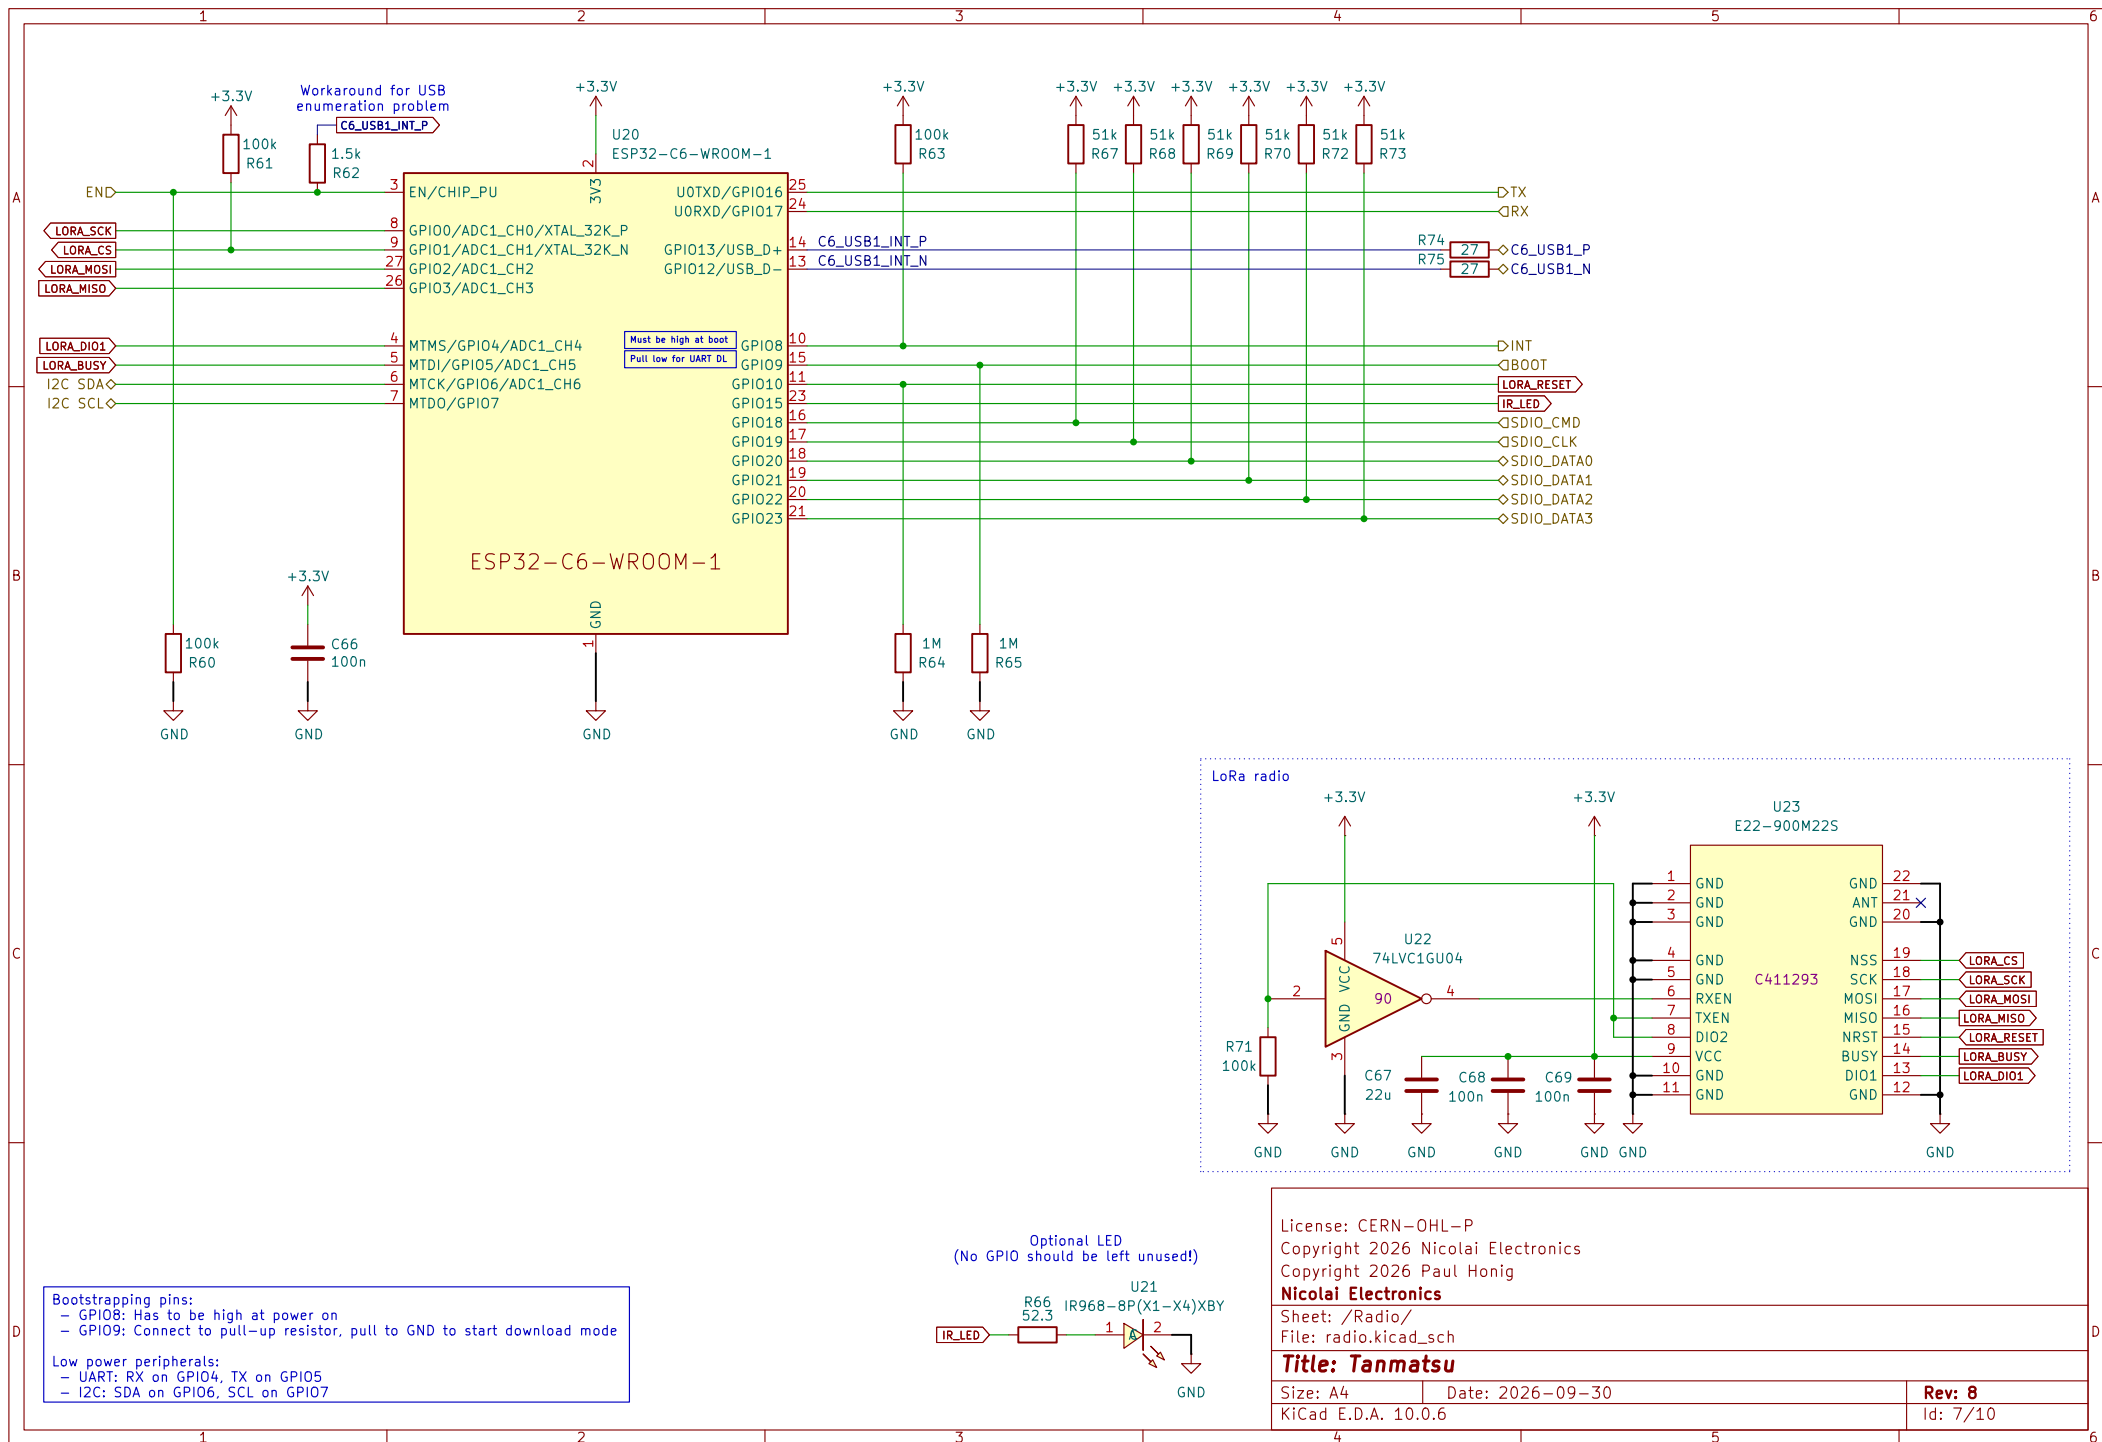

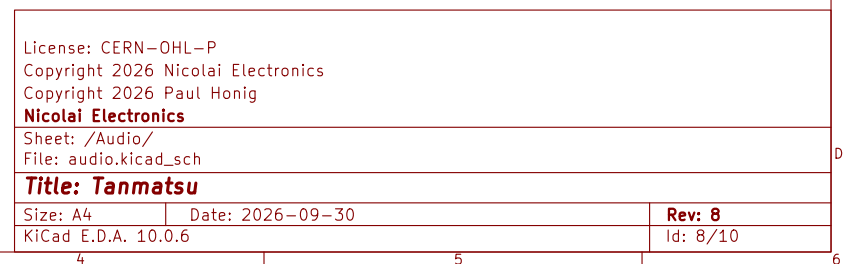

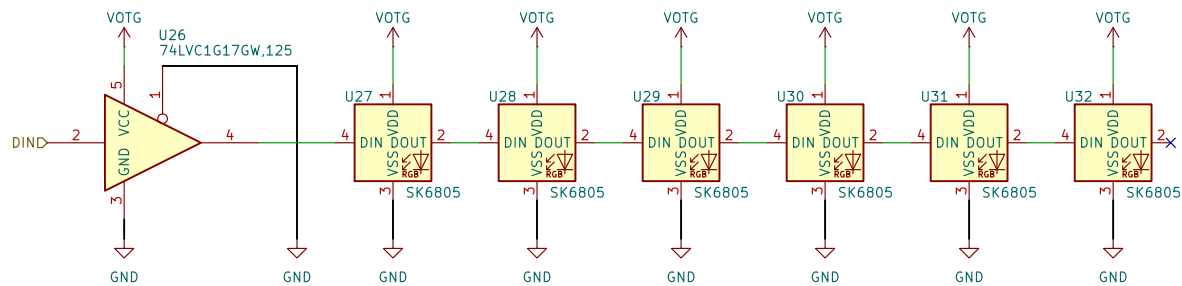

License: CERN-OHL-P
Copyright 2026 Nicolai Electronics
Copyright 2026 Paul Honig

Nicolai Electronics

Sheet: /LEDs/
File: leds.kicad_sch


Title: Tanmatsu

Size: A4 Date: 2026-09-30

KiCad E.D.A. 10.0.6

Rev: 8

Id: 9/10

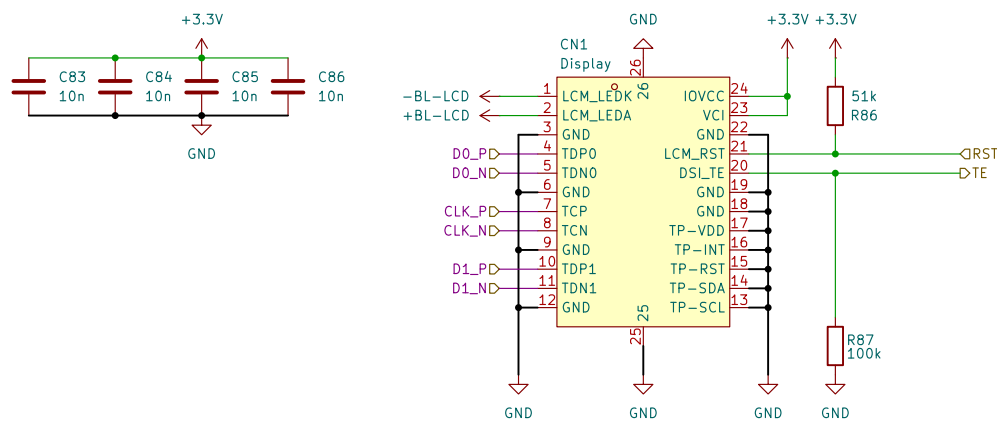

License: CERN-OHL-P
 Copyright 2026 Nicolai Electronics
 Copyright 2026 Paul Honig

Nicolai Electronics

Sheet: /Display/
 File: display.kicad_sch


Title: Tanmatsu

Size: A4 Date: 2026-09-30

KiCad E.D.A. 10.0.6

Rev: 8

Id: 10/10

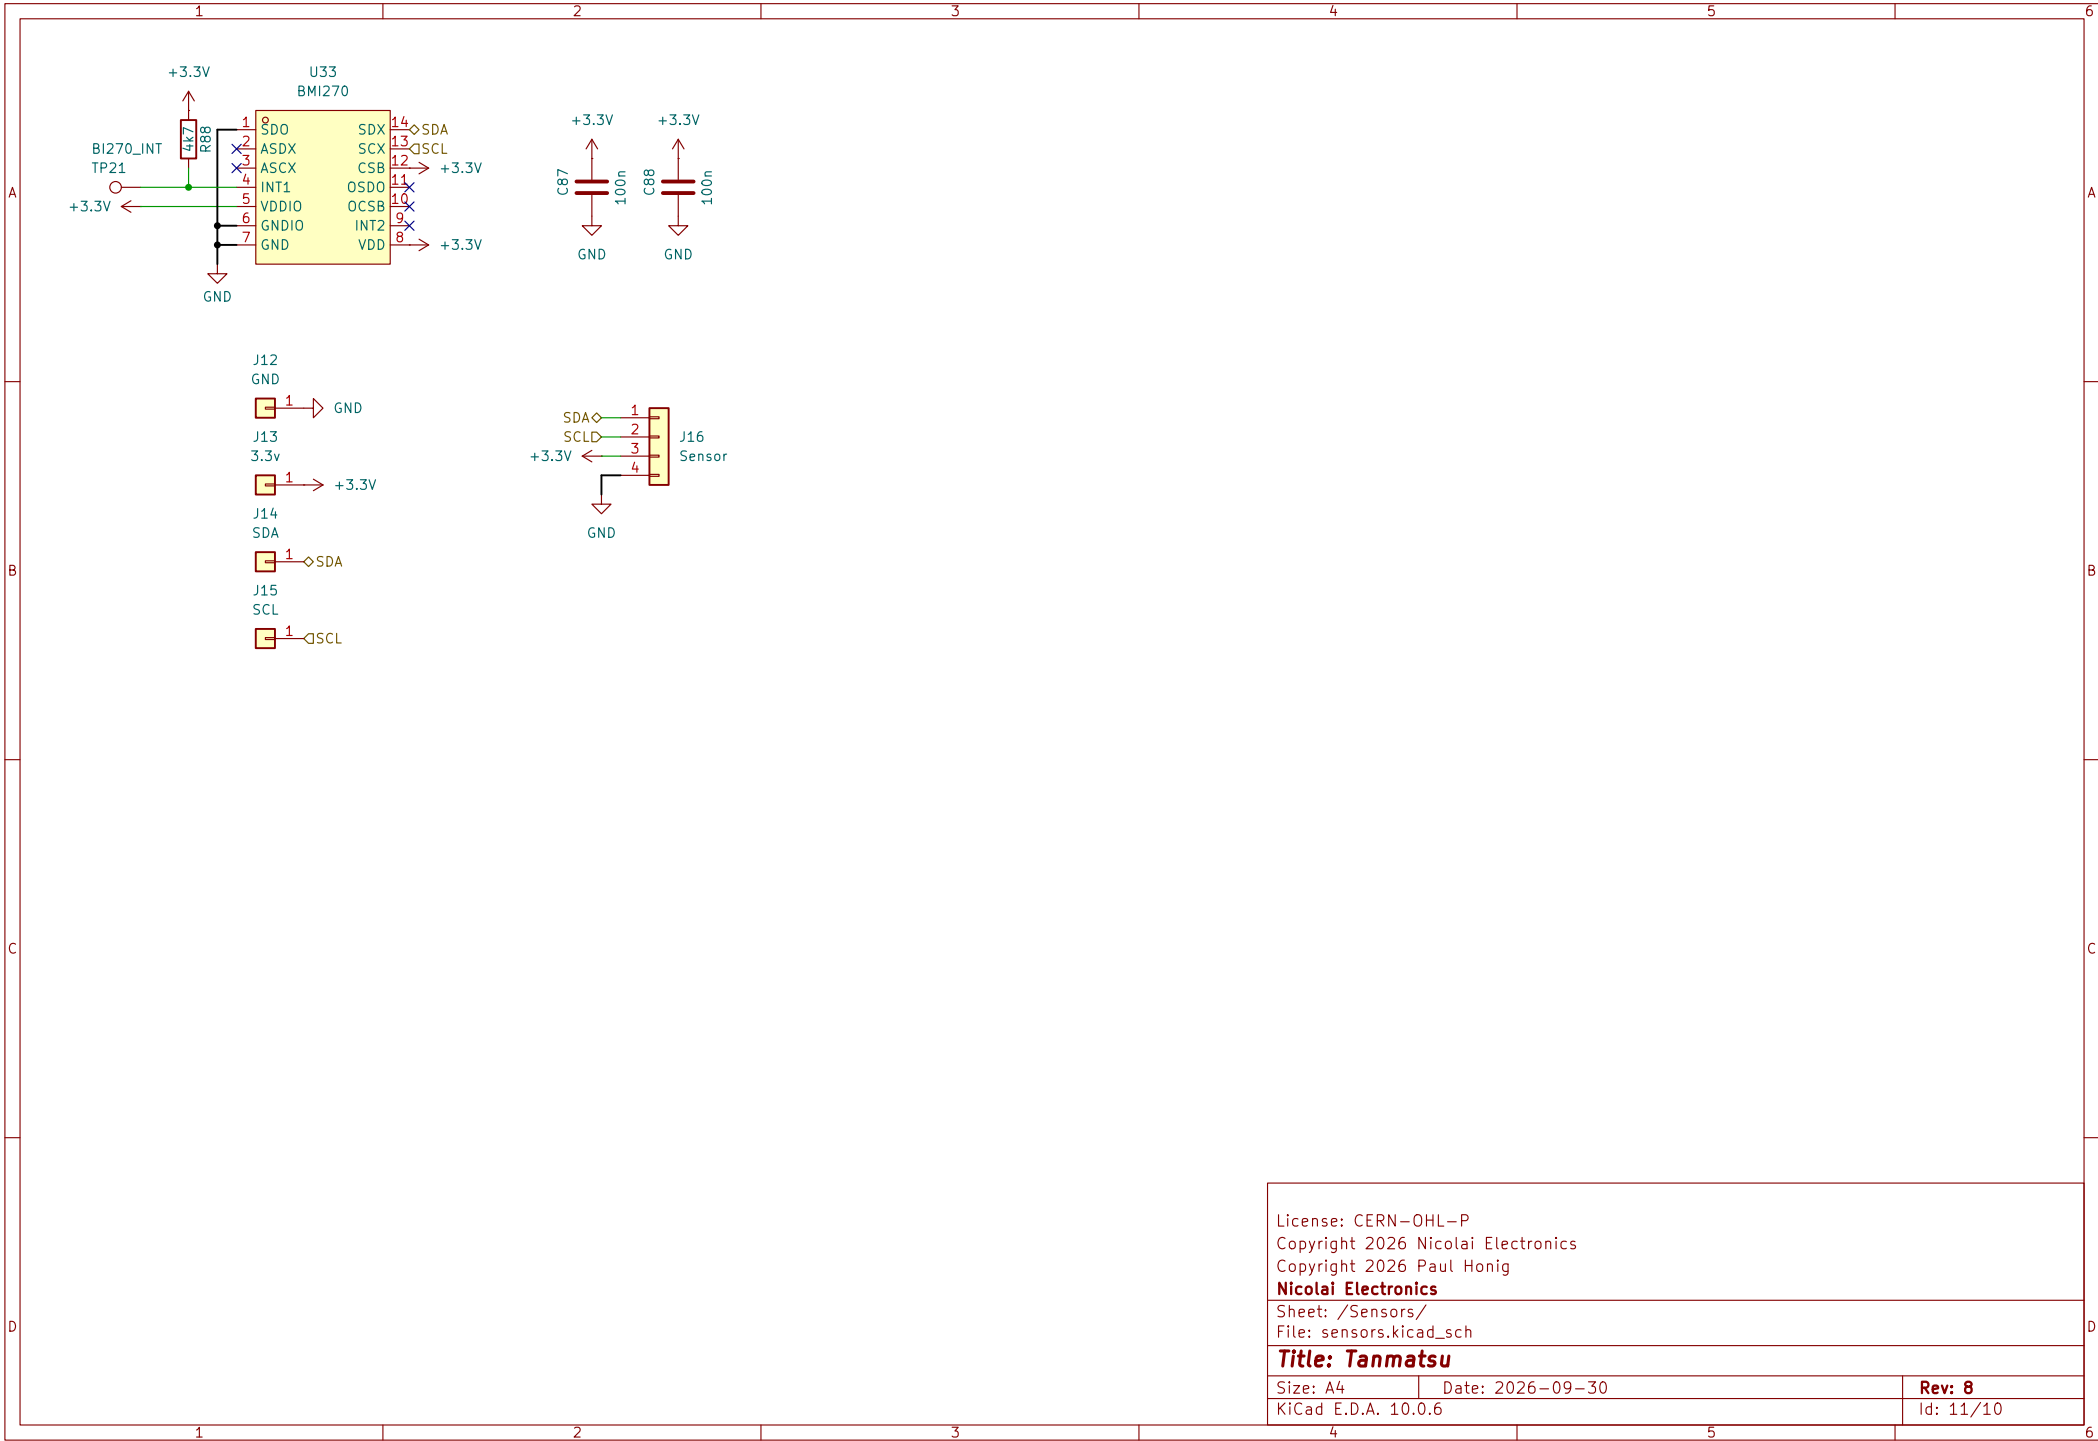

License: CERN-OHL-P
Copyright 2026 Nicolai Electronics
Copyright 2026 Paul Honig

Nicolai Electronics

Sheet: /Sensors/
File: sensors.kicad_sch

Title: Tanmatsu

Size: A4 Date: 2026-09-30
KiCad E.D.A. 10.0.6

Rev: 8
Id: 11/10